



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
VOLVO L70H 624368
Component
Front Axle
Fluid
{not provided} (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

WEAR

All component wear rates are normal.





CONTAMINATION

There is no indication of any contamination in the oil.

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP0008734	VCP316879	---
Sample Date		Client Info		21 Jun 2024	28 Jul 2021	---
Machine Age	hrs	Client Info		0	1959	---
Oil Age	hrs	Client Info		0	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		N/A	Not Changd	---
Filter Changed		Client Info		N/A	Not Changd	---
Sample Status				NORMAL	NORMAL	---
Iron	ppm	ASTM D5185m	>500	273	18	---
Chromium	ppm	ASTM D5185m	>20	3	<1	---
Nickel	ppm	ASTM D5185m	>10	0	0	---
Titanium	ppm	ASTM D5185m		<1	0	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>30	3	0	---
Lead	ppm	ASTM D5185m	>50	0	0	---
Copper	ppm	ASTM D5185m	>120	<1	<1	---
Tin	ppm	ASTM D5185m	>20	0	<1	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	LIGHT	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---
Silicon	ppm	ASTM D5185m	>50	41	11	---
Potassium	ppm	ASTM D5185m	>20	<1	1	---
Water		WC Method	>0.2	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---
Sodium	ppm	ASTM D5185m		3	8	---
Boron	ppm	ASTM D5185m		27	165	---
Barium	ppm	ASTM D5185m		0	0	---
Molybdenum	ppm	ASTM D5185m		2	2	---
Manganese	ppm	ASTM D5185m		3	2	---
Magnesium	ppm	ASTM D5185m		11	10	---
Calcium	ppm	ASTM D5185m		810	4650	---
Phosphorus	ppm	ASTM D5185m		524	1475	---
Zinc	ppm	ASTM D5185m		632	1637	---
Sulfur	ppm	ASTM D5185m		2715	3825	---
Visc @ 40°C	cSt	ASTM D445		56.4	39.8	---

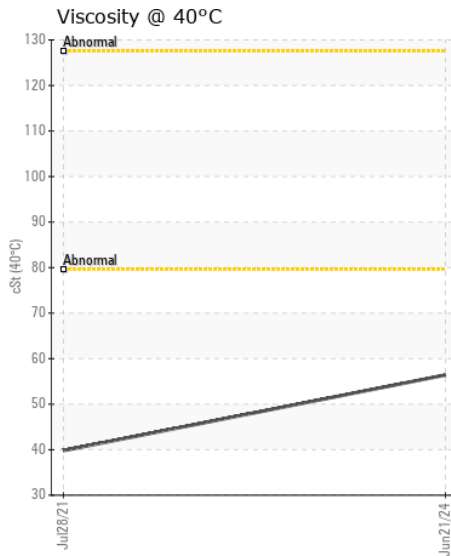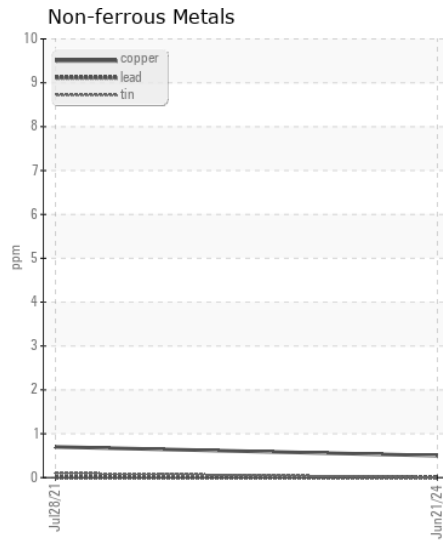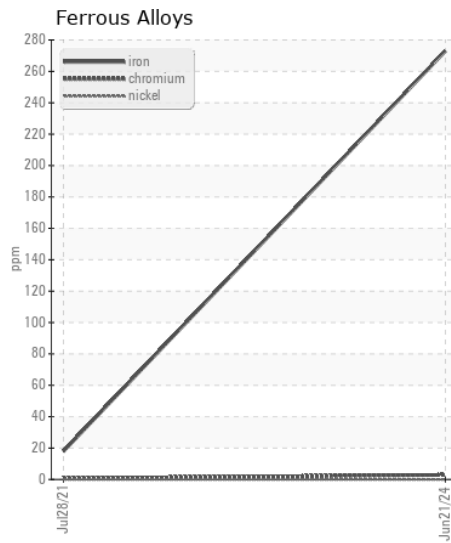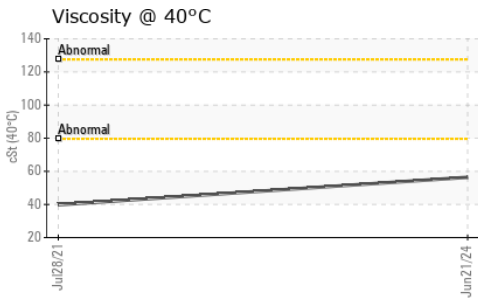

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : VCP0008734

Lab Number : 06227975

Unique Number : 11111468

Test Package : CONST

Received : 03 Jul 2024

Tested : 05 Jul 2024

Diagnosed : 07 Jul 2024 - Don Baldrige

ALTA EQUIPMENT COMPANY

8750 PHILIPS HWY

JACKSONVILLE, FL

US 32256

Contact: TECHNICIAN ACCOUNT

catherine.anastasio@wearcheck.com

T:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: (904)737-1260