

Machine Id VOLVO 314148 Component Rear Right Final Drive Fluid {not provided} (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

WEAR

All component wear rates are normal.

CONTAMINATION


There is no indication of any contamination in the oil.


FLUID CONDITION

The condition of the oil is acceptable for the time in service.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------|----------|----------|
| Sample Number | | Client Info | | VCP0008437 | | |
| Sample Date | | Client Info | | 25 Jun 2024 | | |
| Machine Age | hrs | Client Info | | 0 | | |
| Oil Age | hrs | Client Info | | 0 | | |
| Filter Age | hrs | Client Info | | 0 | | |
| Oil Changed | | Client Info | | N/A | | |
| Filter Changed | | Client Info | | N/A | | |
| Sample Status | | | NORMAL | | | |
| | | | 500 | 4 | | |
| Iron | ppm | ASTM D5185m | >500 | <1 | | |
| Chromium | ppm | ASTM D5185m | >10 | 0 | | |
| Nickel | ppm | ASTM D5185m | >10 | 0 | | |
| Titanium | ppm | ASTM D5185m | | 0 | | |
| Silver | ppm | ASTM D5185m | 05 | 0 | | |
| Aluminum | ppm | ASTM D5185m | >25 | 0 | | |
| Lead | ppm | ASTM D5185m | >25 | 0 | | |
| Copper | ppm | ASTM D5185m | >50 | <1 | | |
| Tin | ppm | ASTM D5185m | >10 | 0 | | |
| Vanadium | ppm | ASTM D5185m | NONE | 0 | | |
| White Metal | scalar | *Visual | NONE | NONE | | |
| | | | | | | |
| Yellow Metal | scalar | *Visual | NONE | NONE | | |
| Yellow Metal Silicon | scalar ppm | *Visual ASTM D5185m | NONE | NONE <1 | | |
| | | | | | | |
| Silicon | ppm | ASTM D5185m | >75 | <1 | | |
| Silicon Potassium | ppm | ASTM D5185m ASTM D5185m | >75 >20 | <1 <1 | | |
| Silicon Potassium Water | ppm ppm | ASTM D5185m ASTM D5185m WC Method | >75 >20 >0.2 | <1 <1 NEG | | |
| Silicon Potassium Water Silt | ppm ppm scalar | ASTM D5185m ASTM D5185m WC Method *Visual | >75 >20 >0.2 NONE | <1 <1 NEG NONE | | |
| Silicon Potassium Water Silt Debris | ppm ppm scalar scalar | ASTM D5185m ASTM D5185m WC Method *Visual *Visual | >75 >20 >0.2 NONE NONE | <1 <1 NEG NONE NONE | | |
| Silicon Potassium Water Silt Debris Sand/Dirt | ppm ppm scalar scalar scalar | ASTM D5185m ASTM D5185m WC Method *Visual *Visual *Visual | >75 >20 >0.2 NONE NONE NONE | <1 <1 NEG NONE NONE NONE | | |
| Silicon Potassium Water Silt Debris Sand/Dirt Appearance | ppm ppm scalar scalar scalar scalar | ASTM D5185m ASTM D5185m WC Method *Visual *Visual *Visual *Visual | >75 >20 >0.2 NONE NONE NONE NORML | <1 <1 NEG NONE NONE NONE NORML | | |
| Silicon Potassium Water Silt Debris Sand/Dirt Appearance Odor Emulsified Water | ppm ppm scalar scalar scalar scalar scalar | ASTM D5185m ASTM D5185m WC Method *Visual *Visual *Visual *Visual *Visual *Visual | >75 >20 >0.2 NONE NONE NONE NORML NORML | <1 <1 NEG NONE NONE NONE NORML NORML NEG | | |
| Silicon Potassium Water Silt Debris Sand/Dirt Appearance Odor Emulsified Water Sodium | ppm ppm scalar scalar scalar scalar scalar scalar | ASTM D5185m ASTM D5185m WC Method *Visual *Visual *Visual *Visual *Visual *Visual ASTM D5185m | >75 >20 >0.2 NONE NONE NONE NORML NORML | <1 <1 NEG NONE NONE NORML NORML NEG 2 | | |
| Silicon Potassium Water Silt Debris Sand/Dirt Appearance Odor Emulsified Water Sodium Boron | ppm ppm scalar scalar scalar scalar scalar scalar | ASTM D5185m ASTM D5185m WC Method *Visual *Visual *Visual *Visual *Visual *Visual ASTM D5185m | >75 >20 >0.2 NONE NONE NONE NORML NORML | <1 <1 NEG NONE NONE NORML NORML NEG 2 274 | | |
| Silicon Potassium Water Silt Debris Sand/Dirt Appearance Odor Emulsified Water Sodium Boron Barium | ppm ppm scalar scalar scalar scalar scalar scalar ppm ppm | ASTM D5185m ASTM D5185m WC Method *Visual *Visual *Visual *Visual *Visual *Visual ASTM D5185m ASTM D5185m | >75 >20 >0.2 NONE NONE NONE NORML NORML | <1 <1 NEG NONE NONE NORML NORML NEG 2 274 <1 | | |
| Silicon Potassium Water Silt Debris Sand/Dirt Appearance Odor Emulsified Water Sodium Boron Barium Molybdenum | ppm ppm scalar scalar scalar scalar scalar scalar ppm | ASTM D5185m ASTM D5185m WC Method *Visual *Visual *Visual *Visual *Visual *Visual ASTM D5185m ASTM D5185m ASTM D5185m | >75 >20 >0.2 NONE NONE NONE NORML NORML | <1 <1 NEG NONE NONE NORML NORML NEG 2 274 <1 0 | | |
| Silicon Potassium Water Silt Debris Sand/Dirt Appearance Odor Emulsified Water Sodium Boron Barium Molybdenum Manganese | ppm ppm scalar scalar scalar scalar scalar scalar ppm ppm ppm | ASTM D5185m ASTM D5185m WC Method *Visual *Visual *Visual *Visual *Visual *Visual ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m | >75 >20 >0.2 NONE NONE NONE NORML NORML | <1 <1 NEG NONE NONE NORML NORML NEG 2 274 <1 0 0 | | |
| Silicon Potassium Water Silt Debris Sand/Dirt Appearance Odor Emulsified Water Sodium Boron Barium Molybdenum Manganese Magnesium | ppm ppm scalar scalar scalar scalar scalar scalar ppm ppm | ASTM D5185m ASTM D5185m WC Method *Visual *Visual *Visual *Visual *Visual ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m | >75 >20 >0.2 NONE NONE NONE NORML NORML | <1 <1 NEG NONE NONE NORML NORML NEG 2 274 <1 0 0 1 | | |
| Silicon Potassium Water Silt Debris Sand/Dirt Appearance Odor Emulsified Water Sodium Boron Barium Molybdenum Manganese Magnesium | ppm ppm scalar scalar scalar scalar scalar ppm ppm ppm ppm ppm | ASTM D5185m ASTM D5185m WC Method *Visual *Visual *Visual *Visual *Visual ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m | >75 >20 >0.2 NONE NONE NONE NORML NORML | <1 <1 NEG NONE NONE NORML NORML NEG 2 274 <1 0 0 1 1 3 | | |
| Silicon Potassium Water Silt Debris Sand/Dirt Appearance Odor Emulsified Water Sodium Boron Barium Molybdenum Manganese Magnesium Calcium | ppm ppm scalar scalar scalar scalar scalar ppm ppm ppm ppm | ASTM D5185m ASTM D5185m WC Method *Visual *Visual *Visual *Visual *Visual *Visual ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m | >75 >20 >0.2 NONE NONE NONE NORML NORML | <1 <1 NEG NONE NONE NORML NORML NEG 2 274 <1 0 0 1 13 2438 | | |
| Silicon Potassium Water Silt Debris Sand/Dirt Appearance Odor Emulsified Water Sodium Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc | ppm ppm scalar scalar scalar scalar scalar ppm ppm ppm ppm ppm ppm ppm | ASTM D5185m ASTM D5185m WC Method *Visual *Visual *Visual *Visual *Visual *Visual ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m | >75 >20 >0.2 NONE NONE NONE NORML NORML | <1 <1 NEG NONE NONE NORML NORML NEG 2 274 <1 0 0 1 1 13 2438 17 | | |
| Silicon Potassium Water Silt Debris Sand/Dirt Appearance Odor Emulsified Water Sodium Boron Barium Molybdenum Manganese Magnesium Calcium | ppm ppm scalar scalar scalar scalar scalar ppm ppm ppm ppm ppm | ASTM D5185m ASTM D5185m WC Method *Visual *Visual *Visual *Visual *Visual *Visual ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m | >75 >20 >0.2 NONE NONE NONE NORML NORML | <1 <1 NEG NONE NONE NORML NORML NEG 2 274 <1 0 0 1 13 2438 | | |

Submitted By: TECHNICIAN ACCOUNT

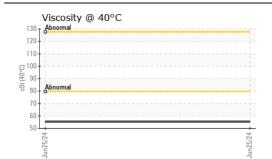

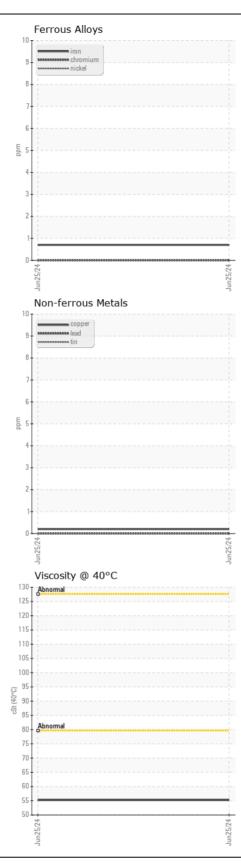

ALTA EQUIPMENT COMPANY Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513 Sample No. : VCP0008437 Received : 03 Jul 2024 8750 PHILIPS HWY Lab Number : 06227978 Tested JACKSONVILLE, FL : 07 Jul 2024 Unique Number : 11111471 Diagnosed : 07 Jul 2024 - Don Baldridge US 32256 Test Package : CONST Contact: TECHNICIAN ACCOUNT Certificate L2367 To discuss this sample report, contact Customer Service at 1-800-237-1369. catherine.anastasio@wearcheck.com * - Denotes test methods that are outside of the ISO 17025 scope of accreditation. T: Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) F: (904)737-1260

Submitted By: TECHNICIAN ACCOUNT Page 2 of 2