



TRAAP

Texas Refinery Advanced Analysis Program

# OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id  
**JOHN DEERE 328E 273658**

Component  
**Diesel Engine**

Fluid  
**TRC PRO-SPEC IV SYN BLEND SAE 15W40 (14 QTS)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		TR06228166	---	---
Sample Date		Client Info		25 Mar 2024	---	---
Machine Age	hrs	Client Info		3880	---	---
Oil Age	hrs	Client Info		200	---	---
Filter Age	hrs	Client Info		200	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>80	12	---	---
Chromium	ppm	ASTM D5185m	>6	<1	---	---
Nickel	ppm	ASTM D5185m	>2	<1	---	---
Titanium	ppm	ASTM D5185m	>2	<1	---	---
Silver	ppm	ASTM D5185m	>2	0	---	---
Aluminum	ppm	ASTM D5185m	>20	4	---	---
Lead	ppm	ASTM D5185m	>95	<1	---	---
Copper	ppm	ASTM D5185m	>85	2	---	---
Tin	ppm	ASTM D5185m	>9	<1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

## CONTAMINATION













There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	8	---	---
Potassium	ppm	ASTM D5185m	>20	3	---	---
Fuel		WC Method	>4.0	<1.0	---	---
Water		WC Method	>0.1	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844		0.2	---	---
Nitration	Abs/cm	*ASTM D7624	>20	12.0	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	23.4	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

## FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		2	---	---
Boron	ppm	ASTM D5185m	0	<1	---	---
Barium	ppm	ASTM D5185m	0	0	---	---
Molybdenum	ppm	ASTM D5185m	0	5	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m	9	21	---	---
Calcium	ppm	ASTM D5185m	2300	5269	---	---
Phosphorus	ppm	ASTM D5185m	1000	939	---	---
Zinc	ppm	ASTM D5185m	1200	1192	---	---
Sulfur	ppm	ASTM D5185m	3100	4488	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.4	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	14	12.59	---	---
Visc @ 100°C	cSt	ASTM D445	15.5	15.8	---	---

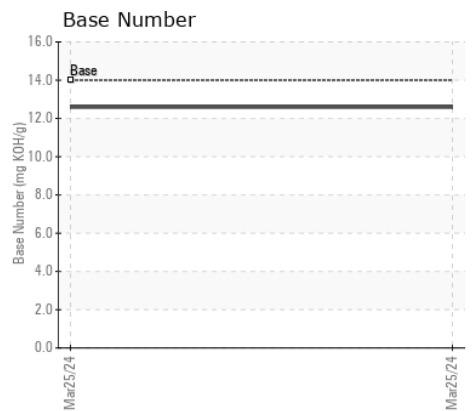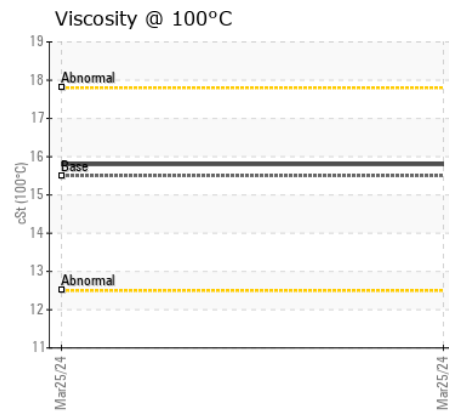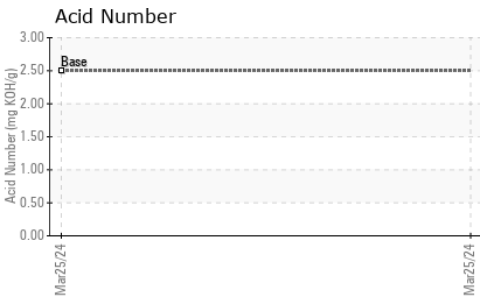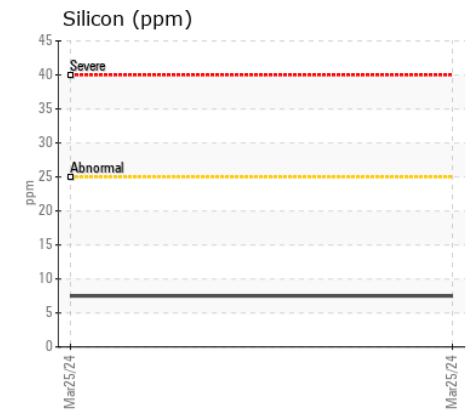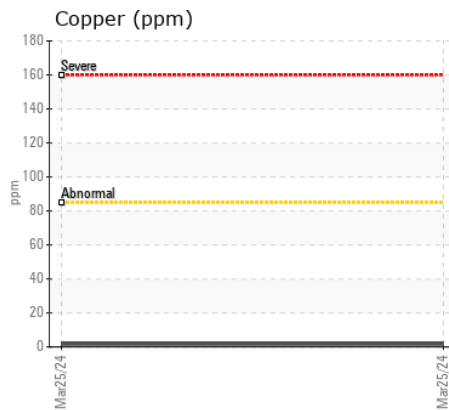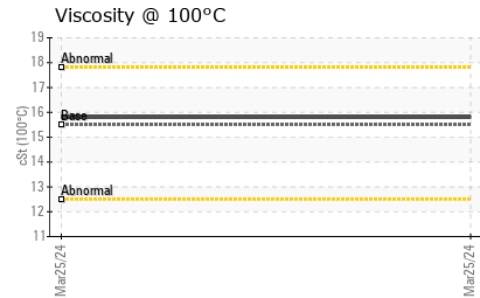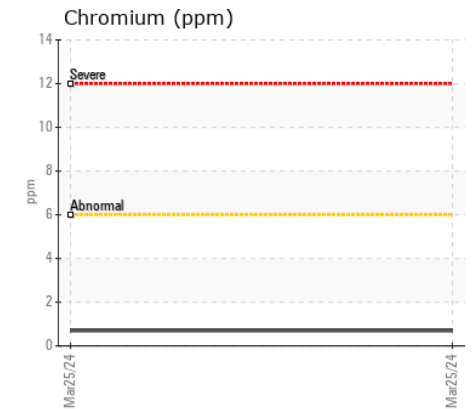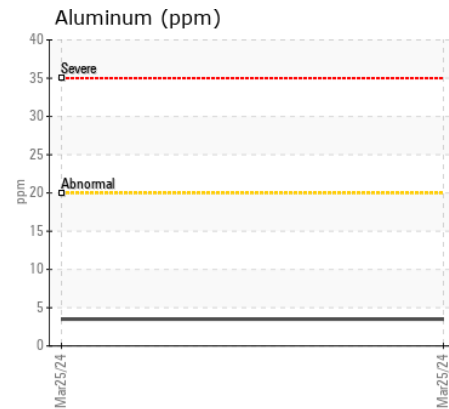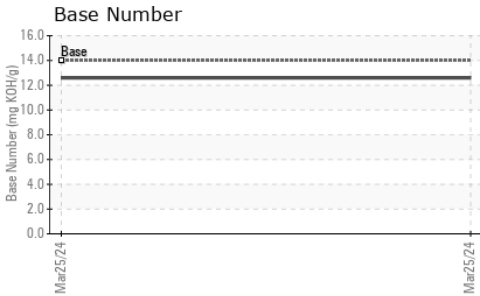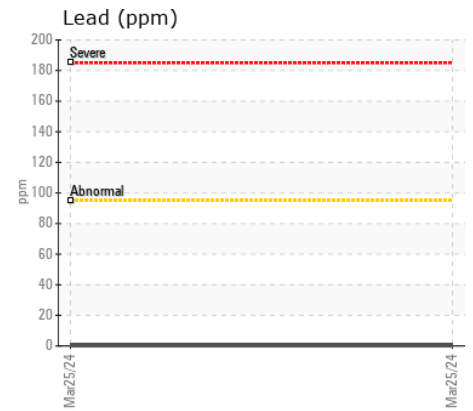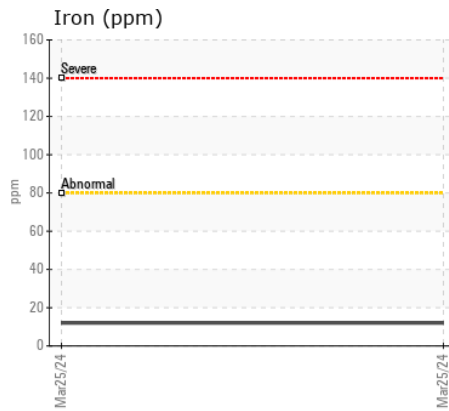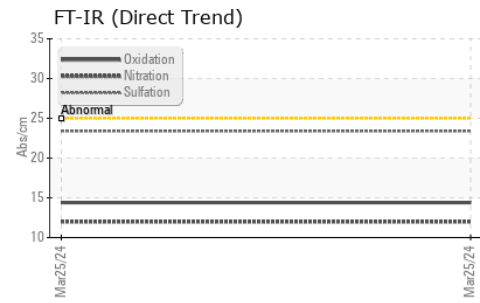

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : TR06228166 **Received** : 03 Jul 2024  
**Lab Number** : 06228166 **Tested** : 08 Jul 2024  
**Unique Number** : 11111659 **Diagnosed** : 08 Jul 2024 - Angela Borella  
**Test Package** : MOB 2 ( Additional Tests: TAN Man )

**ZACHRY FARMS**  
 15231 COUNTY FARM RD  
 CARLYLE, IL  
 US 62231  
 Contact: CHARLES FLATT

To discuss this sample report, contact Customer Service at 1-800-827-0711.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: