



ASCENDUM

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
VOLVO A45G 353567
Component
Diesel Engine
Fluid
VOLVO ULTRA DIESEL ENGINE OIL 15W40 VDS-3 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ASC0011395	ASC0006429	VCP432742
Sample Date		Client Info		01 Jul 2024	30 Nov 2023	30 Aug 2023
Machine Age	hrs	Client Info		2082	947	472
Oil Age	hrs	Client Info		1607	475	472
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	N/A	Changed
Filter Changed		Client Info		Changed	N/A	Changed
Sample Status				NORMAL	ATTENTION	ABNORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	13	10	24
Chromium	ppm	ASTM D5185m	>20	1	<1	2
Nickel	ppm	ASTM D5185m	>2	3	2	3
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>25	2	2	<1
Lead	ppm	ASTM D5185m	>40	<1	0	5
Copper	ppm	ASTM D5185m	>330	52	380	▲ 444
Tin	ppm	ASTM D5185m	>15	1	2	4
Vanadium	ppm	ASTM D5185m		<1	0	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	6	9	32
Potassium	ppm	ASTM D5185m	>20	<1	2	2
Fuel		WC Method	>6.0	<1.0	<1.0	1.2
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.3	0.3	0.3
Nitration	Abs/cm	*ASTM D7624	>20	7.2	7.4	9.4
Sulfation	Abs/.1mm	*ASTM D7415	>30	19.4	18.8	18.6
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<1	1	5
Boron	ppm	ASTM D5185m	2.5	2	8	51
Barium	ppm	ASTM D5185m	0.0	0	<1	0
Molybdenum	ppm	ASTM D5185m	0.7	67	62	91
Manganese	ppm	ASTM D5185m	0.0	<1	<1	2
Magnesium	ppm	ASTM D5185m	256	1011	807	20
Calcium	ppm	ASTM D5185m	2057	1193	1183	2281
Phosphorus	ppm	ASTM D5185m	935	917	1029	1016
Zinc	ppm	ASTM D5185m	1223	1314	1200	1272
Sulfur	ppm	ASTM D5185m	4079	2915	3004	4604
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.1	14.2	13.7
Base Number (BN)	mg KOH/g	ASTM D2896	10	7.8	7.7	6.1
Visc @ 100°C	cSt	ASTM D445	15.0	12.5	● 12.4	● 10.8

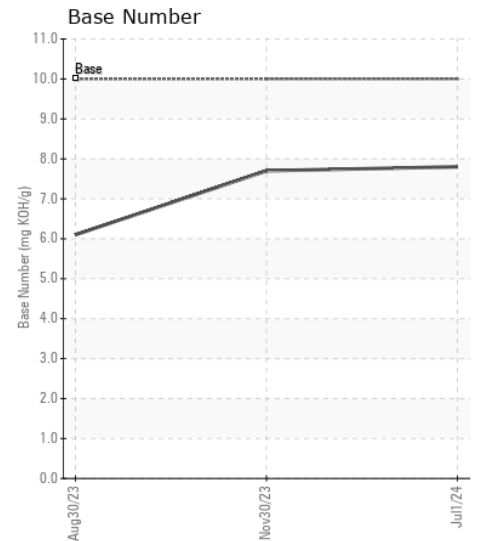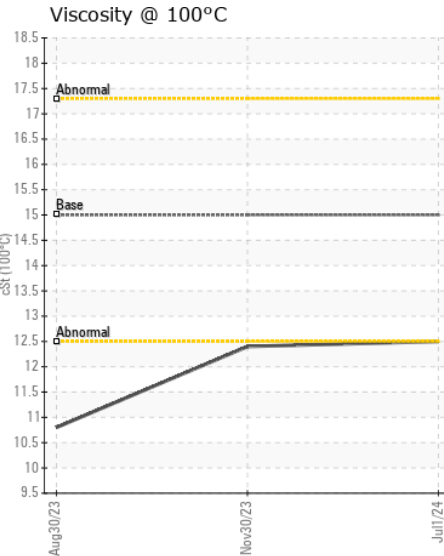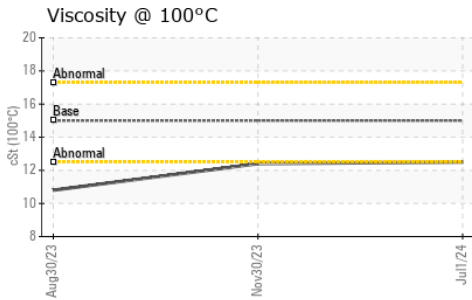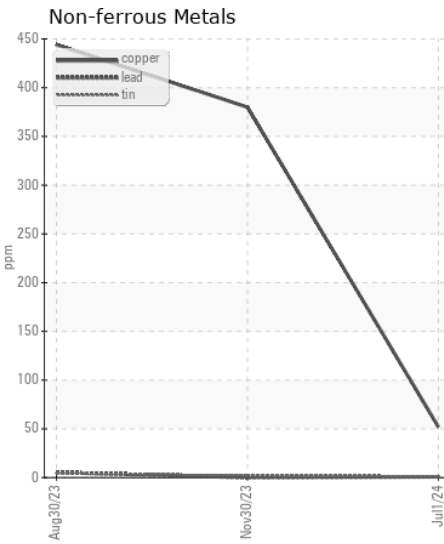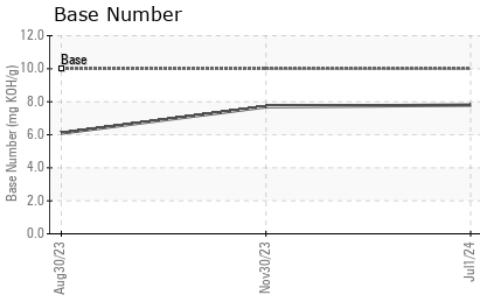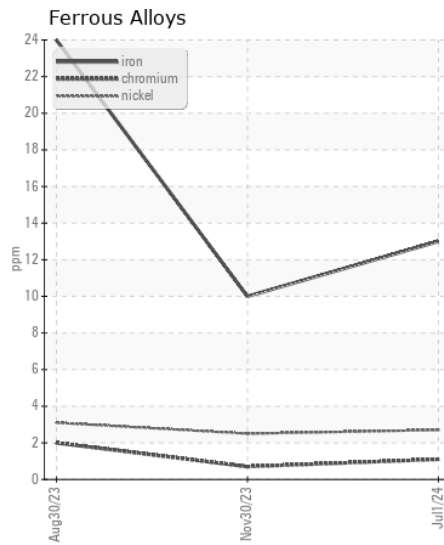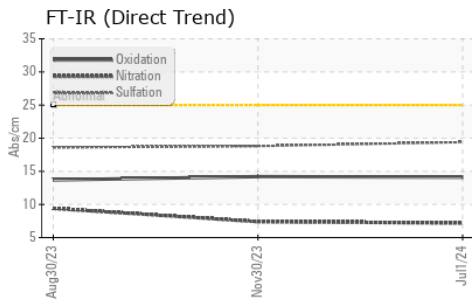

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ASC0011395 **Received** : 03 Jul 2024
Lab Number : 06228216 **Tested** : 08 Jul 2024
Unique Number : 11111709 **Diagnosed** : 08 Jul 2024 - Jonathan Hester
Test Package : CONST (Additional Tests: TBN)

117 - ASCENDUM MACHINERY INC - GREENVILLE
 2002 N GREENE ST
 GREENVILLE, NC
 US 27834
 Contact: BRANDON JENKINS
 BRANDON.JENKINS@ASCENDUMMACHINERY.COM
 T:
 F: (704)494-8197

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)