



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**934037**  
Component  
**Natural Gas Engine**  
Fluid  
**PETRO CANADA 15W40 (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0121996</b>	GFL0116550	GFL0122059
Sample Date		Client Info		<b>01 Jul 2024</b>	10 Jun 2024	23 May 2024
Machine Age	hrs	Client Info		<b>1465</b>	1465	1344
Oil Age	hrs	Client Info		<b>884</b>	1005	1056
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Not Changd</b>	Not Changd	Not Changd
Filter Changed		Client Info		<b>Not Changd</b>	Not Changd	Not Changd
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>50	<b>16</b>	16	14
Chromium	ppm	ASTM D5185m	>4	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>2	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m		<b>0</b>	0	0
Silver	ppm	ASTM D5185m	>3	<b>&lt;1</b>	0	<1
Aluminum	ppm	ASTM D5185m	>9	<b>7</b>	6	5
Lead	ppm	ASTM D5185m	>30	<b>0</b>	1	1
Copper	ppm	ASTM D5185m	>35	<b>1</b>	2	2
Tin	ppm	ASTM D5185m	>4	<b>&lt;1</b>	<1	1
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>+100	<b>9</b>	8	8
Potassium	ppm	ASTM D5185m	>20	<b>12</b>	10	9
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844		<b>0.1</b>	0	0
Nitration	Abs/cm	*ASTM D7624	>20	<b>11.8</b>	11.3	11.7
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>24.5</b>	22.6	22.0
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>7</b>	7	7
Boron	ppm	ASTM D5185m		<b>11</b>	7	7
Barium	ppm	ASTM D5185m		<b>0</b>	<1	0
Molybdenum	ppm	ASTM D5185m		<b>58</b>	57	51
Manganese	ppm	ASTM D5185m		<b>2</b>	2	2
Magnesium	ppm	ASTM D5185m		<b>653</b>	628	578
Calcium	ppm	ASTM D5185m		<b>1741</b>	1902	1575
Phosphorus	ppm	ASTM D5185m		<b>792</b>	804	726
Zinc	ppm	ASTM D5185m		<b>1064</b>	1073	960
Sulfur	ppm	ASTM D5185m		<b>2872</b>	3005	2660
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>21.2</b>	19.2	19.2
Base Number (BN)	mg KOH/g	ASTM D2896		<b>3.7</b>	4.5	4.8
Visc @ 100°C	cSt	ASTM D445		<b>15.0</b>	12.9	15.0


**FT-IR (Direct Trend)**

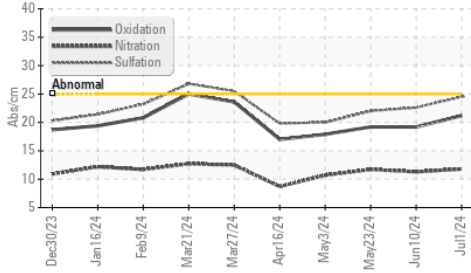


**Ferrous Alloys**

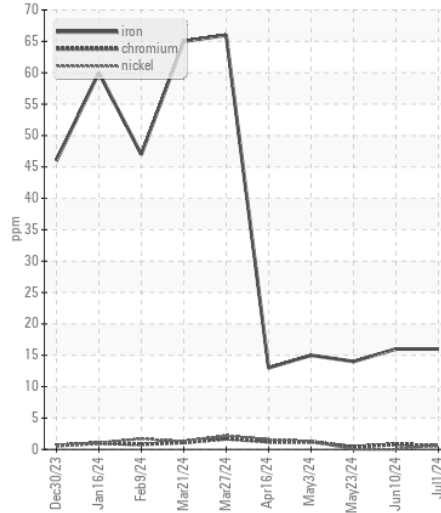


**Base Number**

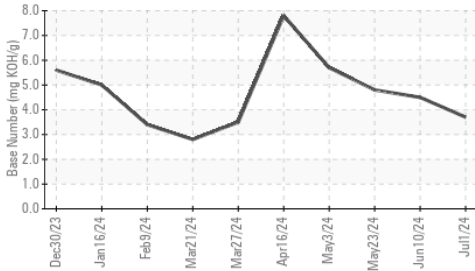


**Non-ferrous Metals**

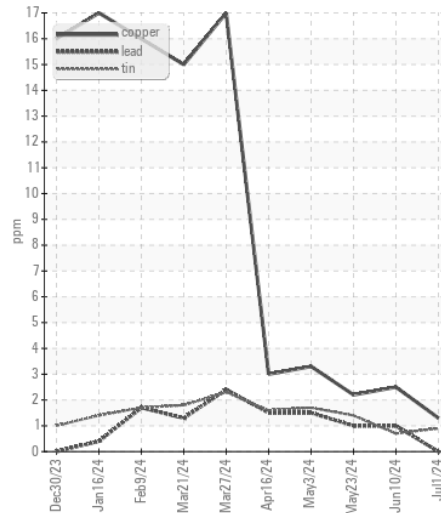


**Viscosity @ 100°C**

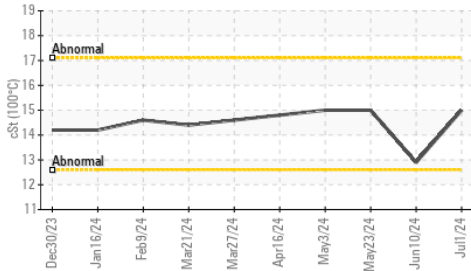

**Viscosity @ 100°C**

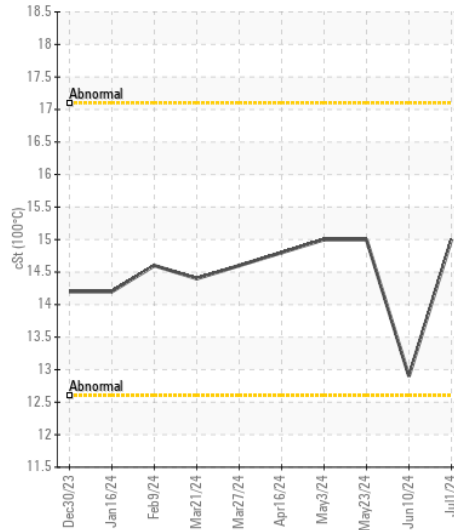

**Base Number**

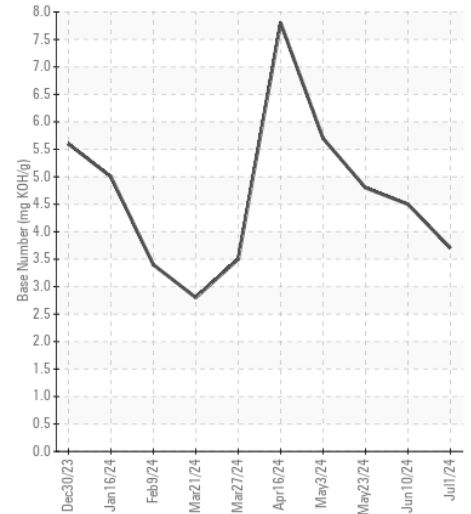

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0121996  
**Lab Number** : 06228265  
**Unique Number** : 11111758  
**Test Package** : FLEET

**Received** : 05 Jul 2024  
**Tested** : 05 Jul 2024  
**Diagnosed** : 05 Jul 2024 - Wes Davis

**GFL Environmental - 652 - Fredericksburg Hauling**  
 10954 Houser Drive  
 Fredericksburg, VA  
 US 22408  
 Contact: WILLIAM MILO  
 wmilo@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: