



WEAR	NORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 460E 1DW460ETPEE664155
 Component
Hydraulic System
 Fluid
JOHN DEERE HYDRAU (64 GAL)

RECOMMENDATION

We recommend you service the filters on this component. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0224908	JR0199962	JR0180107
Sample Date		Client Info		01 Jul 2024	18 Mar 2024	12 Oct 2023
Machine Age	hrs	Client Info		8982	8469	7988
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Chngd	Not Chngd	Changed
Filter Changed		Client Info		Not Chngd	Not Chngd	Changed
Sample Status				ABNORMAL	ABNORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>50	14	10	17
Iron	ppm	ASTM D5185m	>71	2	1	21
Chromium	ppm	ASTM D5185m	>11	<1	<1	5
Nickel	ppm	ASTM D5185m	>6	0	0	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>11	2	2	4
Lead	ppm	ASTM D5185m	>13	0	0	0
Copper	ppm	ASTM D5185m	>21	5	7	7
Tin	ppm	ASTM D5185m	>5	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION











There is a high amount of particulates present in the oil.

Silicon	ppm	ASTM D5185m	>24	9	10	13
Potassium	ppm	ASTM D5185m	>20	<1	0	1
Water		WC Method	>0.075	NEG	NEG	NEG
Particles >4µm		ASTM D7647	>80000	51274	27457	40663
Particles >6µm		ASTM D7647	>5000	▲ 18211	▲ 12196	92
Particles >14µm		ASTM D7647	>640	▲ 1147	▲ 1840	9
Particles >21µm		ASTM D7647	>160	▲ 169	▲ 451	2
Particles >38µm		ASTM D7647	>40	2	4	0
Particles >71µm		ASTM D7647	>10	0	0	0
Oil Cleanliness		ISO 4406 (c)	>23/19/16	▲ 23/21/17	▲ 22/21/18	23/14/10
Silt	scalar	*Visual	NONE	LIGHT	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.075	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>21	1	0	5
Boron	ppm	ASTM D5185m		67	72	49
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	1	5
Manganese	ppm	ASTM D5185m		<1	0	<1
Magnesium	ppm	ASTM D5185m		50	41	155
Calcium	ppm	ASTM D5185m	87	2360	2604	2476
Phosphorus	ppm	ASTM D5185m	727	1004	1031	1023
Zinc	ppm	ASTM D5185m	900	1247	1292	1258
Sulfur	ppm	ASTM D5185m	1500	5575	5772	4914
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.83	0.84	1.14
Visc @ 40°C	cSt	ASTM D445	65	59.6	61.1	54.4

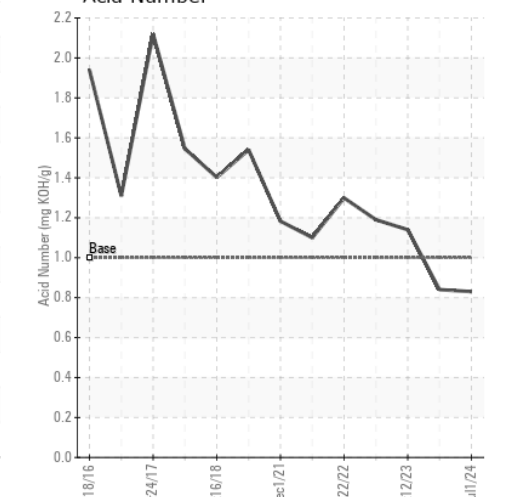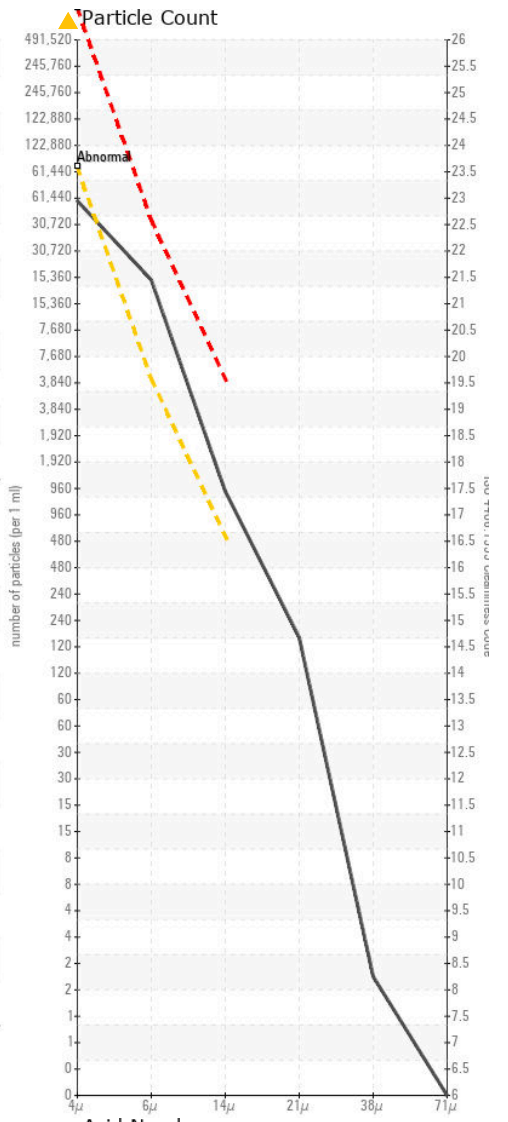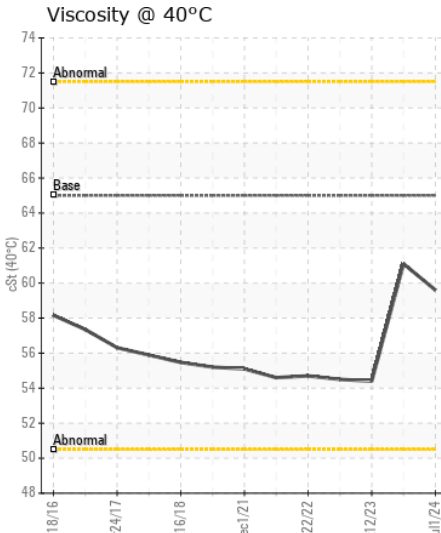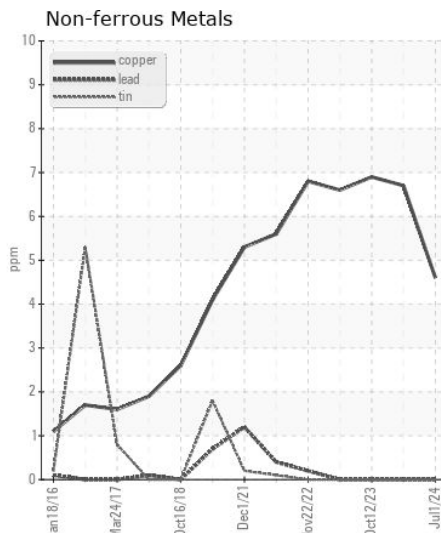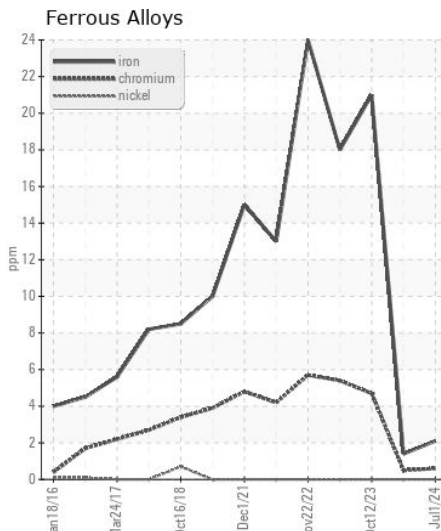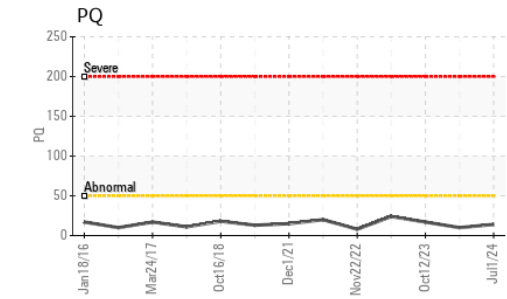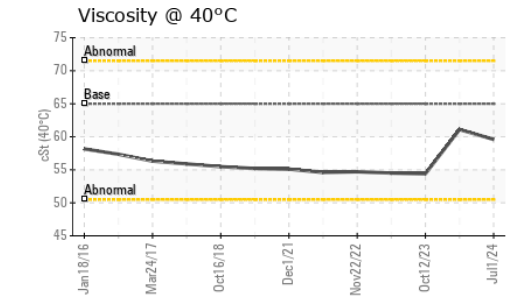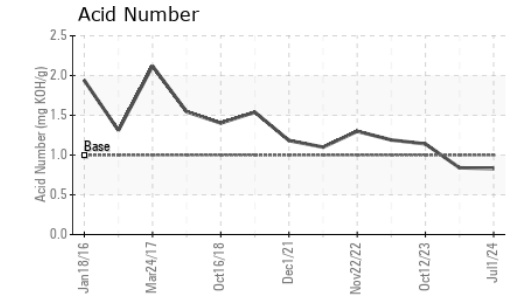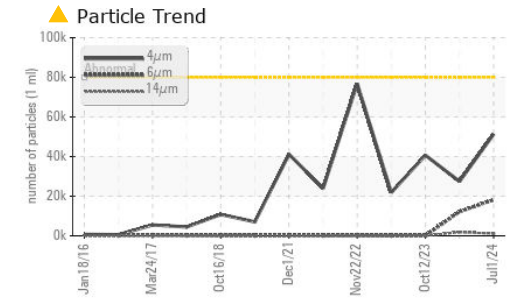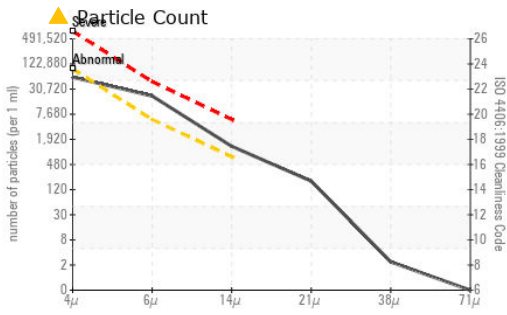

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0224908 **Received** : 05 Jul 2024
Lab Number : 06228434 **Tested** : 08 Jul 2024
Unique Number : 11111927 **Diagnosed** : 08 Jul 2024 - Jonathan Hester
Test Package : CONST (Additional Tests: PQ)

J.E. LIESFELD CONTRACTOR
 1851 BENNINGTON RD
 ROCKVILLE, VA
 US 23146
 Contact: CIELO NAVA-OVALLE
 cielo@liesfeld.com

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)