



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 700L 1T0700LXTNF426018

Component
Left Final Drive

Fluid
{not provided} (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0222465	JR0174394	---
Sample Date		Client Info		02 Jul 2024	04 Jan 2024	---
Machine Age	hrs	Client Info		1450	1113	---
Oil Age	hrs	Client Info		1450	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Not Changd	N/A	---
Filter Changed		Client Info		N/A	N/A	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>1250	112	173	---
Iron	ppm	ASTM D5185m	>750	132	130	---
Chromium	ppm	ASTM D5185m	>9	<1	1	---
Nickel	ppm	ASTM D5185m	>10	1	0	---
Titanium	ppm	ASTM D5185m		<1	<1	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>40	11	2	---
Lead	ppm	ASTM D5185m	>15	0	<1	---
Copper	ppm	ASTM D5185m	>40	1	0	---
Tin	ppm	ASTM D5185m	>10	0	<1	---
Vanadium	ppm	ASTM D5185m		<1	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	42	12	---
Potassium	ppm	ASTM D5185m	>20	2	7	---
Water		WC Method	>0.075	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	MODER	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.075	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	3	3	---
Boron	ppm	ASTM D5185m		<1	<1	---
Barium	ppm	ASTM D5185m		0	0	---
Molybdenum	ppm	ASTM D5185m		3	0	---
Manganese	ppm	ASTM D5185m		2	3	---
Magnesium	ppm	ASTM D5185m		57	94	---
Calcium	ppm	ASTM D5185m		3630	3275	---
Phosphorus	ppm	ASTM D5185m		963	1036	---
Zinc	ppm	ASTM D5185m		1096	1200	---
Sulfur	ppm	ASTM D5185m		4364	3276	---
Visc @ 40°C	cSt	ASTM D445		75.0	51.0	---

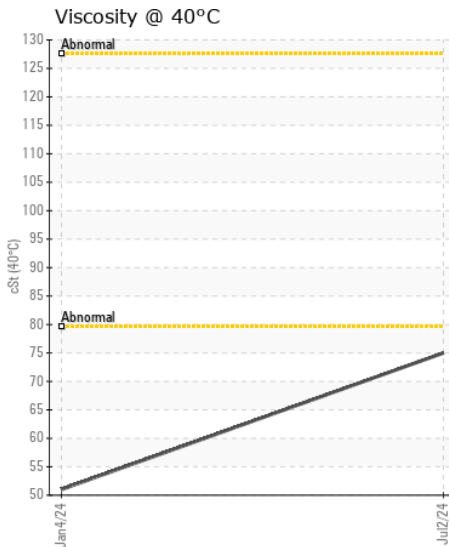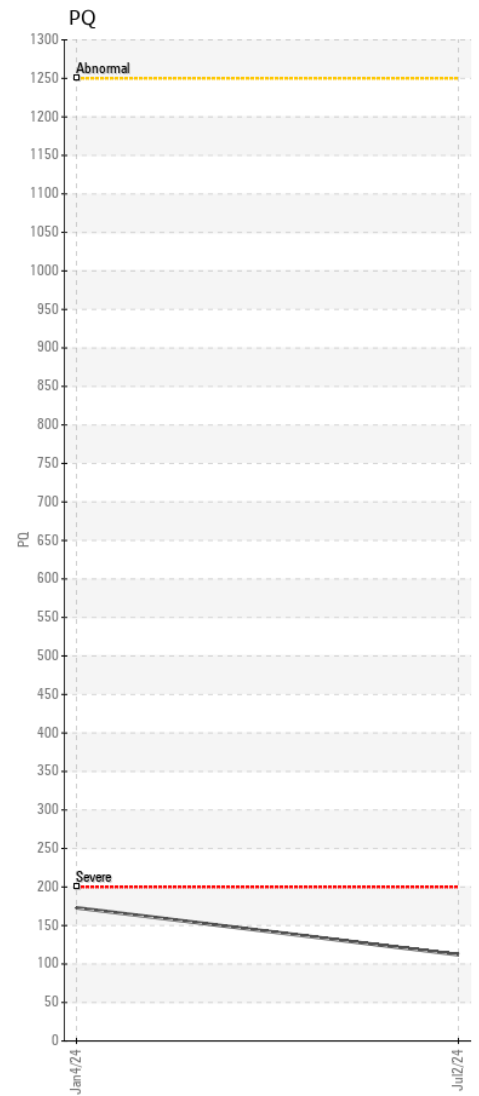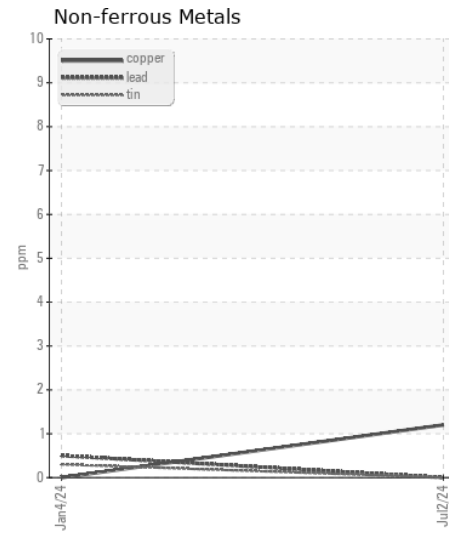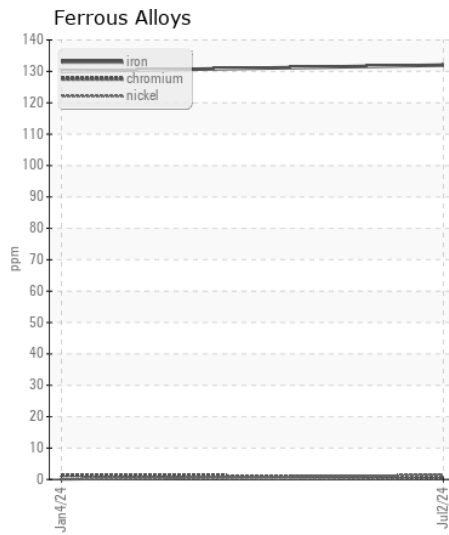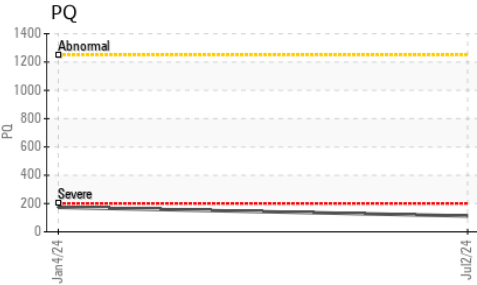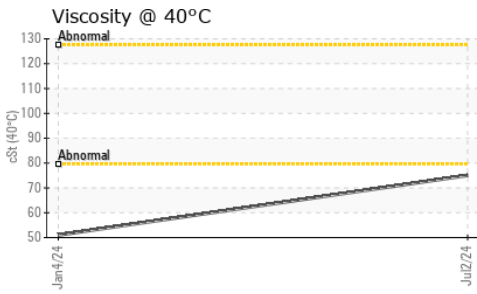

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0222465 **Received** : 05 Jul 2024
Lab Number : 06228886 **Tested** : 08 Jul 2024
Unique Number : 11112379 **Diagnosed** : 08 Jul 2024 - Don Baldridge
Test Package : CONST (Additional Tests: PQ)

JRE - GARNER
 4161 AUBURN CHURCH RD
 GARNER, NC
 US 27529

Contact: RALEIGH SHOP
 sean.betts@jamesriverequipment.com; catherine.anastasio@wearcheck.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (919)614-2260
 F: (919)779-5432