



# OIL ANALYSIS REPORT

WEAR  
CONTAMINATION  
FLUID CONDITION

**ATTENTION**  
**ABNORMAL**  
**NORMAL**



Area  
**{unassigned}**  
Machine Id  
**JOHN DEERE 750L 1T0750LXTLF386960**  
Component  
**Right Outer Final Drive**  
Fluid  
**JOHN DEERE HY-GARD HYD/TRANS (4 GAL)**

## RECOMMENDATION

We advise that you check all areas where dirt can enter the system. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>LEC0049797</b>	LEC0038750	LEC0031635
Sample Date		Client Info		<b>01 Jul 2024</b>	17 Feb 2023	06 Jun 2022
Machine Age	hrs	Client Info		<b>2358</b>	1629	1071
Oil Age	hrs	Client Info		<b>1287</b>	558	1071
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Changed</b>	Not Changd	Changed
Filter Changed		Client Info		<b>N/A</b>	None	None
Sample Status				<b>ABNORMAL</b>	NORMAL	NORMAL

## WEAR

Aluminum ppm levels are noted. All other component wear rates are normal.

PQ		ASTM D8184	>1250	<b>49</b>	76	71
Iron	ppm	ASTM D5185m	>750	<b>220</b>	100	91
Chromium	ppm	ASTM D5185m	>9	<b>1</b>	<1	1
Nickel	ppm	ASTM D5185m	>10	<b>2</b>	<1	0
Titanium	ppm	ASTM D5185m		<b>2</b>	1	<1
Silver	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m	>40	<b>45</b>	14	3
Lead	ppm	ASTM D5185m	>15	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>40	<b>&lt;1</b>	<1	<1
Tin	ppm	ASTM D5185m	>10	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	MODER
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

## CONTAMINATION









Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress.

Silicon	ppm	ASTM D5185m	>75	<b>▲ 120</b>	60	12
Potassium	ppm	ASTM D5185m	>20	<b>12</b>	5	5
Water		WC Method	>0.075	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.075	<b>NEG</b>	NEG	NEG

## FLUID CONDITION

The oil is no longer serviceable due to the presence of contaminants.

Sodium	ppm	ASTM D5185m	>51	<b>5</b>	1	1
Boron	ppm	ASTM D5185m	6	<b>0</b>	3	4
Barium	ppm	ASTM D5185m	0	<b>&lt;1</b>	0	4
Molybdenum	ppm	ASTM D5185m	0	<b>4</b>	3	<1
Manganese	ppm	ASTM D5185m		<b>3</b>	1	1
Magnesium	ppm	ASTM D5185m	145	<b>110</b>	104	103
Calcium	ppm	ASTM D5185m	3570	<b>3701</b>	3259	3427
Phosphorus	ppm	ASTM D5185m	1290	<b>1072</b>	1000	1005
Zinc	ppm	ASTM D5185m	1640	<b>1249</b>	1203	1256
Sulfur	ppm	ASTM D5185m		<b>4090</b>	3161	3507
Visc @ 40°C	cSt	ASTM D445	57.0	<b>52.5</b>	55.0	52.2

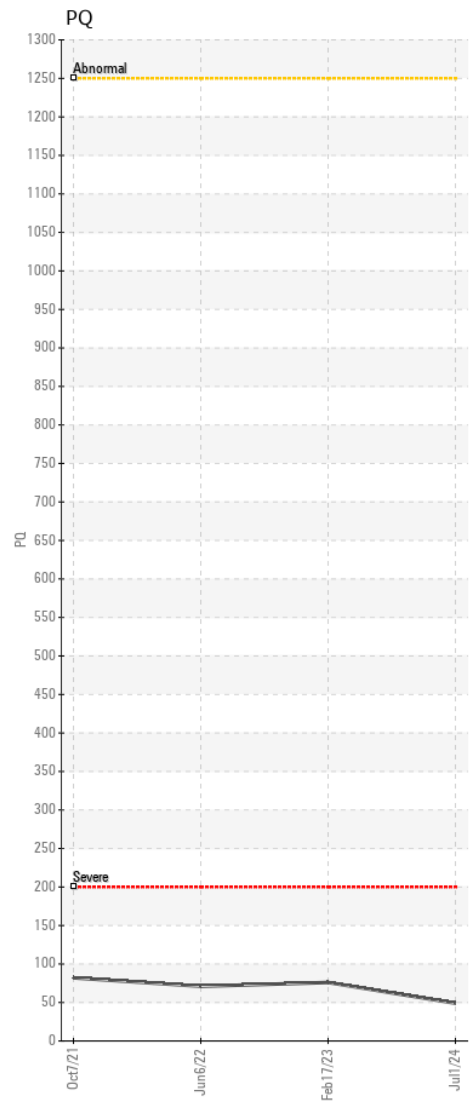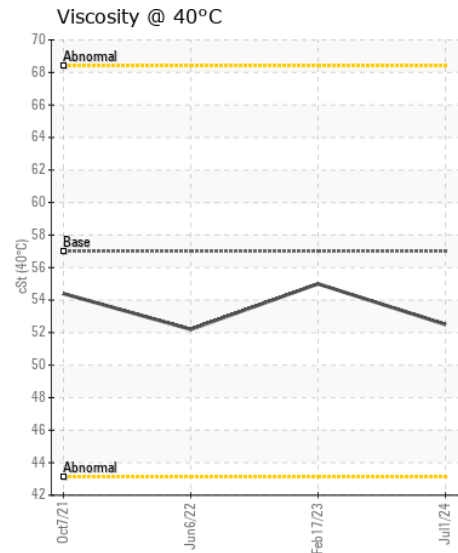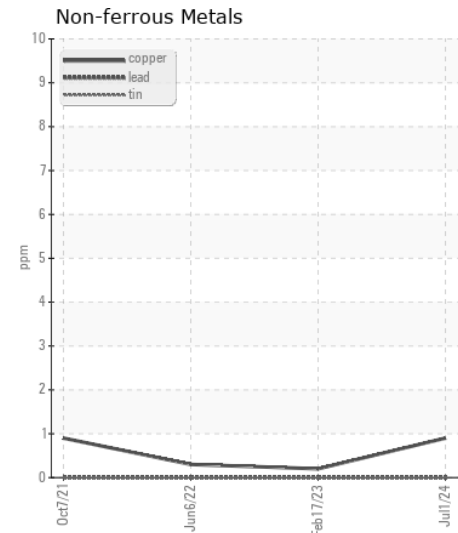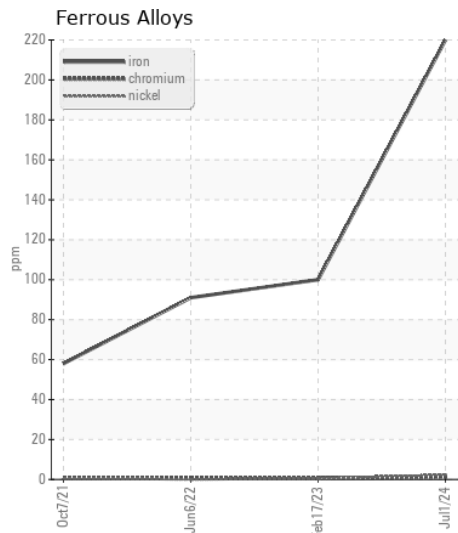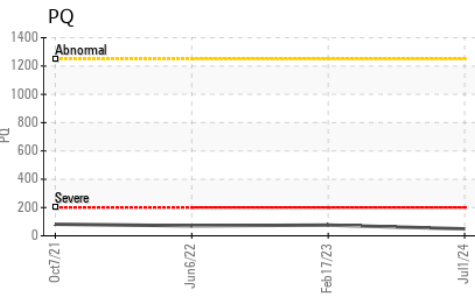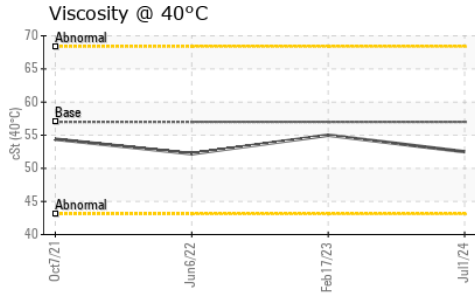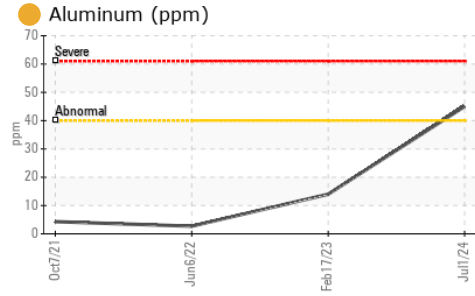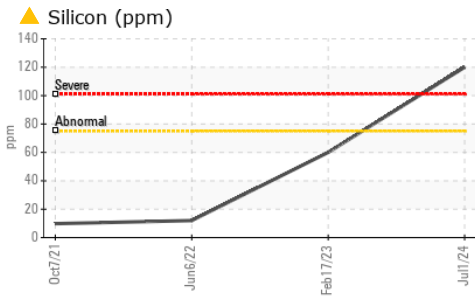

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : LEC0049797 **Received** : 05 Jul 2024  
**Lab Number** : 06228906 **Tested** : 08 Jul 2024  
**Unique Number** : 11112399 **Diagnosed** : 08 Jul 2024 - Don Baldrige  
**Test Package** : CONST ( Additional Tests: PQ )

**LESLIE EQUIPMENT COMPANY**  
 105 TENNIS CENTER DR.  
 MARIETTA, OH  
 US 45750-9765  
 Contact: LEANNE KENDALL  
 KendalLeanne@lec1.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (740)373-5570