



# OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area  
**[597440 ORLANDO CONST]**

Machine Id  
**TAKEUCHI TL10 410007826**

Component  
**Rear Right Final Drive**

Fluid  
**VOLVO PREMIUM GEAR OIL 85W-140 GL-5 (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP447394	---	---
Sample Date		Client Info		27 Jun 2024	---	---
Machine Age	hrs	Client Info		48	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Not Changed	---	---
Filter Changed		Client Info		Not Changed	---	---
Sample Status				NORMAL	---	---

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	342	---	---
Chromium	ppm	ASTM D5185m	>10	6	---	---
Nickel	ppm	ASTM D5185m	>10	<1	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>25	<1	---	---
Lead	ppm	ASTM D5185m	>25	0	---	---
Copper	ppm	ASTM D5185m	>50	1	---	---
Tin	ppm	ASTM D5185m	>10	0	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	LIGHT	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

## CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	16	---	---
Potassium	ppm	ASTM D5185m	>20	<1	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

## FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		4	---	---
Boron	ppm	ASTM D5185m	111	0	---	---
Barium	ppm	ASTM D5185m	0.0	16	---	---
Molybdenum	ppm	ASTM D5185m	0.9	<1	---	---
Manganese	ppm	ASTM D5185m	0.0	6	---	---
Magnesium	ppm	ASTM D5185m	39	0	---	---
Calcium	ppm	ASTM D5185m	93	38	---	---
Phosphorus	ppm	ASTM D5185m	920	276	---	---
Zinc	ppm	ASTM D5185m	104	42	---	---
Sulfur	ppm	ASTM D5185m	20179	22767	---	---
Visc @ 40°C	cSt	ASTM D445	333	154	---	---

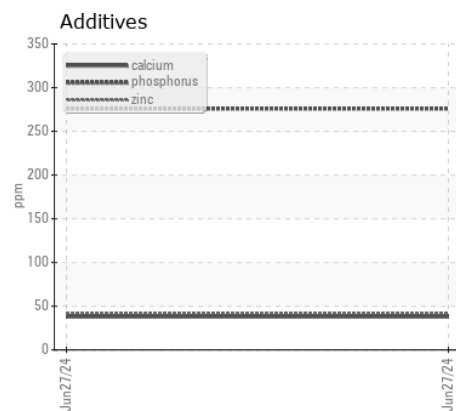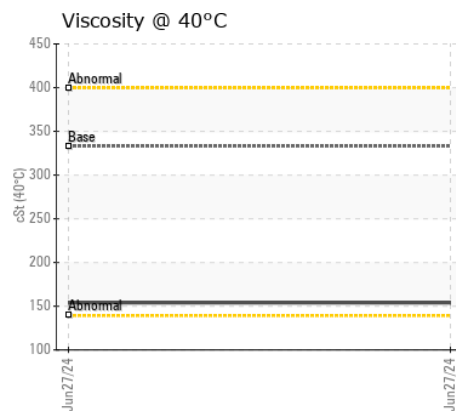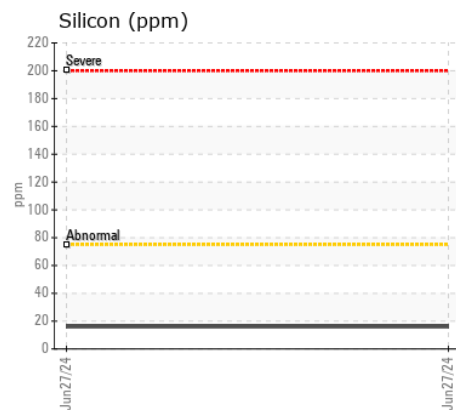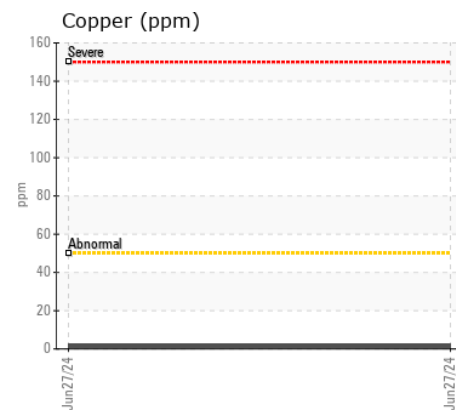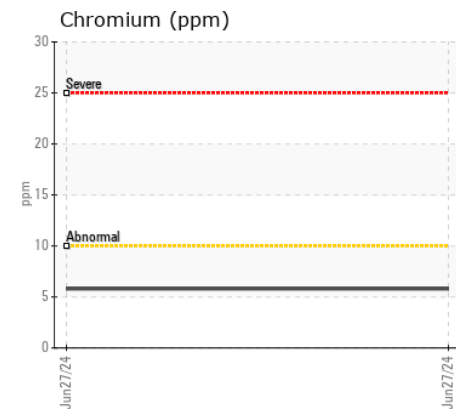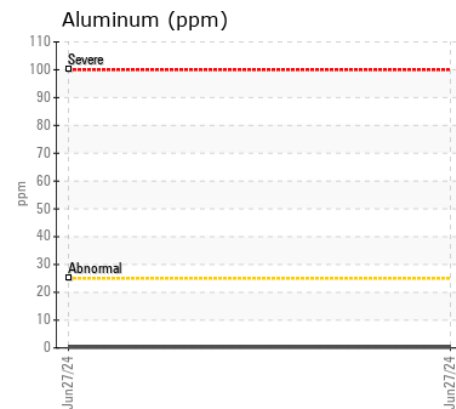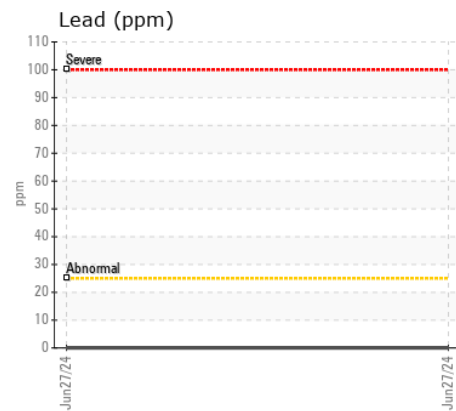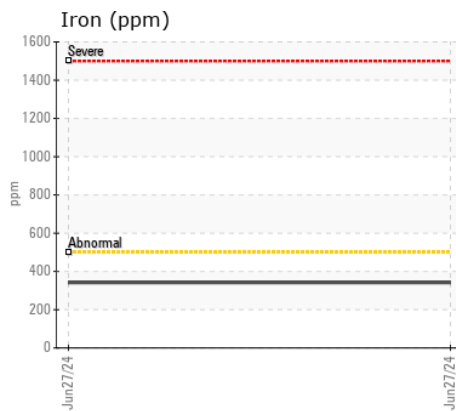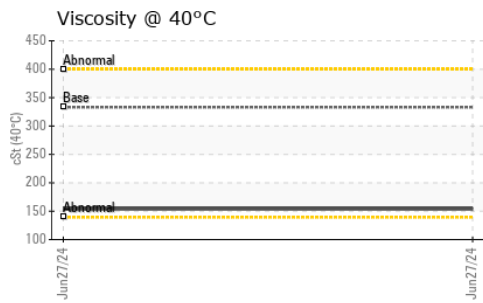

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : VCP447394  
 Lab Number : 06229001  
 Unique Number : 11112494  
 Test Package : MOB 1

Received : 05 Jul 2024  
 Tested : 08 Jul 2024  
 Diagnosed : 08 Jul 2024 - Don Baldrige

ALTA EQUIPMENT/FLAGLER EQUIPMENT LLC  
 9601 BOGGY CREEK RD  
 ORLANDO, FL  
 US 32824  
 Contact: Robert LaPlante  
 robert.laplante@altg.com  
 T: (407)508-9736  
 F: (407)659-8720

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)