



WEAR	NORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	NORMAL

Machine Id
749012-310059
 Component
Transmission (Auto)

Fluid
PETRO CANADA DuraDrive HD Synthetic 668 (32 QTS)

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0121886	GFL0092064	---
Sample Date		Client Info		03 Jul 2024	15 Feb 2024	---
Machine Age	hrs	Client Info		16254	15036	---
Oil Age	hrs	Client Info		605	0	---
Filter Age	hrs	Client Info		605	0	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				ABNORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>325	8	59	---
Chromium	ppm	ASTM D5185m	>2	0	0	---
Nickel	ppm	ASTM D5185m	>2	0	0	---
Titanium	ppm	ASTM D5185m	>3	0	0	---
Silver	ppm	ASTM D5185m	>5	0	0	---
Aluminum	ppm	ASTM D5185m	>75	6	37	---
Lead	ppm	ASTM D5185m	>40	0	1	---
Copper	ppm	ASTM D5185m	>50	2	15	---
Tin	ppm	ASTM D5185m	>10	0	2	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION





There is a moderate amount of visible silt present in the sample.

Silicon	ppm	ASTM D5185m	>20	3	7	---
Potassium	ppm	ASTM D5185m	>20	1	3	---
Water		WC Method	>0.1	NEG	NEG	---
Silt	scalar	*Visual	NONE	▲ MODER	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	---

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		2	6	---
Boron	ppm	ASTM D5185m		48	61	---
Barium	ppm	ASTM D5185m		0	<1	---
Molybdenum	ppm	ASTM D5185m		0	<1	---
Manganese	ppm	ASTM D5185m		<1	<1	---
Magnesium	ppm	ASTM D5185m		4	6	---
Calcium	ppm	ASTM D5185m		112	41	---
Phosphorus	ppm	ASTM D5185m		266	195	---
Zinc	ppm	ASTM D5185m		133	0	---
Sulfur	ppm	ASTM D5185m		1754	997	---
Visc @ 40°C	cSt	ASTM D445	34	40.3	33.0	---

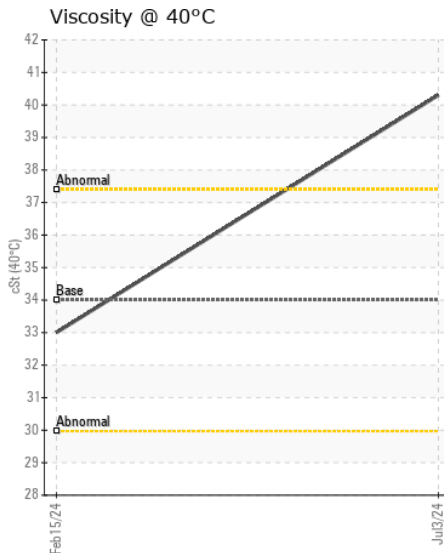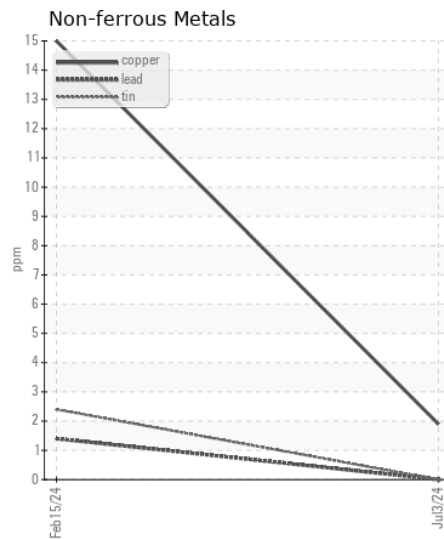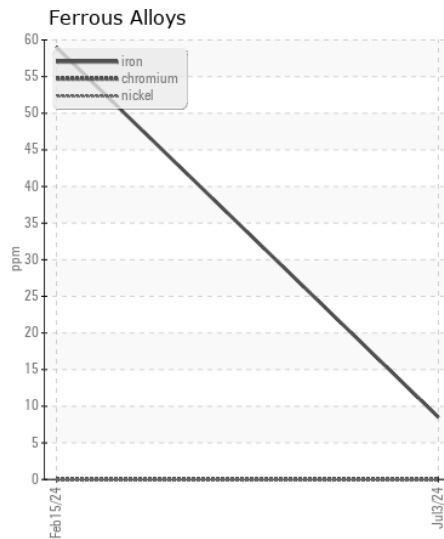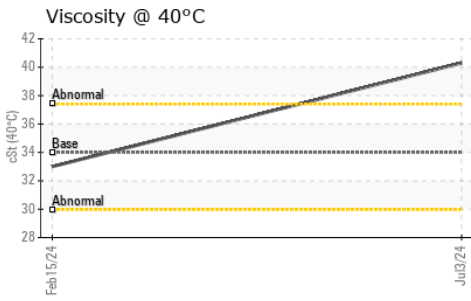

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0121886
Lab Number : 06229015
Unique Number : 11112508
Test Package : FLEET

Received : 05 Jul 2024
Tested : 08 Jul 2024
Diagnosed : 09 Jul 2024 - Sean Felton

GFL Environmental - 856 - Houston South
 8515 Highway 6 South
 Houston, TX
 US 77083
 Contact: Apolinar Zacarias
 pzacariascano@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: