



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
[W02008502]

Machine Id
VOLVO EC480E 310963

Component
Left Swing Drive

Fluid
{not provided} (2 GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample. (Customer Sample Comment: W02008502)

WEAR

All component wear rates are normal.





CONTAMINATION

There is no indication of any contamination in the oil.

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ML0002360	---	---
Sample Date		Client Info		03 Jul 2024	---	---
Machine Age	hrs	Client Info		9174	---	---
Oil Age	hrs	Client Info		9174	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---
Iron	ppm	ASTM D5185m	>1200	677	---	---
Chromium	ppm	ASTM D5185m	>10	8	---	---
Nickel	ppm	ASTM D5185m	>10	<1	---	---
Titanium	ppm	ASTM D5185m		1	---	---
Silver	ppm	ASTM D5185m		<1	---	---
Aluminum	ppm	ASTM D5185m	>25	4	---	---
Lead	ppm	ASTM D5185m	>50	<1	---	---
Copper	ppm	ASTM D5185m	>50	13	---	---
Tin	ppm	ASTM D5185m	>10	0	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Silicon	ppm	ASTM D5185m	>100	22	---	---
Potassium	ppm	ASTM D5185m	>20	3	---	---
Water		WC Method	>0.25	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.25	NEG	---	---
Sodium	ppm	ASTM D5185m		2	---	---
Boron	ppm	ASTM D5185m		113	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		7	---	---
Manganese	ppm	ASTM D5185m		7	---	---
Magnesium	ppm	ASTM D5185m		38	---	---
Calcium	ppm	ASTM D5185m		75	---	---
Phosphorus	ppm	ASTM D5185m		880	---	---
Zinc	ppm	ASTM D5185m		87	---	---
Sulfur	ppm	ASTM D5185m		25154	---	---
Visc @ 40°C	cSt	ASTM D445		257	---	---

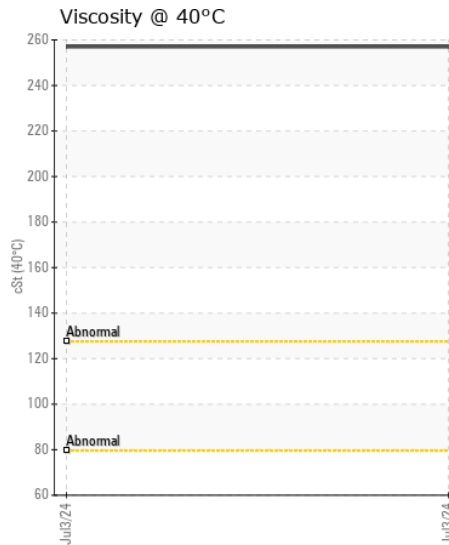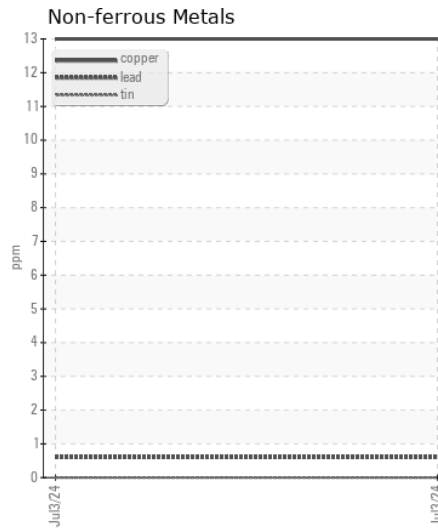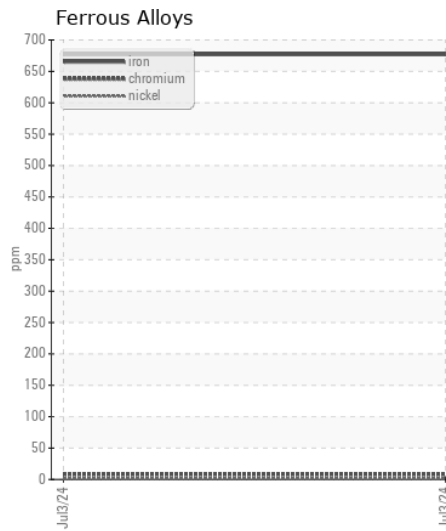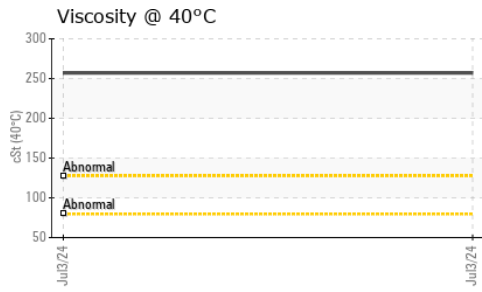

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : ML0002360

Lab Number : 06229337

Unique Number : 11112830

Test Package : CONST

Received : 05 Jul 2024

Tested : 09 Jul 2024

Diagnosed : 09 Jul 2024 - Don Baldrige

WILLIAM HAZEL

PO BOX 600

CHANTILLY, VA

US 20153

Contact: SERVICE MANAGER

jimmy_elswick@wahazel.com

T: (703)378-8300

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)