



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
FORD 650 (S/N 1FTNE24L55HA50800)
 Component
Gasoline Engine
 Fluid
PETRO CANADA SUPREME 5W20 MOTOR OIL (7 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PCA0129428	PCA0096254	---
Sample Date		Client Info		19 Jun 2024	24 Apr 2023	---
Machine Age	mls	Client Info		32781	32755	---
Oil Age	mls	Client Info		26	156	---
Filter Age	mls	Client Info		26	156	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>150	9	4	---
Chromium	ppm	ASTM D5185m	>20	0	0	---
Nickel	ppm	ASTM D5185m	>5	0	0	---
Titanium	ppm	ASTM D5185m		0	0	---
Silver	ppm	ASTM D5185m	>2	0	0	---
Aluminum	ppm	ASTM D5185m	>40	<1	<1	---
Lead	ppm	ASTM D5185m	>50	0	0	---
Copper	ppm	ASTM D5185m	>155	<1	2	---
Tin	ppm	ASTM D5185m	>10	0	0	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>30	13	12	---
Potassium	ppm	ASTM D5185m	>20	<1	<1	---
Fuel		WC Method	>4.0	<1.0	<1.0	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844		0.1	0	---
Nitration	Abs/cm	*ASTM D7624	>20	4.8	5.2	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	13.5	13.0	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>400	2	2	---
Boron	ppm	ASTM D5185m	183	188	203	---
Barium	ppm	ASTM D5185m	0	0	0	---
Molybdenum	ppm	ASTM D5185m	36	59	68	---
Manganese	ppm	ASTM D5185m	0	<1	<1	---
Magnesium	ppm	ASTM D5185m	417	473	533	---
Calcium	ppm	ASTM D5185m	1318	1302	1190	---
Phosphorus	ppm	ASTM D5185m	773	731	660	---
Zinc	ppm	ASTM D5185m	845	868	792	---
Sulfur	ppm	ASTM D5185m	2690	3335	3075	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	8.1	8.2	---
Base Number (BN)	mg KOH/g	ASTM D2896	6.5	6.5	5.9	---
Visc @ 100°C	cSt	ASTM D445	8.42	8.2	8	---

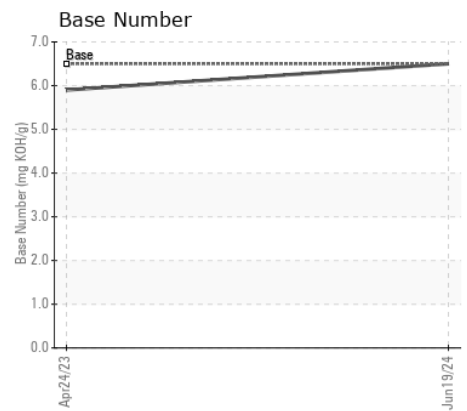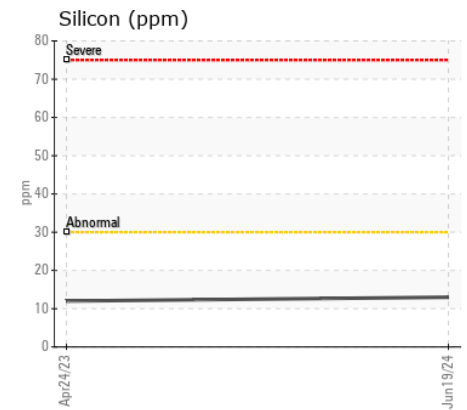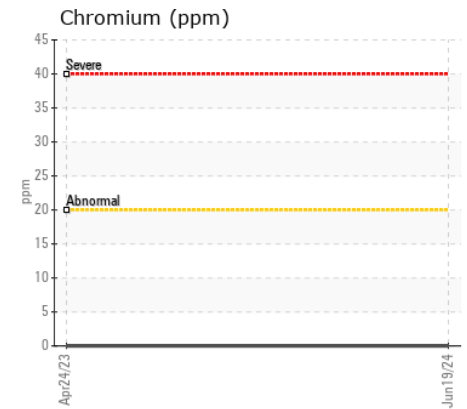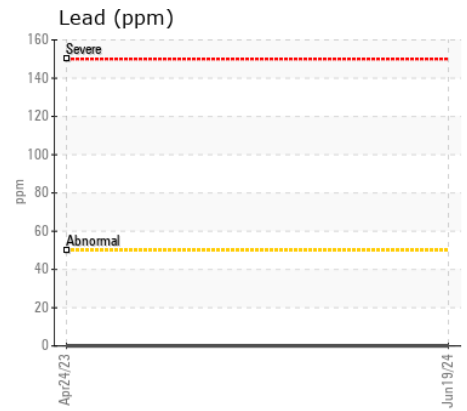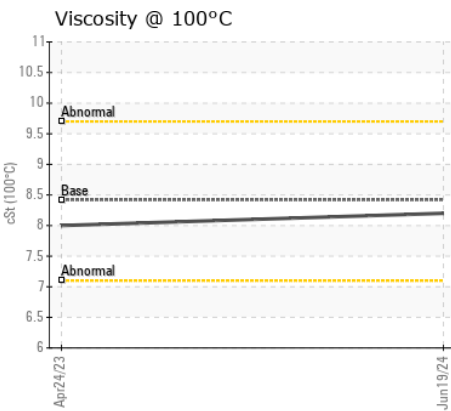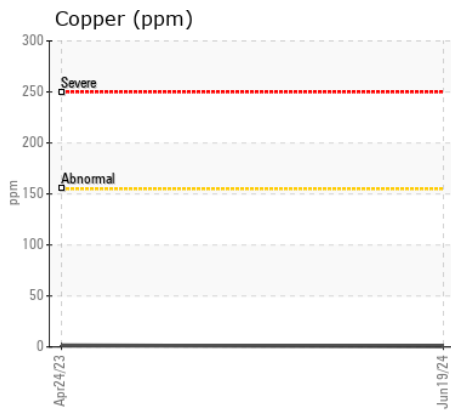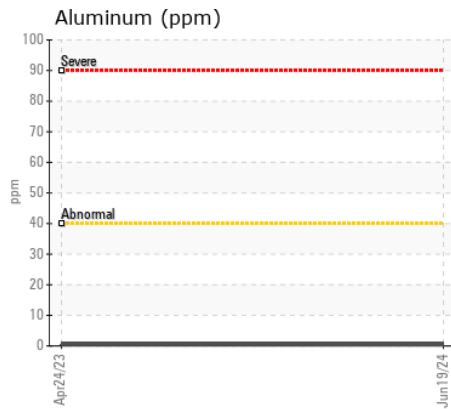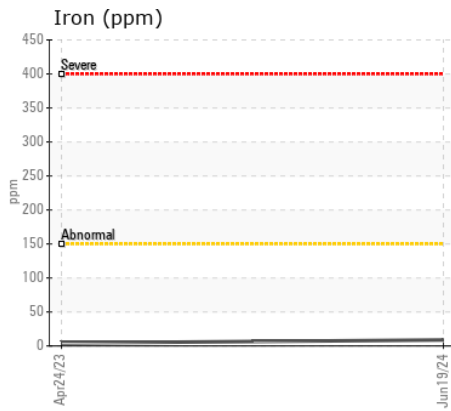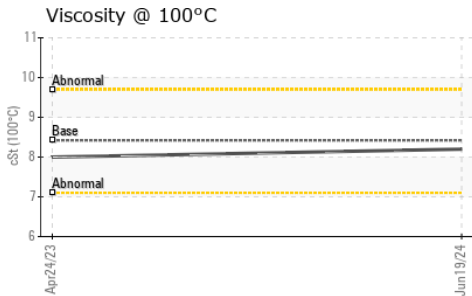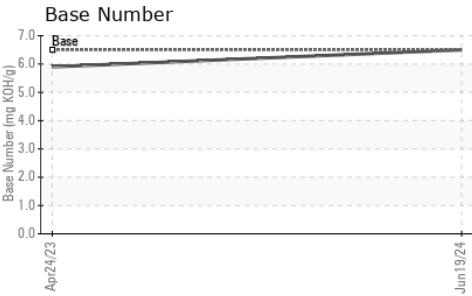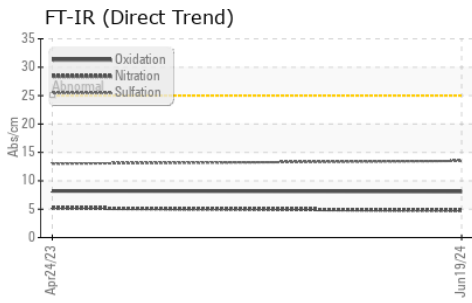

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0129428 **Received** : 05 Jul 2024
Lab Number : 06229522 **Tested** : 09 Jul 2024
Unique Number : 11113015 **Diagnosed** : 09 Jul 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: TBN)

VILLAGE OF NORTH RIVERSIDE
 2345 S DESPLAINES
 NORTH RIVERSIDE, IL
 US 60546
 Contact: Service Manager
 vznrdpw@gmail.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: