



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**QUEEN CITY**  
Component  
**Starboard Main Engine**  
Fluid  
**CHEVRON DELO 710 LS (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>MW0069894</b>	MW0062679	MW0062654
Sample Date		Client Info		<b>01 Jul 2024</b>	30 Apr 2024	01 Apr 2024
Machine Age	hrs	Client Info		<b>15502</b>	14934	14241
Oil Age	hrs	Client Info		<b>0</b>	276	14241
Filter Age	hrs	Client Info		<b>0</b>	534	1492
Oil Changed		Client Info		<b>Not Changd</b>	Not Changd	N/A
Filter Changed		Client Info		<b>Not Changd</b>	Not Changd	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>75	<b>4</b>	8	13
Chromium	ppm	ASTM D5185m	>8	<b>0</b>	0	0
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>15	<b>1</b>	2	1
Lead	ppm	ASTM D5185m	>18	<b>0</b>	<1	<1
Copper	ppm	ASTM D5185m	>80	<b>5</b>	4	8
Tin	ppm	ASTM D5185m	>14	<b>0</b>	<1	2
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>20	<b>2</b>	2	2
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	<1
Fuel		WC Method	>4.0	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844		<b>0.2</b>	0.4	0.7
Nitration	Abs/cm	*ASTM D7624	>20	<b>4.8</b>	5.3	6.2
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>13.3</b>	13.8	14.6
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>75	<b>9</b>	2	8
Boron	ppm	ASTM D5185m		<b>41</b>	38	39
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>41</b>	40	42
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Magnesium	ppm	ASTM D5185m		<b>30</b>	0	33
Calcium	ppm	ASTM D5185m		<b>3267</b>	3084	3336
Phosphorus	ppm	ASTM D5185m		<b>23</b>	0	8
Zinc	ppm	ASTM D5185m		<b>24</b>	0	5
Sulfur	ppm	ASTM D5185m		<b>2448</b>	2155	2499
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>5.6</b>	6.0	6.4
Base Number (BN)	mg KOH/g	ASTM D2896	10.5	<b>6.3</b>	5.8	6.8
Visc @ 100°C	cSt	ASTM D445	15.5	<b>14.5</b>	14.6	14.6


**FT-IR (Direct Trend)**

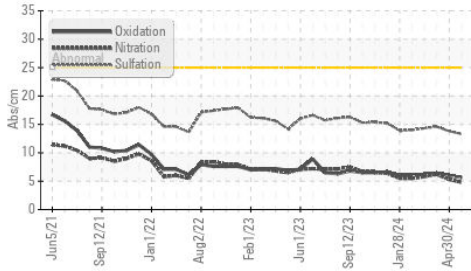


**Base Number**

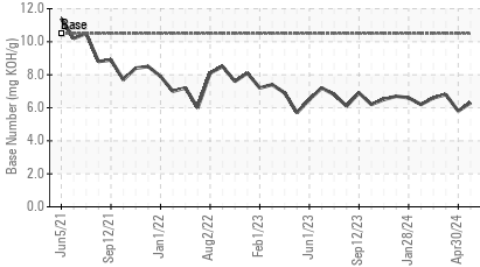


**Viscosity @ 100°C**

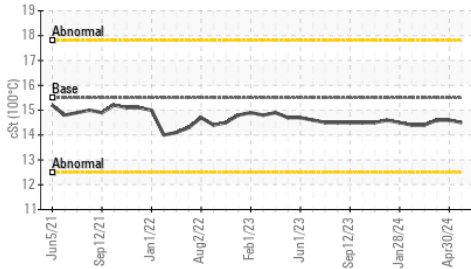


**Acid Number**

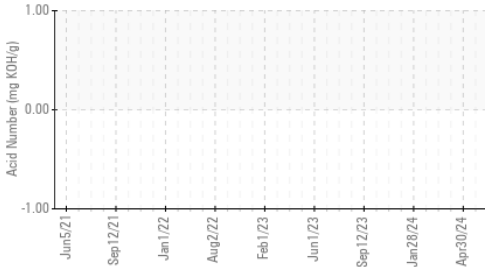


**Ferrous Alloys**

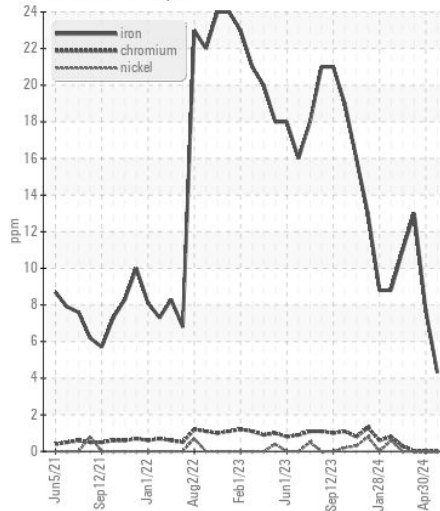


**Non-ferrous Metals**

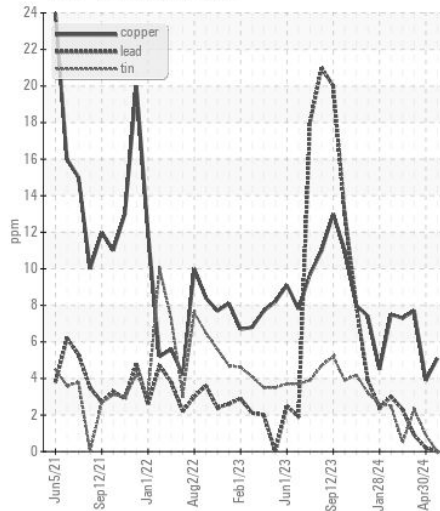

**Viscosity @ 100°C**

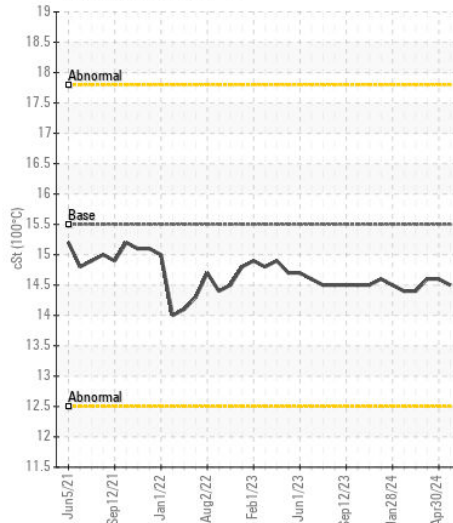

**Acid Number**

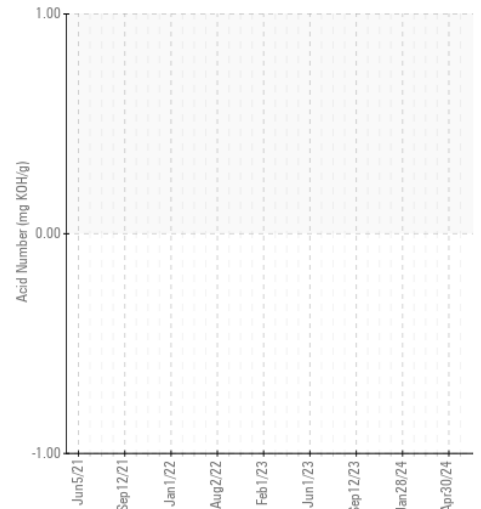

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513

**Sample No.** : MW0069894

**Lab Number** : 06229549

**Unique Number** : 11113042

**Test Package** : MAR 2 ( Additional Tests: TAN Man )

**Received** : 05 Jul 2024

**Tested** : 09 Jul 2024

**Diagnosed** : 09 Jul 2024 - Don Baldrige

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**C & B MARINE**  
50 E RIVERCENTER BLVD, SUITE 1180  
COVINGTON, KY  
US 41011

Contact: DAVID WESTRICH  
dwestrich@carlislebray.com

T: (812)290-4063

F: (859)655-7504