



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**426184**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor. ( Customer Sample Comment: New in service Truck, pm service complete, unsure of last pm and oil )

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0116217</b>	GFL0116228	GFL0116268
Sample Date		Client Info		<b>02 Jul 2024</b>	04 Jun 2024	14 Mar 2024
Machine Age	hrs	Client Info		<b>14692</b>	14672	14663
Oil Age	hrs	Client Info		<b>14692</b>	9	0
Filter Age	hrs	Client Info		<b>0</b>	9	0
Oil Changed		Client Info		<b>Changed</b>	Not Changd	Not Changd
Filter Changed		Client Info		<b>Changed</b>	Not Changd	Not Changd
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>165	<b>8</b>	8	8
Chromium	ppm	ASTM D5185m	>5	<b>&lt;1</b>	0	<1
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	>2	<b>0</b>	0	<1
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>2</b>	2	2
Lead	ppm	ASTM D5185m	>150	<b>0</b>	2	0
Copper	ppm	ASTM D5185m	>90	<b>0</b>	<1	<1
Tin	ppm	ASTM D5185m	>5	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	<1
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>35	<b>7</b>	8	6
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	2	<1
Fuel		WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>7.5	<b>0.2</b>	0.2	0.2
Nitration	Abs/cm	*ASTM D7624	>20	<b>9.4</b>	8.9	8.9
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>19.2</b>	19.1	18.7
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>2</b>	2	3
Boron	ppm	ASTM D5185m	0	<b>85</b>	105	87
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	60	<b>97</b>	101	95
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	0
Magnesium	ppm	ASTM D5185m	1010	<b>669</b>	709	651
Calcium	ppm	ASTM D5185m	1070	<b>1518</b>	1531	1371
Phosphorus	ppm	ASTM D5185m	1150	<b>818</b>	834	757
Zinc	ppm	ASTM D5185m	1270	<b>953</b>	992	891
Sulfur	ppm	ASTM D5185m	2060	<b>3519</b>	3656	3456
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>17.0</b>	16.6	16.5
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>7.3</b>	7.5	8.1
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.6</b>	13.5	13.3

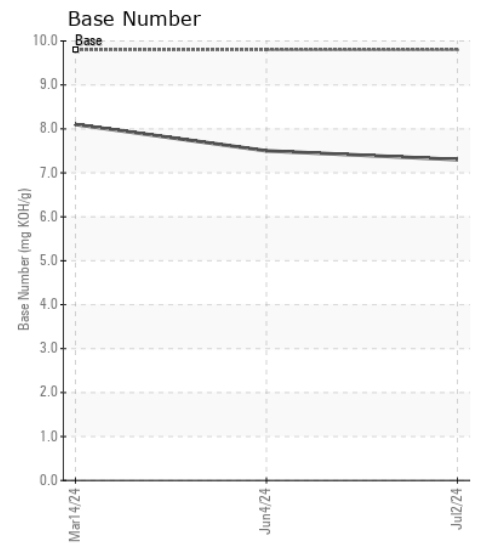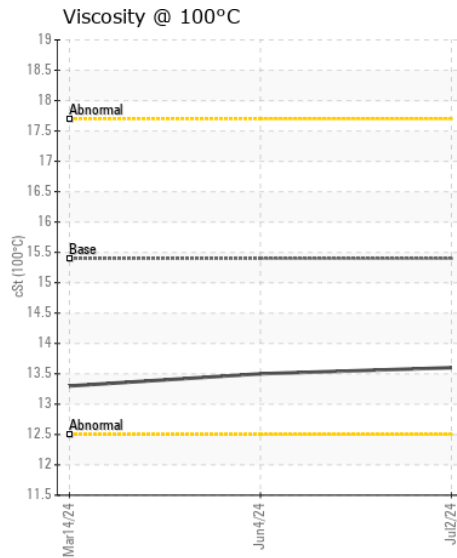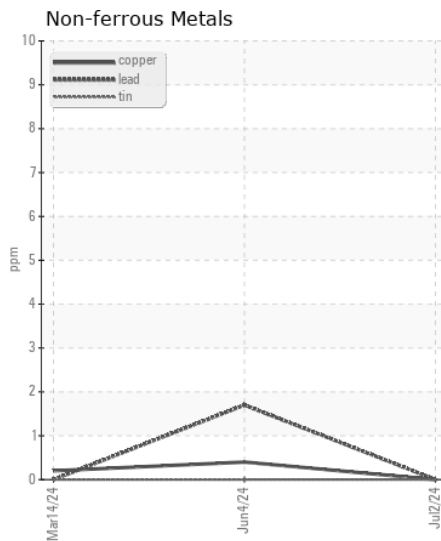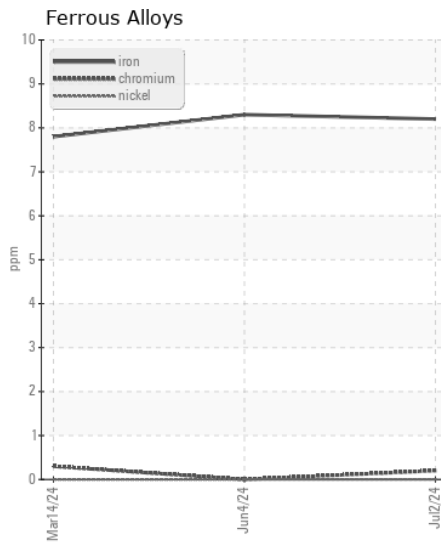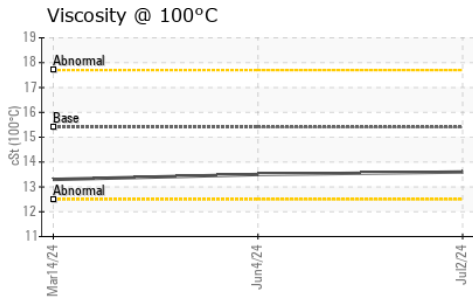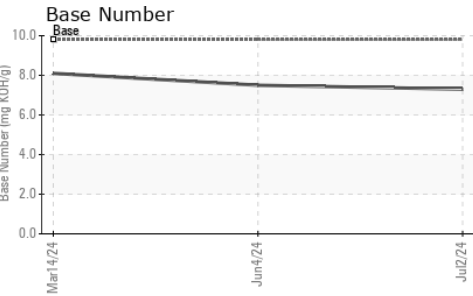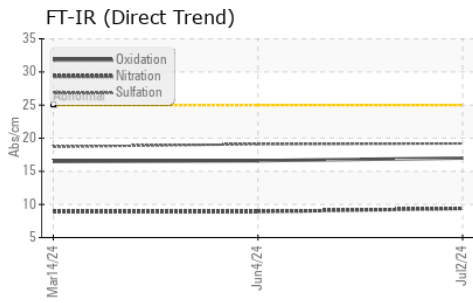

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0116217  
**Lab Number** : 06229550  
**Unique Number** : 11113043  
**Test Package** : FLEET

**Received** : 05 Jul 2024  
**Tested** : 09 Jul 2024  
**Diagnosed** : 09 Jul 2024 - Don Baldrige

**GFL Environmental - 625 - Harrison Hauling**  
 2480 S Clare Ave  
 Clare, MI  
 US 48617

Contact: Glenda Standen  
 gstanden@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: