



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
(BB27195)
Machine Id
528008-1107
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. (Customer Sample Comment: Pm services complete)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0116301	GFL0116215	GFL0094876
Sample Date		Client Info		02 Jul 2024	21 May 2024	04 Jan 2024
Machine Age	hrs	Client Info		15739	15625	14900
Oil Age	hrs	Client Info		841	727	14420
Filter Age	hrs	Client Info		841	727	14420
Oil Changed		Client Info		Changed	Not Changd	Changed
Filter Changed		Client Info		Changed	Not Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	57	49	76
Chromium	ppm	ASTM D5185m	>20	2	1	2
Nickel	ppm	ASTM D5185m	>4	0	0	<1
Titanium	ppm	ASTM D5185m		0	0	<1
Silver	ppm	ASTM D5185m	>3	0	0	<1
Aluminum	ppm	ASTM D5185m	>20	5	5	15
Lead	ppm	ASTM D5185m	>40	3	2	5
Copper	ppm	ASTM D5185m	>330	4	<1	1
Tin	ppm	ASTM D5185m	>15	0	<1	1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	8	7	11
Potassium	ppm	ASTM D5185m	>20	5	4	24
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	1	0.8	1
Nitration	Abs/cm	*ASTM D7624	>20	12.4	11.6	11.5
Sulfation	Abs/.1mm	*ASTM D7415	>30	25.7	23.8	24.6
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		6	5	7
Boron	ppm	ASTM D5185m	0	8	5	4
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	60	64	66	66
Manganese	ppm	ASTM D5185m	0	1	<1	1
Magnesium	ppm	ASTM D5185m	1010	1002	992	1016
Calcium	ppm	ASTM D5185m	1070	1222	1150	1157
Phosphorus	ppm	ASTM D5185m	1150	1098	1123	1175
Zinc	ppm	ASTM D5185m	1270	1346	1332	1399
Sulfur	ppm	ASTM D5185m	2060	3122	3138	2911
Oxidation	Abs/.1mm	*ASTM D7414	>25	22.7	21.2	20.6
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	4.9	4.9	5.4
Visc @ 100°C	cSt	ASTM D445	15.4	13.6	13.4	13.3

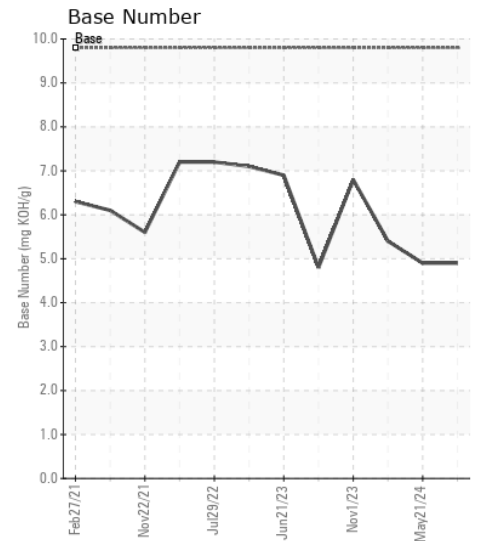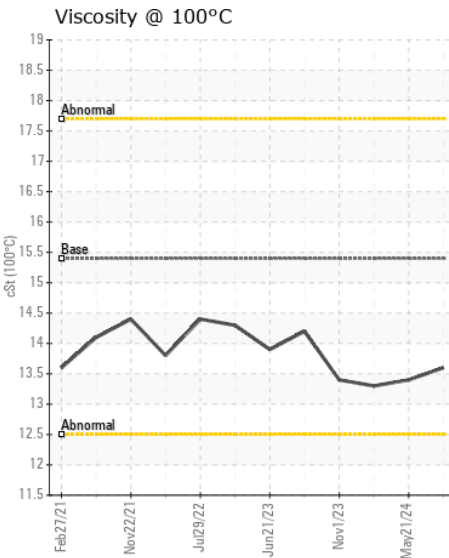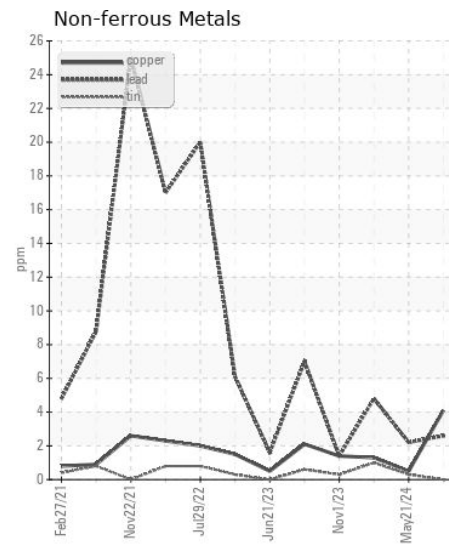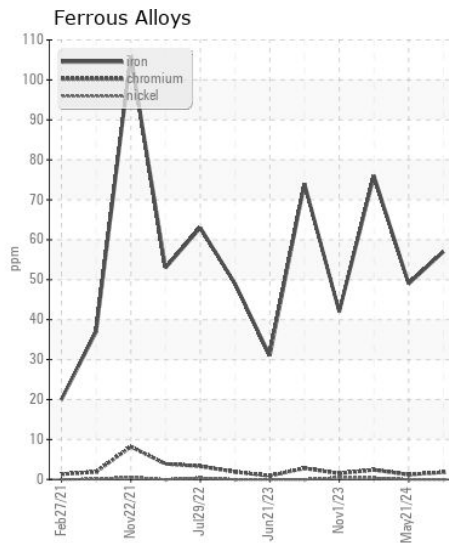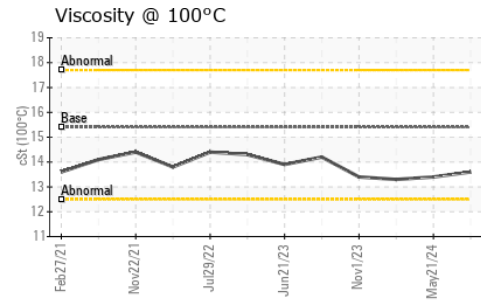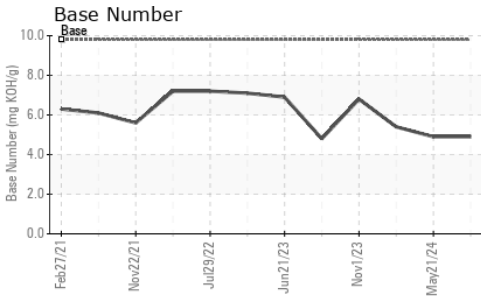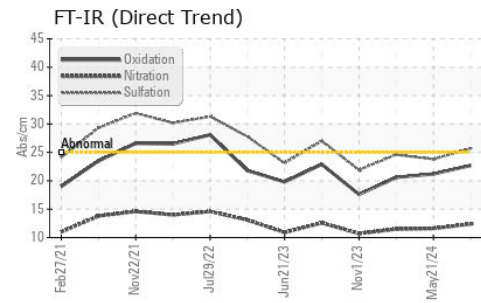

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0116301
Lab Number : 06229598
Unique Number : 11113091
Test Package : FLEET

GFL Environmental - 625 - Harrison Hauling
 2480 S Clare Ave
 Clare, MI
 US 48617
 Contact: Glenda Standen
 gstanden@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: