



OIL ANALYSIS REPORT

| | |
|-----------------|--------|
| WEAR | NORMAL |
| CONTAMINATION | NORMAL |
| FLUID CONDITION | NORMAL |

Machine Id
LOADER
 Component
Diesel Engine
 Fluid
CHEVRON 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|----------------|-----|-------------|-----------|--------------------|----------|----------|
| Sample Number | | Client Info | | WE0007543 | --- | --- |
| Sample Date | | Client Info | | 22 Jun 2024 | --- | --- |
| Machine Age | hrs | Client Info | | 500 | --- | --- |
| Oil Age | hrs | Client Info | | 500 | --- | --- |
| Filter Age | hrs | Client Info | | 500 | --- | --- |
| Oil Changed | | Client Info | | Changed | --- | --- |
| Filter Changed | | Client Info | | Changed | --- | --- |
| Sample Status | | | | NORMAL | --- | --- |

WEAR

Metal levels are typical for a components first oil change.

| | | | | | | |
|--------------|--------|-------------|------|--------------|-----|-----|
| Iron | ppm | ASTM D5185m | >100 | 48 | --- | --- |
| Chromium | ppm | ASTM D5185m | >20 | 2 | --- | --- |
| Nickel | ppm | ASTM D5185m | >4 | 2 | --- | --- |
| Titanium | ppm | ASTM D5185m | | 1 | --- | --- |
| Silver | ppm | ASTM D5185m | >3 | <1 | --- | --- |
| Aluminum | ppm | ASTM D5185m | >20 | 6 | --- | --- |
| Lead | ppm | ASTM D5185m | >40 | 2 | --- | --- |
| Copper | ppm | ASTM D5185m | >330 | 4 | --- | --- |
| Tin | ppm | ASTM D5185m | >15 | 1 | --- | --- |
| Vanadium | ppm | ASTM D5185m | | <1 | --- | --- |
| White Metal | scalar | *Visual | NONE | NONE | --- | --- |
| Yellow Metal | scalar | *Visual | NONE | NONE | --- | --- |

CONTAMINATION








There is no indication of any contamination in the oil.

| | | | | | | |
|------------------|----------|-------------|-------|----------------|-----|-----|
| Silicon | ppm | ASTM D5185m | >25 | 12 | --- | --- |
| Potassium | ppm | ASTM D5185m | >20 | 4 | --- | --- |
| Fuel | | WC Method | >5 | <1.0 | --- | --- |
| Water | | WC Method | >0.2 | NEG | --- | --- |
| Glycol | | WC Method | | NEG | --- | --- |
| Soot % | % | *ASTM D7844 | >3 | 1 | --- | --- |
| Nitration | Abs/cm | *ASTM D7624 | >20 | 10.6 | --- | --- |
| Sulfation | Abs/.1mm | *ASTM D7415 | >30 | 26.0 | --- | --- |
| Silt | scalar | *Visual | NONE | NONE | --- | --- |
| Debris | scalar | *Visual | NONE | NONE | --- | --- |
| Sand/Dirt | scalar | *Visual | NONE | NONE | --- | --- |
| Appearance | scalar | *Visual | NORML | NORML | --- | --- |
| Odor | scalar | *Visual | NORML | NORML | --- | --- |
| Emulsified Water | scalar | *Visual | >0.2 | NEG | --- | --- |

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

| | | | | | | |
|------------------|----------|-------------|------|-------------|-----|-----|
| Sodium | ppm | ASTM D5185m | >50 | 5 | --- | --- |
| Boron | ppm | ASTM D5185m | | 66 | --- | --- |
| Barium | ppm | ASTM D5185m | | 0 | --- | --- |
| Molybdenum | ppm | ASTM D5185m | | 94 | --- | --- |
| Manganese | ppm | ASTM D5185m | | 1 | --- | --- |
| Magnesium | ppm | ASTM D5185m | | 421 | --- | --- |
| Calcium | ppm | ASTM D5185m | | 1532 | --- | --- |
| Phosphorus | ppm | ASTM D5185m | | 1117 | --- | --- |
| Zinc | ppm | ASTM D5185m | | 1422 | --- | --- |
| Sulfur | ppm | ASTM D5185m | | 3253 | --- | --- |
| Oxidation | Abs/.1mm | *ASTM D7414 | >25 | 20.8 | --- | --- |
| Base Number (BN) | mg KOH/g | ASTM D2896 | | 6.0 | --- | --- |
| Visc @ 100°C | cSt | ASTM D445 | 14.4 | 13.0 | --- | --- |

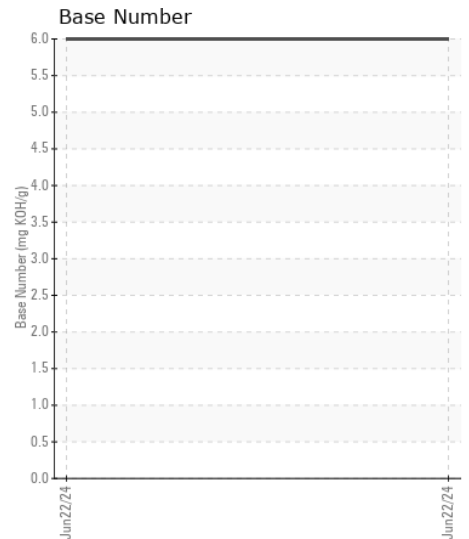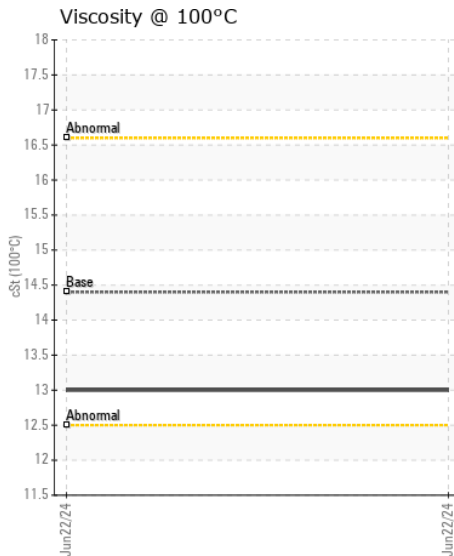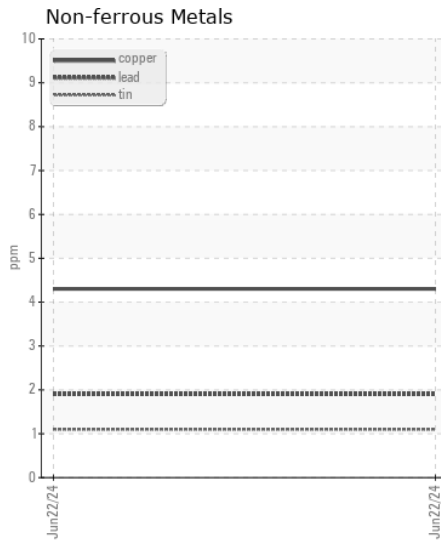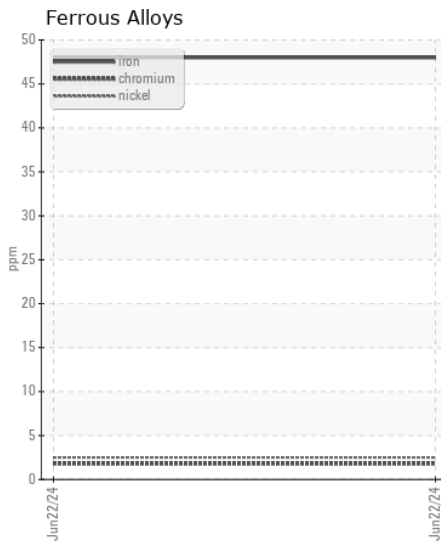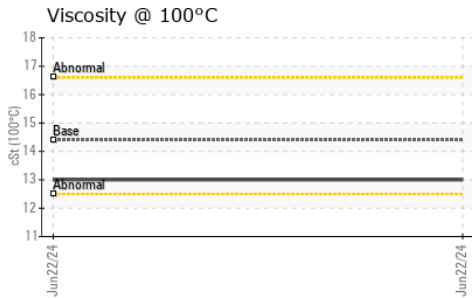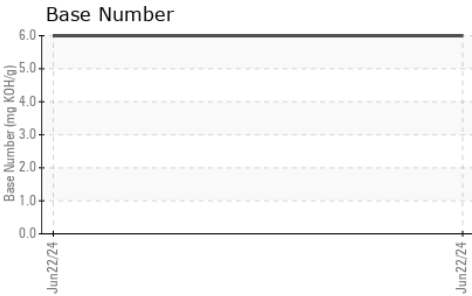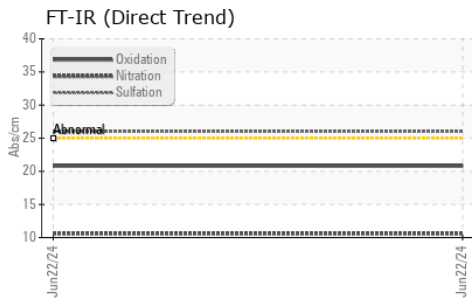

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : WE0007543

Lab Number : 06229685

Unique Number : 11113178

Test Package : CONST (Additional Tests: TBN)

Received : 08 Jul 2024

Tested : 09 Jul 2024

Diagnosed : 09 Jul 2024 - Wes Davis

WARRIOR TRACTOR AND EQUIPMENT - MONROEVILLE

66 INDUSTRIAL PARK DR

MONROEVILLE, AL

US 36460

Contact: SCOTT WILLIAMSON

swilliamson@warriortractor.com

T: (251)575-7111

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)