



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**JOHN DEERE 408**  
 Component  
**Diesel Engine**  
 Fluid  
**MOBIL 15W40 (--- QTS)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0189751</b>	JR0189886	JR0135342
Sample Date		Client Info		<b>07 Jun 2024</b>	21 Mar 2024	18 Dec 2023
Machine Age	hrs	Client Info		<b>7500</b>	7005	6502
Oil Age	hrs	Client Info		<b>500</b>	500	502
Filter Age	hrs	Client Info		<b>500</b>	500	502
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>51	<b>22</b>	20	16
Chromium	ppm	ASTM D5185m	>11	<b>1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>5	<b>1</b>	0	<1
Titanium	ppm	ASTM D5185m		<b>1</b>	0	0
Silver	ppm	ASTM D5185m	>3	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m	>31	<b>4</b>	2	2
Lead	ppm	ASTM D5185m	>26	<b>&lt;1</b>	0	0
Copper	ppm	ASTM D5185m	>26	<b>4</b>	4	<1
Tin	ppm	ASTM D5185m	>4	<b>&lt;1</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>22	<b>7</b>	6	4
Potassium	ppm	ASTM D5185m	>20	<b>4</b>	<1	1
Fuel		WC Method	>2.1	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.21	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.2</b>	0.2	0.2
Nitration	Abs/cm	*ASTM D7624	>20	<b>6.3</b>	6.1	6.3
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>22.3</b>	22.0	21.4
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.21	<b>NEG</b>	NEG	NEG

### FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>118	<b>4</b>	2	3
Boron	ppm	ASTM D5185m		<b>41</b>	46	25
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>48</b>	44	39
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Magnesium	ppm	ASTM D5185m		<b>556</b>	544	567
Calcium	ppm	ASTM D5185m		<b>1797</b>	1773	1535
Phosphorus	ppm	ASTM D5185m		<b>975</b>	965	936
Zinc	ppm	ASTM D5185m		<b>1224</b>	1162	1084
Sulfur	ppm	ASTM D5185m		<b>3124</b>	3309	2878
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>20.1</b>	19.8	18.9
Base Number (BN)	mg KOH/g	ASTM D2896		<b>10.4</b>	10.7	10.5
Visc @ 100°C	cSt	ASTM D445		<b>12.9</b>	12.9	12.7


**FT-IR (Direct Trend)**

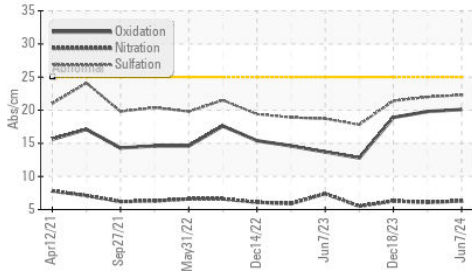


**Ferrous Alloys**

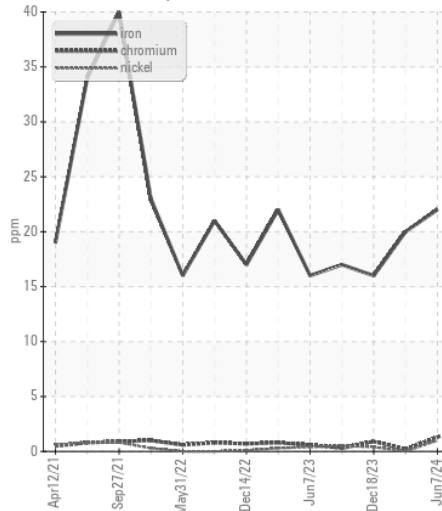


**Base Number**

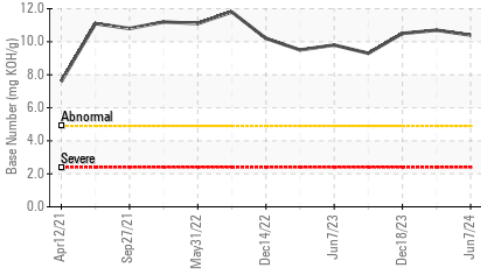


**Non-ferrous Metals**

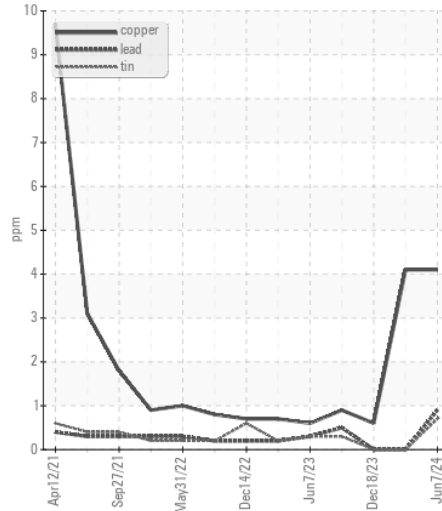


**Viscosity @ 100°C**

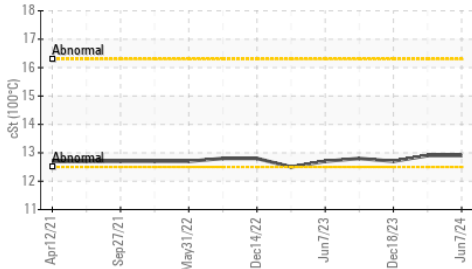

**Viscosity @ 100°C**

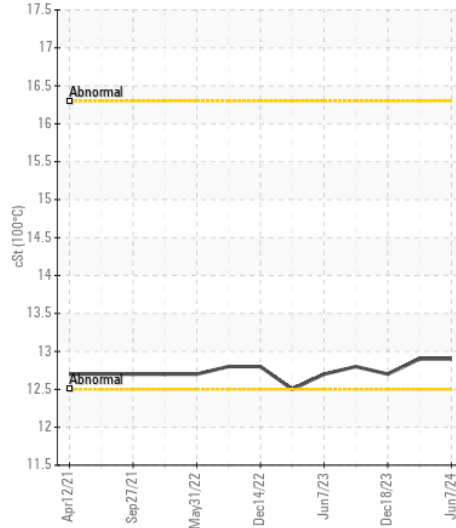

**Base Number**

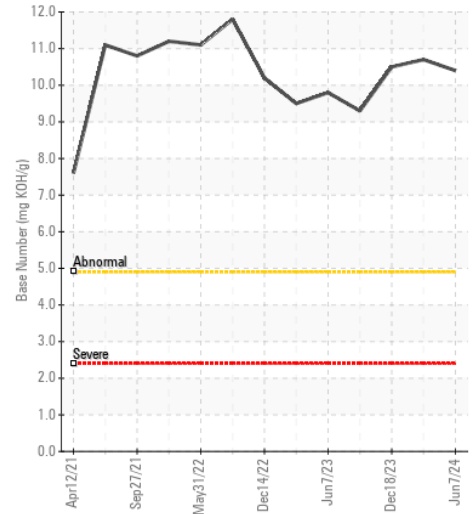

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0189751 **Received** : 08 Jul 2024  
**Lab Number** : 06229689 **Tested** : 09 Jul 2024  
**Unique Number** : 11113182 **Diagnosed** : 09 Jul 2024 - Wes Davis  
**Test Package** : CONST ( Additional Tests: TBN )

**THE SCOTTS COMPANY**  
 3175 BRIGHT LEAF RD  
 LAWRENCEVILLE, VA  
 US 23868  
 Contact: DAVID WALTON  
 david.walton@scotts.com  
 T: (434)637-6114  
 F: (434)848-2250

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)