



WEAR	ABNORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
HAMM ROL-8
Component
Diesel Engine
Fluid
DIESEL ENGINE OIL SAE 40 (--- GAL)

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		CL0005548	CL0005112	---
Sample Date		Client Info		28 Jun 2024	31 Jan 2024	---
Machine Age	hrs	Client Info		2433	2081	---
Oil Age	hrs	Client Info		352	2081	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				ABNORMAL	NORMAL	---

WEAR

Cylinder, crank, or cam shaft wear is indicated.

Iron	ppm	ASTM D5185m	>100	▲ 162	102	---
Chromium	ppm	ASTM D5185m	>20	2	<1	---
Nickel	ppm	ASTM D5185m	>4	1	<1	---
Titanium	ppm	ASTM D5185m		1	<1	---
Silver	ppm	ASTM D5185m	>3	<1	0	---
Aluminum	ppm	ASTM D5185m	>20	16	10	---
Lead	ppm	ASTM D5185m	>40	6	3	---
Copper	ppm	ASTM D5185m	>330	5	2	---
Tin	ppm	ASTM D5185m	>15	1	1	---
Vanadium	ppm	ASTM D5185m		<1	<1	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION









There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	17	14	---
Potassium	ppm	ASTM D5185m	>20	4	4	---
Fuel		WC Method	>5	<1.0	<1.0	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	0.8	0.3	---
Nitration	Abs/cm	*ASTM D7624	>20	12.0	9.4	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	24.3	21.5	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>216	4	<1	---
Boron	ppm	ASTM D5185m	250	31	178	---
Barium	ppm	ASTM D5185m	10	0	0	---
Molybdenum	ppm	ASTM D5185m	100	132	197	---
Manganese	ppm	ASTM D5185m		2	<1	---
Magnesium	ppm	ASTM D5185m	450	194	787	---
Calcium	ppm	ASTM D5185m	3000	2571	1491	---
Phosphorus	ppm	ASTM D5185m	1150	1212	971	---
Zinc	ppm	ASTM D5185m	1350	1507	1109	---
Sulfur	ppm	ASTM D5185m	4250	3945	2829	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	20.7	17.4	---
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	6.9	8.7	---
Visc @ 100°C	cSt	ASTM D445	14.4	14.7	13.6	---

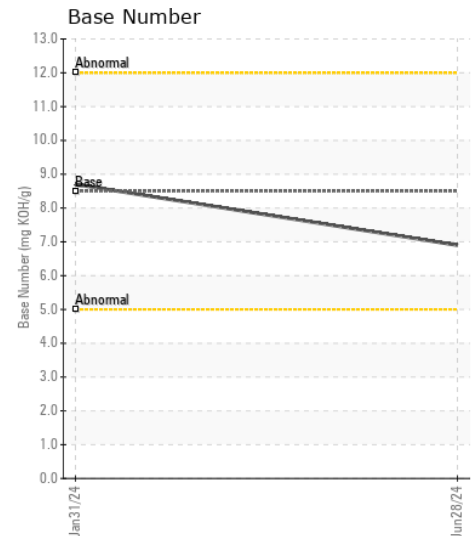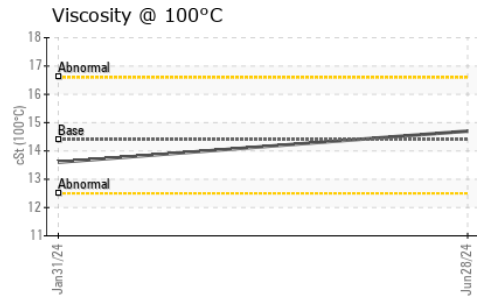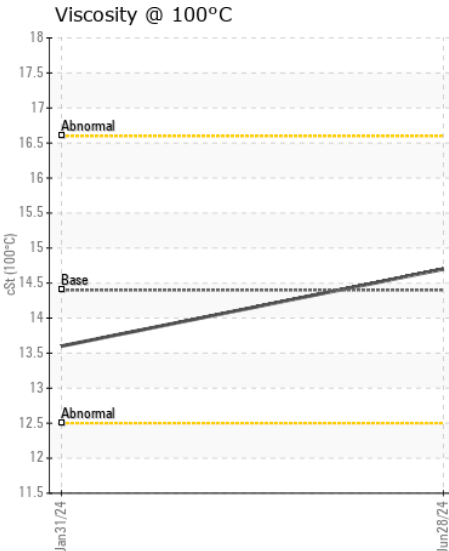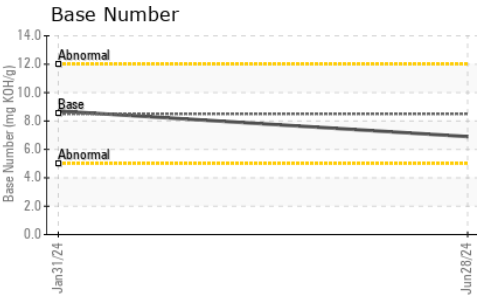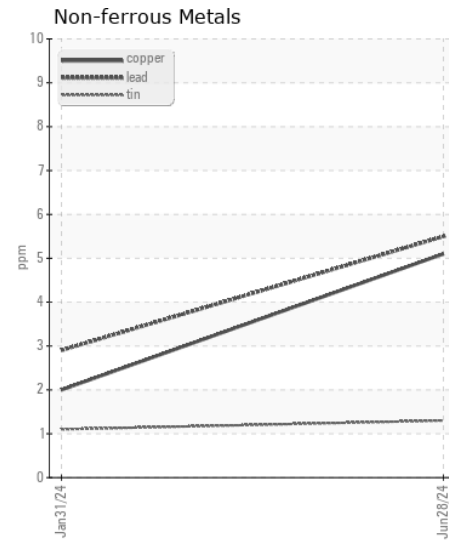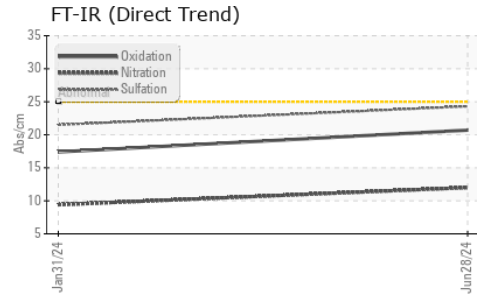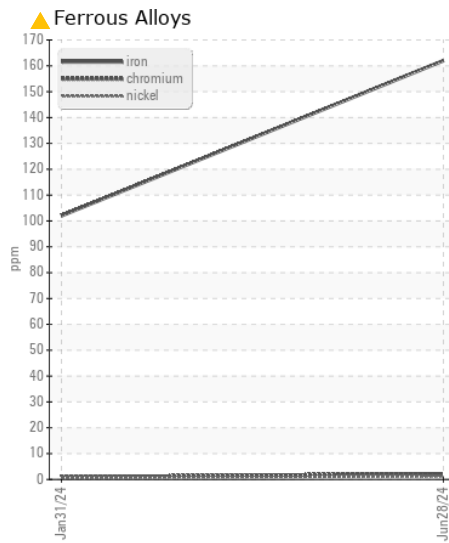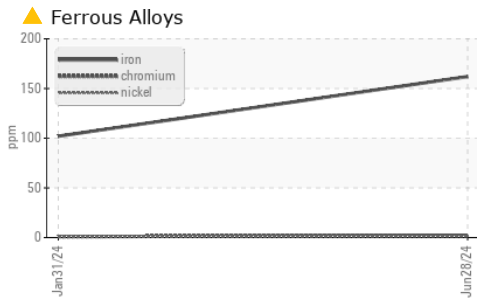

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : CL0005548 **Received** : 08 Jul 2024
Lab Number : 06229729 **Tested** : 09 Jul 2024
Unique Number : 11113222 **Diagnosed** : 09 Jul 2024 - Sean Felton
Test Package : CONST (Additional Tests: TBN)

BULLSEYE CONSTRUCTION
 581 N POLK ST
 PINEVILLE, NC
 US 28134
 Contact: SERVICE MANAGER

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: