



OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**KOMATSU PC-300 TH-28 (S/N A86859)**  
Component  
**Diesel Engine**  
Fluid  
**DIESEL ENGINE OIL SAE 15W40 (10 GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>CL0005602</b>	CL0005308	CL0004870
Sample Date		Client Info		<b>30 Jun 2024</b>	31 Mar 2024	25 Oct 2023
Machine Age	hrs	Client Info		<b>995</b>	708	145
Oil Age	hrs	Client Info		<b>0</b>	0	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185m	>100	<b>20</b>	32	8
Chromium	ppm	ASTM D5185m	>20	<b>1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>4	<b>&lt;1</b>	0	<1
Titanium	ppm	ASTM D5185m		<b>1</b>	0	0
Silver	ppm	ASTM D5185m	>3	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>4</b>	3	3
Lead	ppm	ASTM D5185m	>40	<b>2</b>	3	1
Copper	ppm	ASTM D5185m	>330	<b>4</b>	2	<1
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>25	<b>5</b>	5	4
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	0	2
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.8</b>	1.3	0.7
Nitration	Abs/cm	*ASTM D7624	>20	<b>9.4</b>	10.9	8.7
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>19.7</b>	22.0	18.8
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>158	<b>3</b>	1	1
Boron	ppm	ASTM D5185m	250	<b>50</b>	46	55
Barium	ppm	ASTM D5185m	10	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	100	<b>96</b>	98	83
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Magnesium	ppm	ASTM D5185m	450	<b>20</b>	17	17
Calcium	ppm	ASTM D5185m	3000	<b>2441</b>	2417	2092
Phosphorus	ppm	ASTM D5185m	1150	<b>1092</b>	1029	1012
Zinc	ppm	ASTM D5185m	1350	<b>1369</b>	1255	1184
Sulfur	ppm	ASTM D5185m	4250	<b>3954</b>	3851	3505
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>14.1</b>	17.3	13.5
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	<b>6.7</b>	6.4	7.2
Visc @ 100°C	cSt	ASTM D445	14.4	<b>14.3</b>	14.3	14.1


FT-IR (Direct Trend)

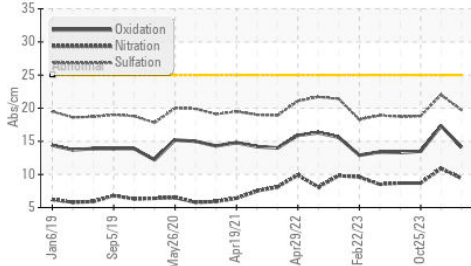


Base Number

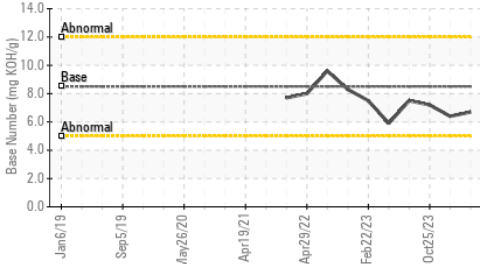


Viscosity @ 100°C

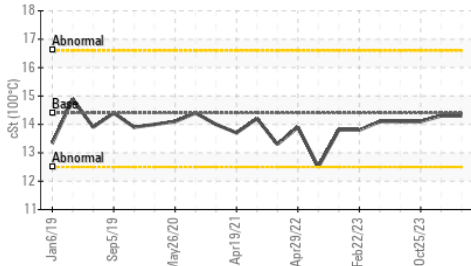


Ferrous Alloys

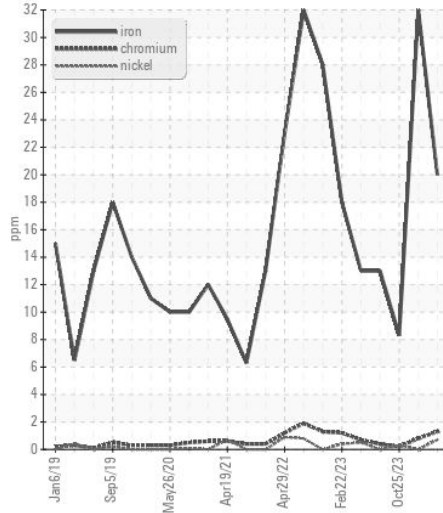


Non-ferrous Metals

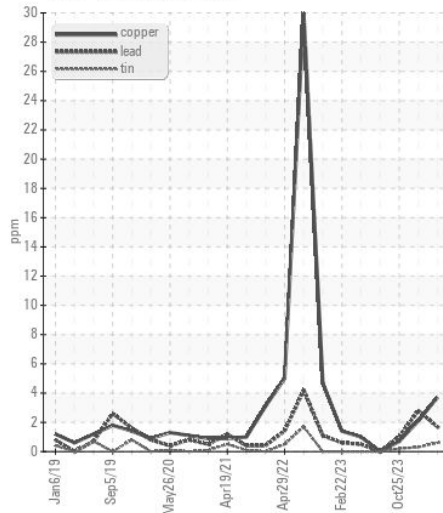

Viscosity @ 100°C

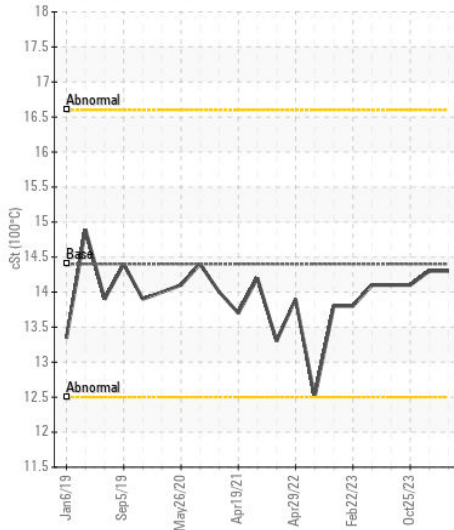

Base Number

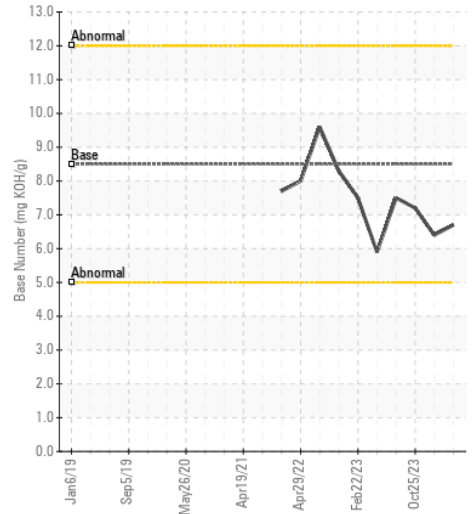

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : CL0005602 **Received** : 08 Jul 2024  
**Lab Number** : 06229736 **Tested** : 09 Jul 2024  
**Unique Number** : 11113229 **Diagnosed** : 09 Jul 2024 - Wes Davis  
**Test Package** : CONST ( Additional Tests: TBN )

**PEDULLA**  
 146 MCLELLAND  
 MOORESVILLE, NC  
 US 28115  
 Contact: LARRY

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: