



OIL ANALYSIS REPORT

|                 |               |
|-----------------|---------------|
| WEAR            | <b>NORMAL</b> |
| CONTAMINATION   | <b>NORMAL</b> |
| FLUID CONDITION | <b>NORMAL</b> |

Machine Id  
**JOHN DEERE 135G 4008**  
Component  
**Diesel Engine**  
Fluid  
**DIESEL ENGINE OIL SAE 40 (4 GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

| Test           | UOM | Method      | Limit/Abn | Current            | History1    | History2    |
|----------------|-----|-------------|-----------|--------------------|-------------|-------------|
| Sample Number  |     | Client Info |           | <b>CL0005589</b>   | CL0004977   | CL0004500   |
| Sample Date    |     | Client Info |           | <b>25 Jun 2024</b> | 08 Dec 2023 | 20 Jul 2023 |
| Machine Age    | hrs | Client Info |           | <b>1092</b>        | 810         | 525         |
| Oil Age        | hrs | Client Info |           | <b>282</b>         | 0           | 0           |
| Filter Age     | hrs | Client Info |           | <b>0</b>           | 0           | 0           |
| Oil Changed    |     | Client Info |           | <b>Changed</b>     | Changed     | Changed     |
| Filter Changed |     | Client Info |           | <b>Changed</b>     | Changed     | Changed     |
| Sample Status  |     |             |           | <b>NORMAL</b>      | NORMAL      | NORMAL      |

**WEAR**

Metal levels are typical for a new component breaking in.

|              |        |             |      |              |      |      |
|--------------|--------|-------------|------|--------------|------|------|
| Iron         | ppm    | ASTM D5185m | >51  | <b>3</b>     | 1    | 4    |
| Chromium     | ppm    | ASTM D5185m | >11  | <b>&lt;1</b> | 0    | <1   |
| Nickel       | ppm    | ASTM D5185m | >5   | <b>&lt;1</b> | 0    | 0    |
| Titanium     | ppm    | ASTM D5185m |      | <b>1</b>     | 0    | 0    |
| Silver       | ppm    | ASTM D5185m | >3   | <b>&lt;1</b> | 0    | 0    |
| Aluminum     | ppm    | ASTM D5185m | >31  | <b>4</b>     | 3    | 3    |
| Lead         | ppm    | ASTM D5185m | >26  | <b>&lt;1</b> | 0    | 0    |
| Copper       | ppm    | ASTM D5185m | >26  | <b>3</b>     | 2    | 3    |
| Tin          | ppm    | ASTM D5185m | >4   | <b>&lt;1</b> | <1   | 0    |
| Vanadium     | ppm    | ASTM D5185m |      | <b>&lt;1</b> | 0    | 0    |
| White Metal  | scalar | *Visual     | NONE | <b>NONE</b>  | NONE | NONE |
| Yellow Metal | scalar | *Visual     | NONE | <b>NONE</b>  | NONE | NONE |

**CONTAMINATION**

There is no indication of any contamination in the oil.


|                  |          |             |       |                |       |       |
|------------------|----------|-------------|-------|----------------|-------|-------|
| Silicon          | ppm      | ASTM D5185m | >22   | <b>5</b>       | 5     | 8     |
| Potassium        | ppm      | ASTM D5185m | >20   | <b>3</b>       | 2     | 0     |
| Fuel             |          | WC Method   | >2.1  | <b>&lt;1.0</b> | <1.0  | <1.0  |
| Water            |          | WC Method   | >0.21 | <b>NEG</b>     | NEG   | NEG   |
| Glycol           |          | WC Method   |       | <b>NEG</b>     | NEG   | NEG   |
| Soot %           | %        | *ASTM D7844 | >3    | <b>0.1</b>     | 0.1   | 0.1   |
| Nitration        | Abs/cm   | *ASTM D7624 | >20   | <b>8.1</b>     | 7.7   | 7.7   |
| Sulfation        | Abs/.1mm | *ASTM D7415 | >30   | <b>18.1</b>    | 18.0  | 17.6  |
| Silt             | scalar   | *Visual     | NONE  | <b>NONE</b>    | NONE  | NONE  |
| Debris           | scalar   | *Visual     | NONE  | <b>NONE</b>    | NONE  | NONE  |
| Sand/Dirt        | scalar   | *Visual     | NONE  | <b>NONE</b>    | NONE  | NONE  |
| Appearance       | scalar   | *Visual     | NORML | <b>NORML</b>   | NORML | NORML |
| Odor             | scalar   | *Visual     | NORML | <b>NORML</b>   | NORML | NORML |
| Emulsified Water | scalar   | *Visual     | >0.21 | <b>NEG</b>     | NEG   | NEG   |

**FLUID CONDITION**


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

|                  |          |             |      |              |      |      |
|------------------|----------|-------------|------|--------------|------|------|
| Sodium           | ppm      | ASTM D5185m | >216 | <b>2</b>     | 1    | 0    |
| Boron            | ppm      | ASTM D5185m | 250  | <b>62</b>    | 66   | 88   |
| Barium           | ppm      | ASTM D5185m | 10   | <b>0</b>     | 0    | 0    |
| Molybdenum       | ppm      | ASTM D5185m | 100  | <b>94</b>    | 85   | 75   |
| Manganese        | ppm      | ASTM D5185m |      | <b>&lt;1</b> | <1   | 0    |
| Magnesium        | ppm      | ASTM D5185m | 450  | <b>16</b>    | 21   | 18   |
| Calcium          | ppm      | ASTM D5185m | 3000 | <b>2383</b>  | 2169 | 2243 |
| Phosphorus       | ppm      | ASTM D5185m | 1150 | <b>1111</b>  | 1065 | 1076 |
| Zinc             | ppm      | ASTM D5185m | 1350 | <b>1328</b>  | 1252 | 1250 |
| Sulfur           | ppm      | ASTM D5185m | 4250 | <b>4119</b>  | 3882 | 4444 |
| Oxidation        | Abs/.1mm | *ASTM D7414 | >25  | <b>13.5</b>  | 13.2 | 12.1 |
| Base Number (BN) | mg KOH/g | ASTM D2896  | 8.5  | <b>6.8</b>   | 7.1  | 7.4  |
| Visc @ 100°C     | cSt      | ASTM D445   | 14.4 | <b>12.9</b>  | 12.9 | 12.4 |


FT-IR (Direct Trend)

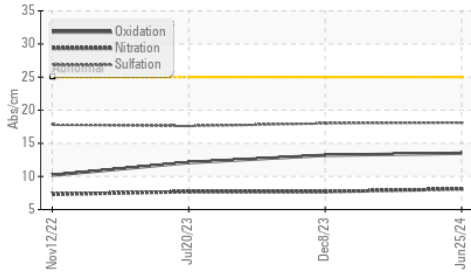


Ferrous Alloys

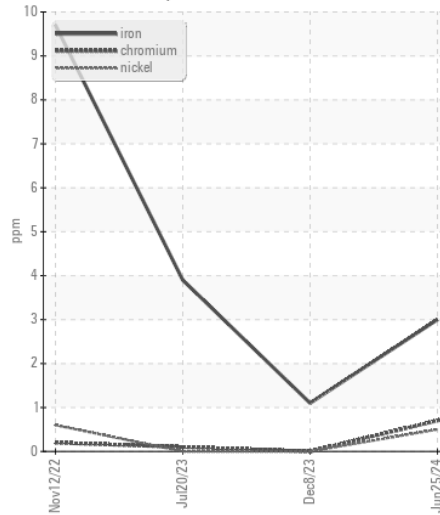


Base Number

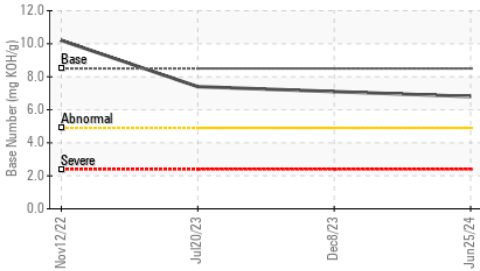


Non-ferrous Metals

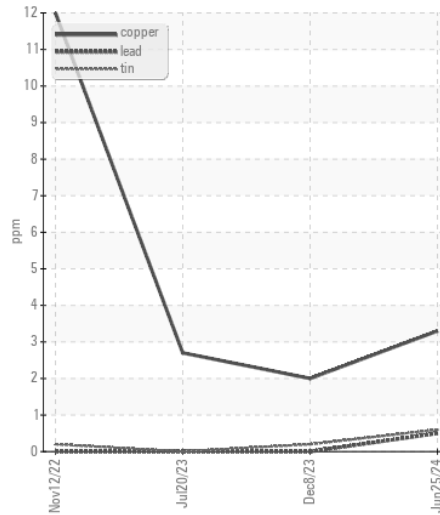


Viscosity @ 100°C

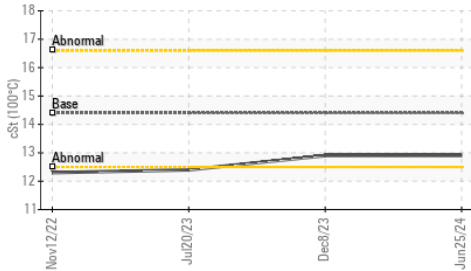

Viscosity @ 100°C

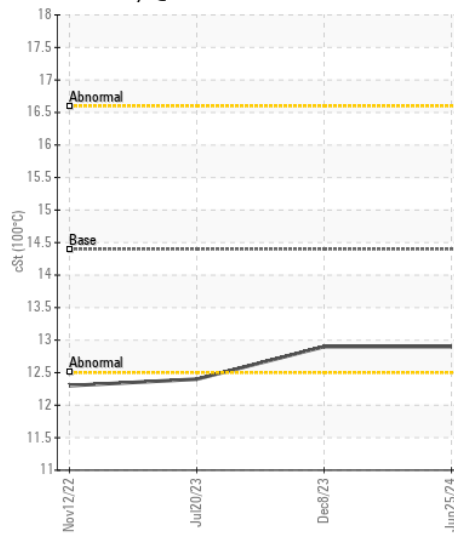

Base Number

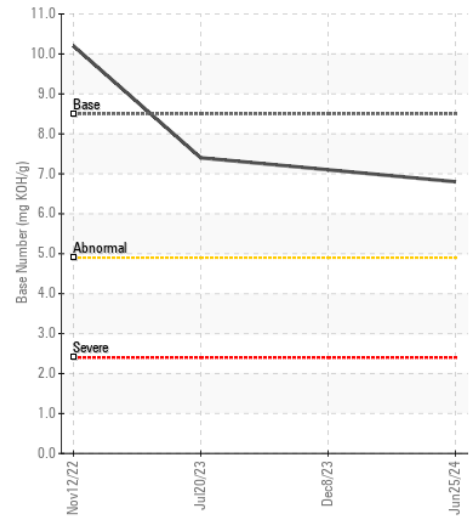

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : CL0005589 Received : 08 Jul 2024  
 Lab Number : 06229739 Tested : 09 Jul 2024  
 Unique Number : 11113232 Diagnosed : 09 Jul 2024 - Wes Davis  
 Test Package : CONST ( Additional Tests: TBN )

**BAKER AR**  
 8819 COLUMBUS RD  
 DAVIDSON, NC  
 US 28036  
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: