



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area  
**(EDB493)**  
Machine Id  
**3709C**  
Component  
**Natural Gas Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (8 GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0111585</b>	GFL0111572	GFL0111514
Sample Date		Client Info		<b>28 Jun 2024</b>	01 May 2024	02 Apr 2024
Machine Age	hrs	Client Info		<b>0</b>	0	0
Oil Age	hrs	Client Info		<b>0</b>	0	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>N/A</b>	N/A	N/A
Filter Changed		Client Info		<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>50	<b>16</b>	42	42
Chromium	ppm	ASTM D5185m	>4	<b>1</b>	5	5
Nickel	ppm	ASTM D5185m	>2	<b>&lt;1</b>	0	<1
Titanium	ppm	ASTM D5185m		<b>0</b>	0	<1
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>9	<b>5</b>	7	6
Lead	ppm	ASTM D5185m	>30	<b>1</b>	2	2
Copper	ppm	ASTM D5185m	>35	<b>2</b>	3	3
Tin	ppm	ASTM D5185m	>4	<b>&lt;1</b>	1	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	<1
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>+100	<b>5</b>	10	11
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	1	0
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844		<b>0.1</b>	0.1	0.1
Nitration	Abs/cm	*ASTM D7624	>20	<b>9.5</b>	11.7	9.0
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>20.3</b>	25.6	21.7
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>6</b>	7	4
Boron	ppm	ASTM D5185m	0	<b>17</b>	9	4
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	60	<b>56</b>	60	61
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	4	3
Magnesium	ppm	ASTM D5185m	1010	<b>632</b>	723	753
Calcium	ppm	ASTM D5185m	1070	<b>1650</b>	1624	1804
Phosphorus	ppm	ASTM D5185m	1150	<b>825</b>	862	946
Zinc	ppm	ASTM D5185m	1270	<b>1020</b>	1103	1151
Sulfur	ppm	ASTM D5185m	2060	<b>2827</b>	2960	3200
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>17.3</b>	23.4	18.8
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>6.1</b>	4.2	6.5
Visc @ 100°C	cSt	ASTM D445	15.4	<b>14.4</b>	14.1	14.2


FT-IR (Direct Trend)

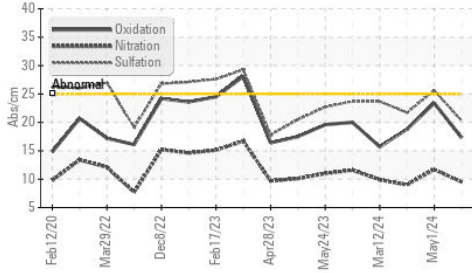


Base Number

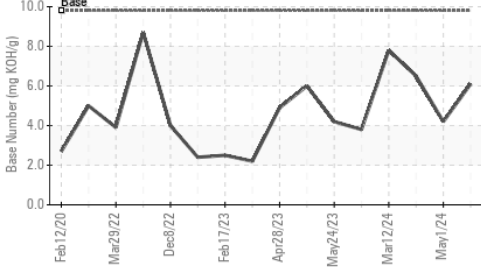


Viscosity @ 100°C

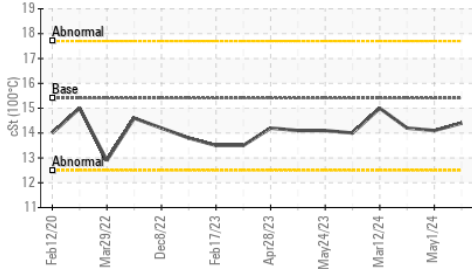


Ferrous Alloys

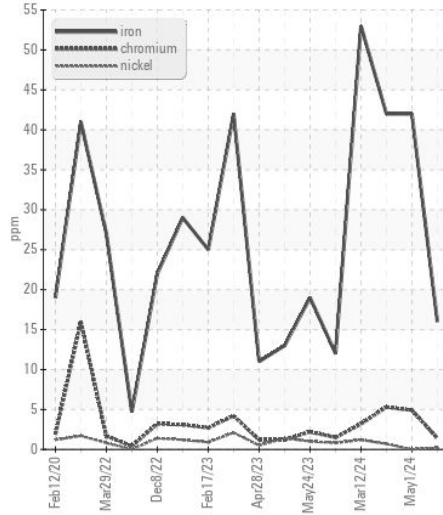


Non-ferrous Metals

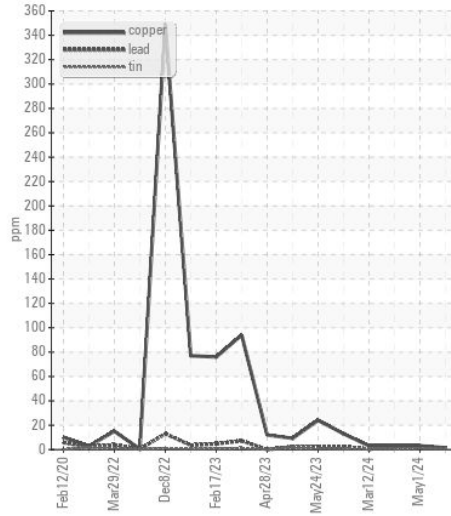

Viscosity @ 100°C

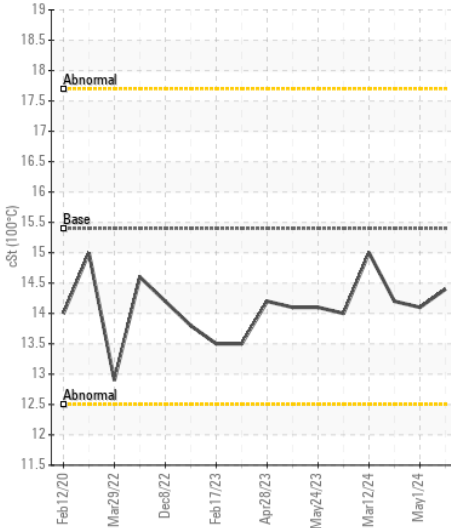

Base Number

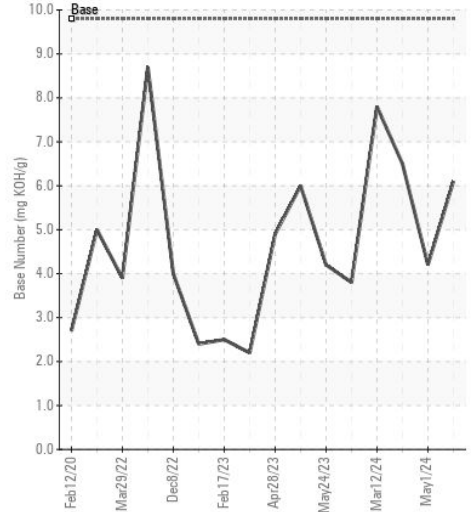

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : GFL0111585

Lab Number : 06229844

Unique Number : 11113337

Test Package : FLEET

Received : 08 Jul 2024

Tested : 09 Jul 2024

Diagnosed : 09 Jul 2024 - Don Baldrige

GFL Environmental - 074 - Douglas - Transwaste

1219 Landfill Road

Douglas, GA

US 31533

Contact: CURTIS JACOBS

CURTIS.JACOBS@GFLENV.COM

T: (912)384-6001

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)