



| | |
|-----------------|---------------|
| WEAR | NORMAL |
| CONTAMINATION | NORMAL |
| FLUID CONDITION | NORMAL |

Machine Id
JOHN DEERE %2 744 P 1DW744PACNLX05964
 Component
Hydraulic System
 Fluid
JOHN DEERE HYDRAU (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|----------------|-----|-------------|-----------|--------------------|-------------|----------|
| Sample Number | | Client Info | | JR0218891 | JR0193466 | --- |
| Sample Date | | Client Info | | 26 Jun 2024 | 05 Dec 2023 | --- |
| Machine Age | hrs | Client Info | | 1469 | 976 | --- |
| Oil Age | hrs | Client Info | | 1469 | 976 | --- |
| Filter Age | hrs | Client Info | | 1469 | 0 | --- |
| Oil Changed | | Client Info | | Not Changd | Not Changd | --- |
| Filter Changed | | Client Info | | Not Changd | Not Changd | --- |
| Sample Status | | | | NORMAL | ATTENTION | --- |

WEAR

All component wear rates are normal.

| PQ | UOM | Method | Limit/Abn | Current | History1 | History2 |
|--------------|--------|-------------|-----------|--------------|----------|----------|
| Iron | ppm | ASTM D5185m | >20 | 6 | 6 | --- |
| Chromium | ppm | ASTM D5185m | >10 | <1 | <1 | --- |
| Nickel | ppm | ASTM D5185m | >10 | 0 | <1 | --- |
| Titanium | ppm | ASTM D5185m | | 0 | 0 | --- |
| Silver | ppm | ASTM D5185m | | 0 | 0 | --- |
| Aluminum | ppm | ASTM D5185m | >10 | <1 | <1 | --- |
| Lead | ppm | ASTM D5185m | >10 | 0 | 0 | --- |
| Copper | ppm | ASTM D5185m | >75 | 2 | 2 | --- |
| Tin | ppm | ASTM D5185m | >10 | 0 | 0 | --- |
| Vanadium | ppm | ASTM D5185m | | 0 | 0 | --- |
| White Metal | scalar | *Visual | NONE | NONE | NONE | --- |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE | --- |

CONTAMINATION











The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

| | | | | | | |
|------------------|--------|--------------|-----------|-----------------|----------|-----|
| Silicon | ppm | ASTM D5185m | >20 | 6 | 7 | --- |
| Potassium | ppm | ASTM D5185m | >20 | 1 | 2 | --- |
| Water | | WC Method | >0.1 | NEG | NEG | --- |
| Particles >4µm | | ASTM D7647 | >5000 | 3894 | 7198 | --- |
| Particles >6µm | | ASTM D7647 | >1300 | 357 | 1945 | --- |
| Particles >14µm | | ASTM D7647 | >160 | 20 | 155 | --- |
| Particles >21µm | | ASTM D7647 | >40 | 3 | 39 | --- |
| Particles >38µm | | ASTM D7647 | >10 | 0 | 1 | --- |
| Particles >71µm | | ASTM D7647 | >3 | 0 | 1 | --- |
| Oil Cleanliness | | ISO 4406 (c) | >19/17/14 | 19/16/11 | 20/18/14 | --- |
| Silt | scalar | *Visual | NONE | NONE | NONE | --- |
| Debris | scalar | *Visual | NONE | NONE | NONE | --- |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE | --- |
| Appearance | scalar | *Visual | NORML | NORML | NORML | --- |
| Odor | scalar | *Visual | NORML | NORML | NORML | --- |
| Emulsified Water | scalar | *Visual | >0.1 | NEG | NEG | --- |

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

| | | | | | | |
|------------------|----------|-------------|------|-------------|------|-----|
| Sodium | ppm | ASTM D5185m | | 4 | 1 | --- |
| Boron | ppm | ASTM D5185m | | 0 | 0 | --- |
| Barium | ppm | ASTM D5185m | | 0 | 0 | --- |
| Molybdenum | ppm | ASTM D5185m | | 0 | <1 | --- |
| Manganese | ppm | ASTM D5185m | | 0 | 0 | --- |
| Magnesium | ppm | ASTM D5185m | | 0 | 2 | --- |
| Calcium | ppm | ASTM D5185m | 87 | 82 | 97 | --- |
| Phosphorus | ppm | ASTM D5185m | 727 | 600 | 653 | --- |
| Zinc | ppm | ASTM D5185m | 900 | 729 | 839 | --- |
| Sulfur | ppm | ASTM D5185m | 1500 | 1616 | 1523 | --- |
| Acid Number (AN) | mg KOH/g | ASTM D8045 | 1.0 | 0.65 | 0.68 | --- |
| Visc @ 40°C | cSt | ASTM D445 | 65 | 57.2 | 58.4 | --- |

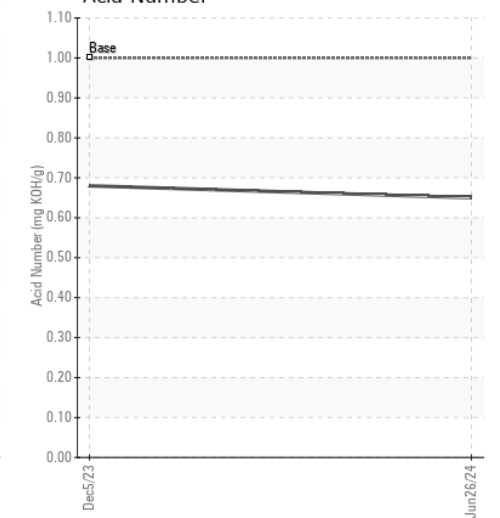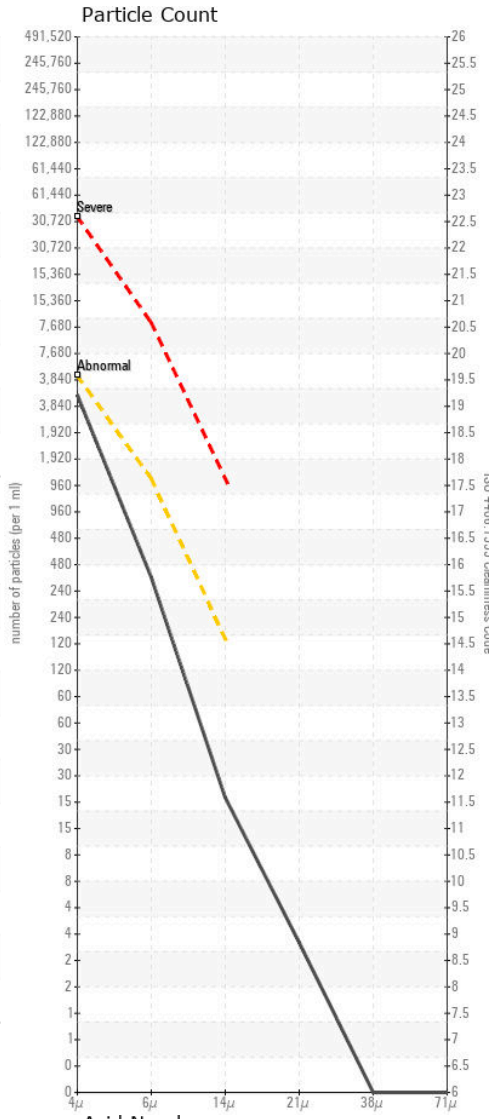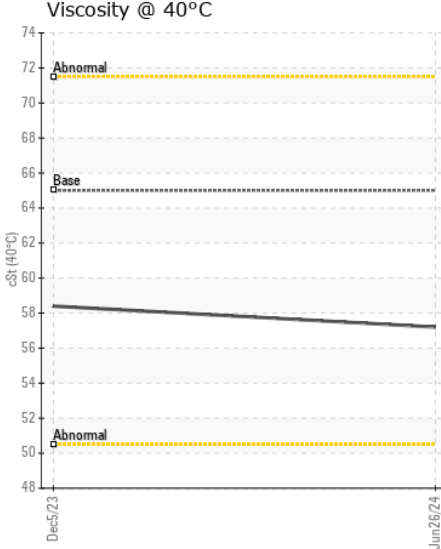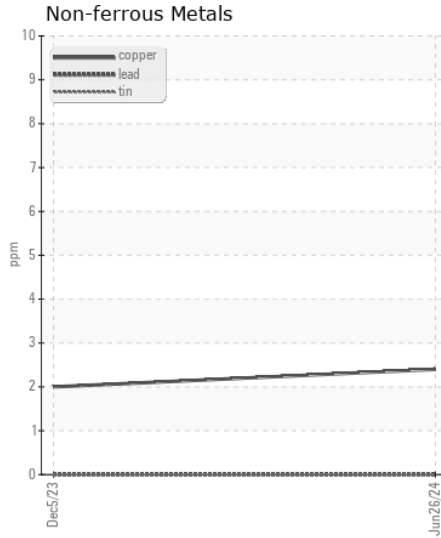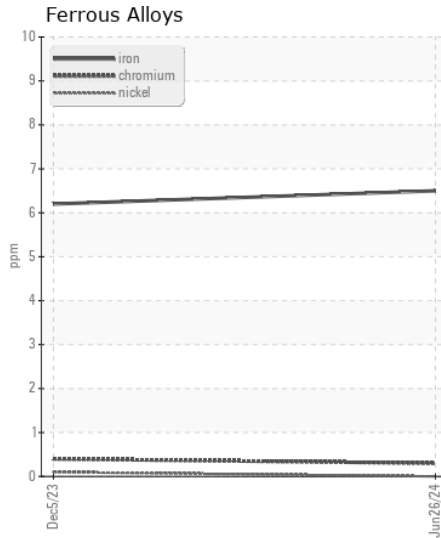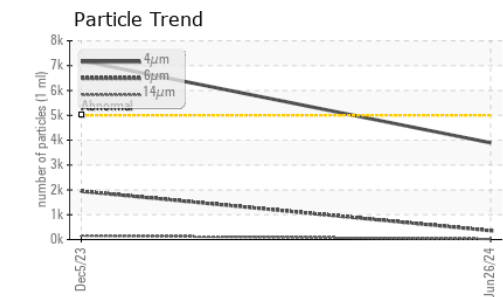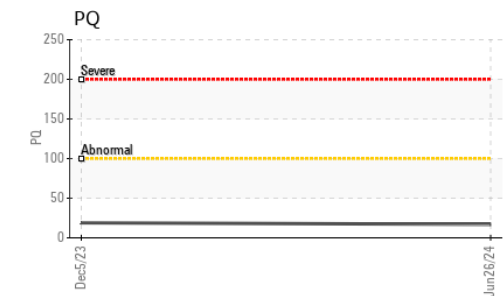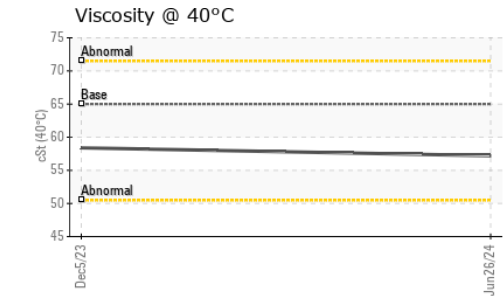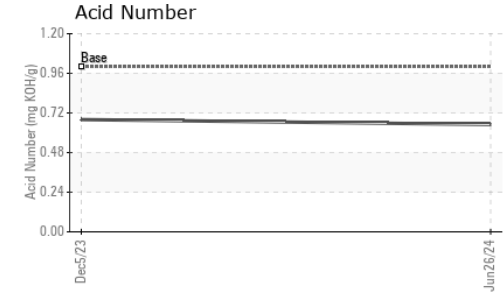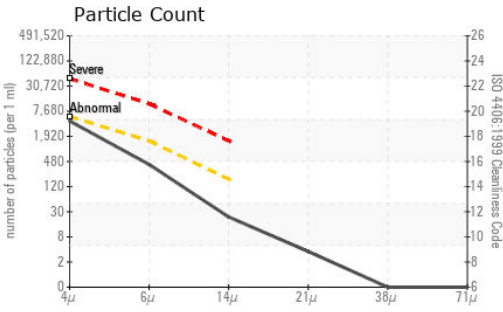

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0218891 **Received** : 08 Jul 2024
Lab Number : 06230058 **Tested** : 09 Jul 2024
Unique Number : 11113551 **Diagnosed** : 09 Jul 2024 - Wes Davis
Test Package : CONST (Additional Tests: PQ)

JRE - ASHEVILLE
 101 BRUCE DRIVE
 ASHEVILLE, NC
 US 28806

Contact: Randy Warren
 randy.warren@jamesriverequipment.com
 T: (528)667-0176
 F: (828)667-4865

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)