



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area  
**PALEXTRA 44**  
Machine Id  
**SULLIVAN PALATEK 1201170007 - NORTH JACKSON OH**  
Component  
**Compressor**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>UCS06230282</b>	UCS04325620	---
Sample Date		Client Info		<b>02 Jul 2024</b>	10 Oct 2017	---
Machine Age	hrs	Client Info		<b>98893</b>	44618	---
Oil Age	hrs	Client Info		<b>1694</b>	2006	---
Filter Age	hrs	Client Info		<b>1694</b>	300	---
Oil Changed		Client Info		<b>Not Changd</b>	N/A	---
Filter Changed		Client Info		<b>Changed</b>	N/A	---
Sample Status				<b>NORMAL</b>	NORMAL	---

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>50	<b>&lt;1</b>	0	---
Chromium	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	---
Nickel	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Silver	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Aluminum	ppm	ASTM D5185m	>25	<b>2</b>	0	---
Lead	ppm	ASTM D5185m	>25	<b>&lt;1</b>	0	---
Copper	ppm	ASTM D5185m	>50	<b>1</b>	0	---
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	0	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

### CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>6</b>	3	---
Potassium	ppm	ASTM D5185m	>20	<b>1</b>	0	---
Water		WC Method	>0.1	<b>NEG</b>	NEG	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>LIGHT</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	---

### FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>0</b>	0	---
Boron	ppm	ASTM D5185m	0.0	<b>0</b>	0	---
Barium	ppm	ASTM D5185m	0.0	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	---
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	---
Magnesium	ppm	ASTM D5185m	0.0	<b>&lt;1</b>	<1	---
Calcium	ppm	ASTM D5185m	0.0	<b>0</b>	0	---
Phosphorus	ppm	ASTM D5185m	966	<b>390</b>	317	---
Zinc	ppm	ASTM D5185m	0	<b>0</b>	0	---
Sulfur	ppm	ASTM D5185m	1309	<b>814</b>	56	---
Acid Number (AN)	mg KOH/g	ASTM D8045	0.172	<b>0.19</b>	0.276	---
Visc @ 40°C	cSt	ASTM D445	39.9	<b>45.3</b>	43.86	---

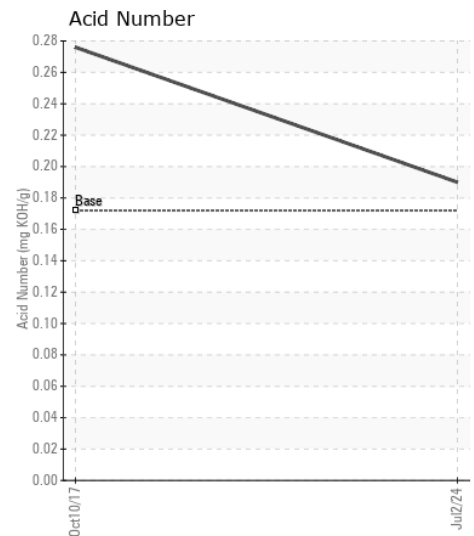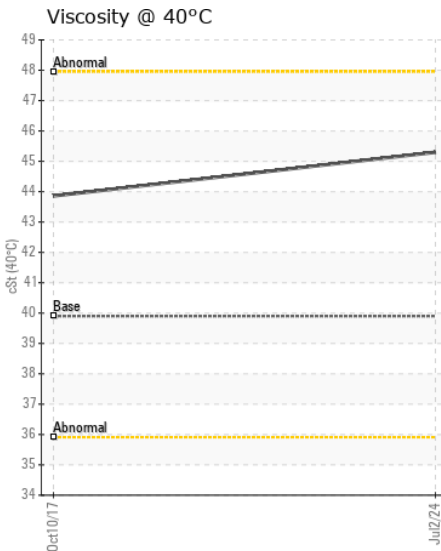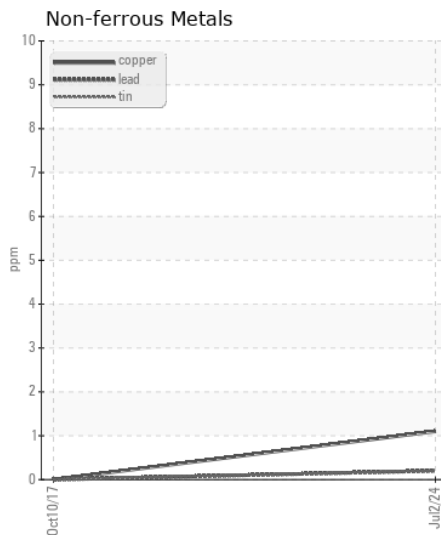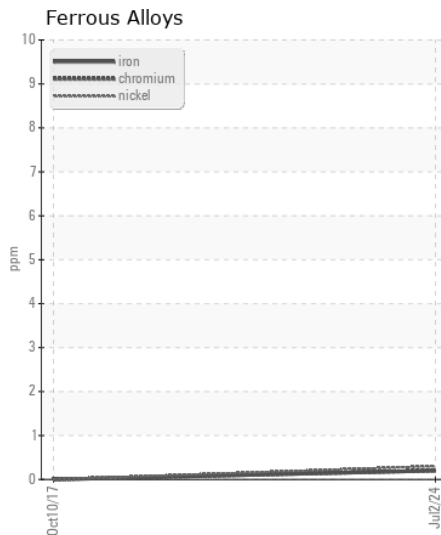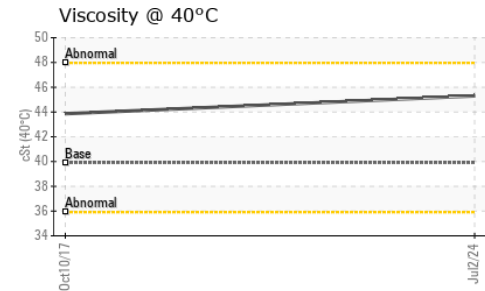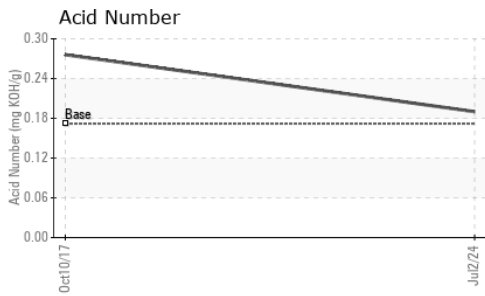

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513

**Sample No.** : UCS06230282

**Lab Number** : 06230282

**Unique Number** : 11113775

**Test Package** : IND 2

**Received** : 08 Jul 2024

**Tested** : 09 Jul 2024

**Diagnosed** : 09 Jul 2024 - Wes Davis

**TRI-STATE AIR COMPRESSOR**

10635 RAPP RD

MIDDLETOWN, OH

US 44442

Contact:

tristateaircompressor@gmail.com

T: (330)717-6507

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)