



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Area  
**G.LOPES CONSTRUCTION INC./Off-Road**  
Machine Id  
**BH65**  
Component  
**Transmission (Manual)**  
Fluid  
**PETRO CANADA PRODURO TO-4 SAE 30 (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>PCA0122715</b>	PCA0098359	PCA17178039
Sample Date		Client Info		<b>02 Jul 2024</b>	28 Jun 2023	02 Jan 2019
Machine Age	hrs	Client Info		<b>9111</b>	8757	7596
Oil Age	hrs	Client Info		<b>5330</b>	5330	---
Filter Age	hrs	Client Info		<b>0</b>	0	---
Oil Changed		Client Info		<b>N/A</b>	N/A	N/A
Filter Changed		Client Info		<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>200	<b>9</b>	11	23
Chromium	ppm	ASTM D5185m	>5	<b>&lt;1</b>	0	0
Nickel	ppm	ASTM D5185m	>5	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
Silver	ppm	ASTM D5185m	>7	<b>&lt;1</b>	0	---
Aluminum	ppm	ASTM D5185m	>25	<b>2</b>	<1	1
Lead	ppm	ASTM D5185m	>45	<b>&lt;1</b>	0	0
Copper	ppm	ASTM D5185m	>225	<b>15</b>	6	17
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

**CONTAMINATION**











There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>125	<b>6</b>	4	3
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	0	3
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	---

**FLUID CONDITION**

The AN level is acceptable for this fluid. The condition of the fluid is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>&lt;1</b>	2	2
Boron	ppm	ASTM D5185m	2	<b>17</b>	21	3
Barium	ppm	ASTM D5185m	0	<b>0</b>	14	0
Molybdenum	ppm	ASTM D5185m	0	<b>4</b>	5	5
Manganese	ppm	ASTM D5185m	9	<b>&lt;1</b>	<1	---
Magnesium	ppm	ASTM D5185m	1	<b>33</b>	61	21
Calcium	ppm	ASTM D5185m	3131	<b>2890</b>	2887	3212
Phosphorus	ppm	ASTM D5185m	1194	<b>924</b>	994	1157
Zinc	ppm	ASTM D5185m	1281	<b>1195</b>	1232	1190
Sulfur	ppm	ASTM D5185m	3811	<b>6235</b>	10731	---
Acid Number (AN)	mg KOH/g	ASTM D8045		<b>1.50</b>	1.47	---
Visc @ 40°C	cSt	ASTM D445	88.5	<b>84.7</b>	82.0	---

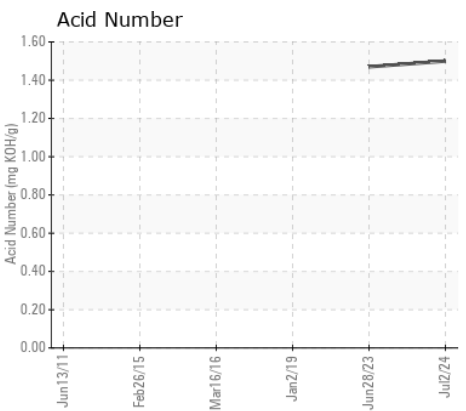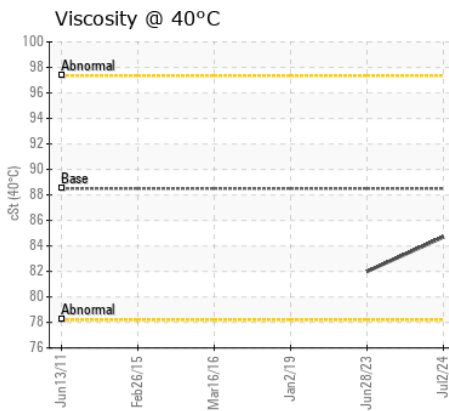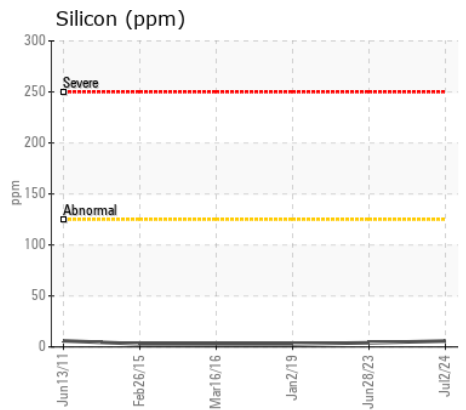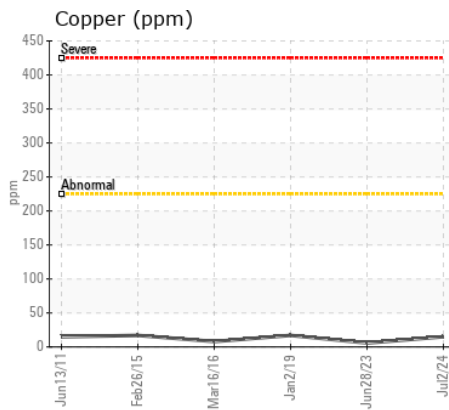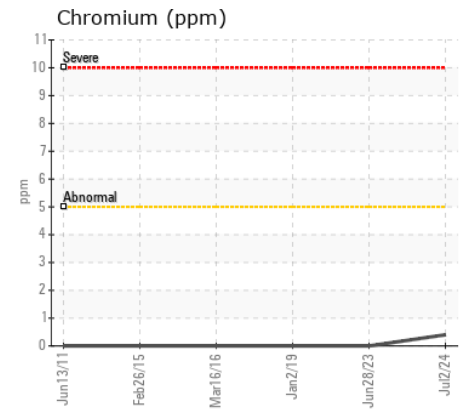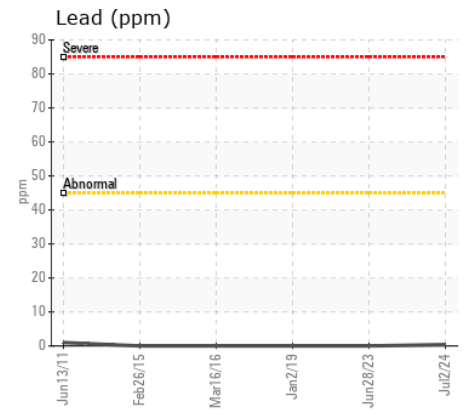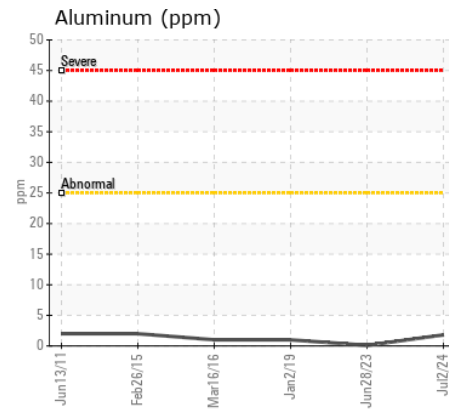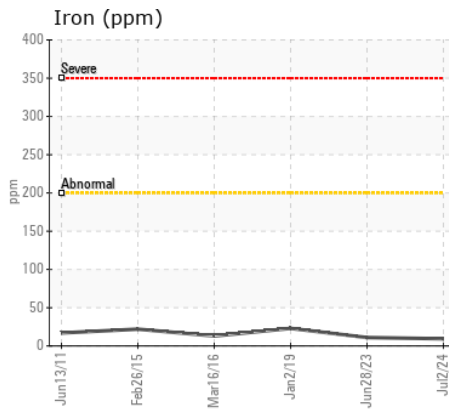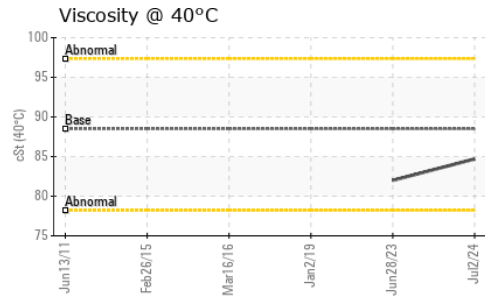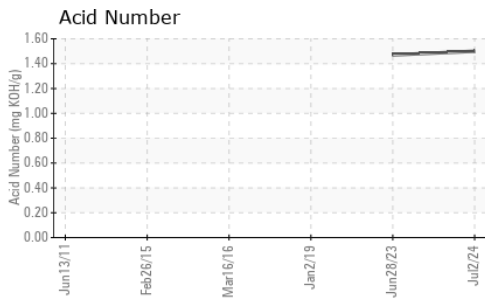

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0122715 **Received** : 08 Jul 2024  
**Lab Number** : 06230324 **Tested** : 09 Jul 2024  
**Unique Number** : 11113817 **Diagnosed** : 09 Jul 2024 - Wes Davis  
**Test Package** : MOB 2

**G LOPES CONSTRUCTION**  
 565 WINTHROP ST  
 TAUNTON, MA  
 US 02780  
 Contact: BUTCH MCGRATH  
 bmcgrath@glopes.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: