



TRAAP

Texas Refinery Advanced Analysis Program

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
FREIGHTLINER 5379

Component
Transmission (Auto)

Fluid
TRC TEXTRANS MULTI-VEHICLE SYN ATF (26 QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		TR06230346	TR05801117	TR05530549
Sample Date		Client Info		27 Jun 2024	01 Mar 2023	12 Apr 2022
Machine Age	hrs	Client Info		182	26549	25548
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	Not Changd	Not Changd
Filter Changed		Client Info		N/A	Not Changd	Not Changd
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>160	104	106	73
Chromium	ppm	ASTM D5185m	>5	<1	<1	<1
Nickel	ppm	ASTM D5185m	>5	<1	0	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m	>5	<1	0	0
Aluminum	ppm	ASTM D5185m	>50	12	11	10
Lead	ppm	ASTM D5185m	>50	4	3	2
Copper	ppm	ASTM D5185m	>225	116	78	48
Tin	ppm	ASTM D5185m	>10	3	2	2
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION












There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>20	14	13	11
Potassium	ppm	ASTM D5185m	>20	2	3	1
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the fluid is suitable for further service.

Sodium	ppm	ASTM D5185m		7	5	6
Boron	ppm	ASTM D5185m		311	296	272
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		<1	0	0
Manganese	ppm	ASTM D5185m		1	1	<1
Magnesium	ppm	ASTM D5185m		2	2	1
Calcium	ppm	ASTM D5185m		226	223	225
Phosphorus	ppm	ASTM D5185m		612	586	616
Zinc	ppm	ASTM D5185m		16	10	4
Sulfur	ppm	ASTM D5185m		2167	2640	1806
Acid Number (AN)	mg KOH/g	ASTM D8045		1.92	1.82	1.49
Visc @ 40°C	cSt	ASTM D445		30.2	---	31.2
Visc @ 100°C	cSt	ASTM D445	7.3	6.3	6.5	6.65
Viscosity Index (VI)	Scale	ASTM D2270	193	166	---	177

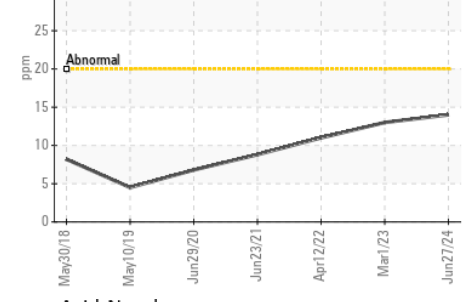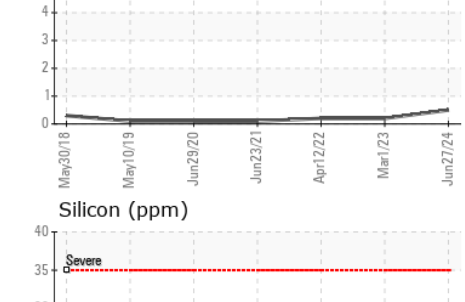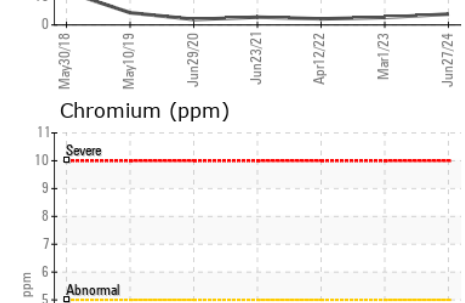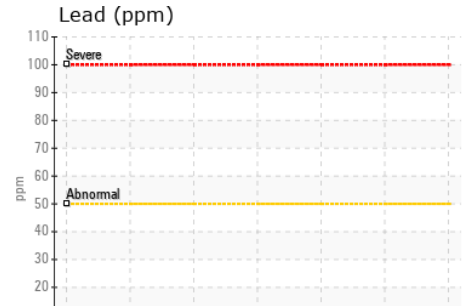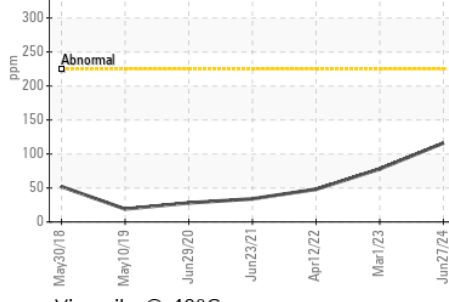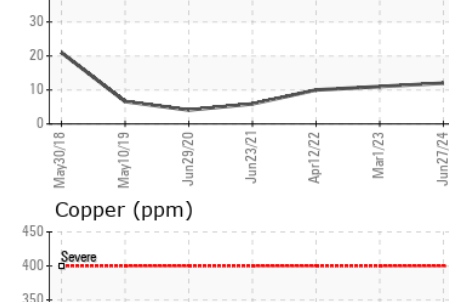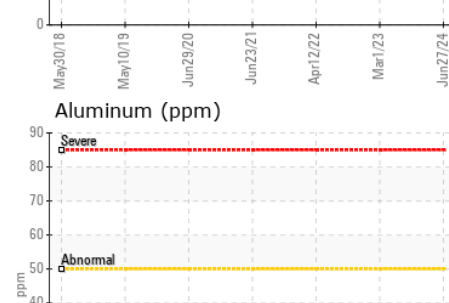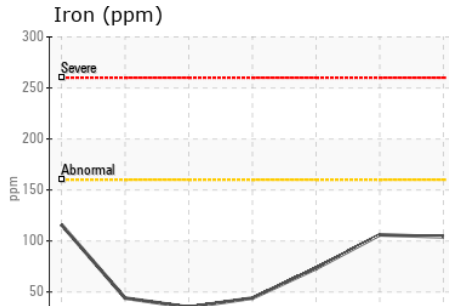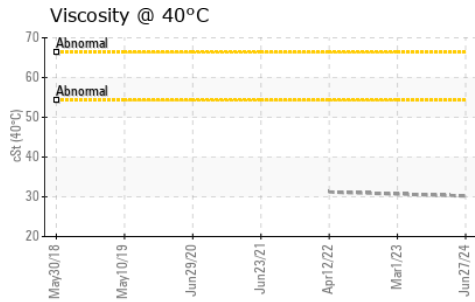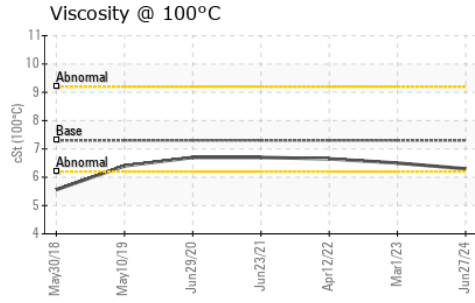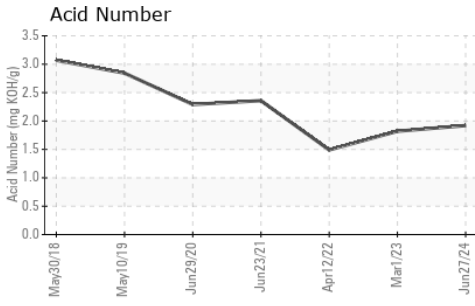

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : TR06230346 **Received** : 08 Jul 2024
Lab Number : 06230346 **Tested** : 09 Jul 2024
Unique Number : 11113839 **Diagnosed** : 10 Jul 2024 - Don Baldrige
Test Package : MOB 2 (Additional Tests: KV100, VI)

MATHIOWETZ CONSTRUCTION COMPANY
 30676 COUNTY RD 24
 SLEEPY EYE, MN
 US 56085
 Contact: Jim Warwick
 jimwarwick@mathiowetzconst.com
 T:
 F:

To discuss this sample report, contact Customer Service at 1-800-827-0711.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)