



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area  
**WCLSNC**  
Machine Id  
**QC230801DE**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>WC0961140</b>	WC0961137	WC0961135
Sample Date		Client Info		<b>08 Jul 2024</b>	05 Jul 2024	03 Jul 2024
Machine Age	hrs	Client Info		<b>0</b>	0	0
Oil Age	hrs	Client Info		<b>0</b>	0	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Filter Changed		Client Info		<b>N/A</b>	N/A	N/A
Filter Changed		Client Info		<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

## WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
PQ		ASTM D8184		<b>22</b>	---	---
Iron	ppm	ASTM D5185m	>11	<b>10</b>	10	7
Chromium	ppm	ASTM D5185m	>3	<b>1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>2	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185m	>2	<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m	>2	<b>&lt;1</b>	<1	<1
Aluminum	ppm	ASTM D5185m	>5	<b>2</b>	3	2
Lead	ppm	ASTM D5185m	>2	<b>&lt;1</b>	<1	0
Copper	ppm	ASTM D5185m	>7	<b>5</b>	5	3
Tin	ppm	ASTM D5185m	>2	<b>&lt;1</b>	0	<1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

## CONTAMINATION














There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>14	<b>6</b>	7	4
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	2	3
Fuel	%	ASTM D3524	>4.1	<b>2.3</b>	2.4	2.4
Water	%	ASTM D6304	>0.2	<b>NEG</b>	NEG	NEG
Glycol	%	*ASTM D2982		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>0.3	<b>0.1</b>	0.1	0.1
Nitration	Abs/cm	*ASTM D7624	>10.8	<b>10.5</b>	10.5	10.5
Sulfation	Abs/.1mm	*ASTM D7415	>20.8	<b>20.0</b>	19.9	20.0
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

## FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>13	<b>7</b>	10	8
Boron	ppm	ASTM D5185m	0	<b>9</b>	2	9
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	60	<b>50</b>	53	50
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	1010	<b>529</b>	561	586
Calcium	ppm	ASTM D5185m	1070	<b>1493</b>	1711	1557
Phosphorus	ppm	ASTM D5185m	1150	<b>673</b>	754	740
Zinc	ppm	ASTM D5185m	1270	<b>944</b>	983	984
Sulfur	ppm	ASTM D5185m	2060	<b>2423</b>	2787	2876
Oxidation	Abs/.1mm	*ASTM D7414	>17.9	<b>17.1</b>	17.1	17.1
Acid Number (AN)	mg KOH/g	ASTM D8045	3.2	<b>0.84</b>	0.67	0.74
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>7.41</b>	7.06	7.59
Visc @ 40°C	cSt	ASTM D445	113.9	<b>98.6</b>	98.18	99.0
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.3</b>	13.4	13.4
Viscosity Index (VI)	Scale	ASTM D2270	142	<b>133</b>	135	134

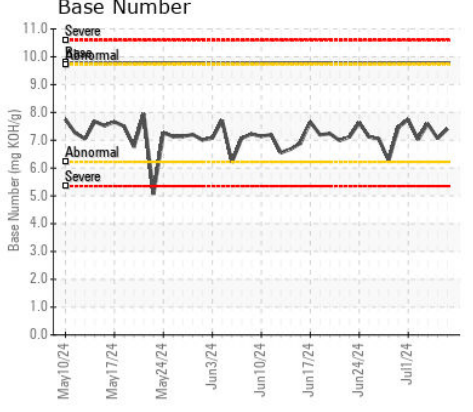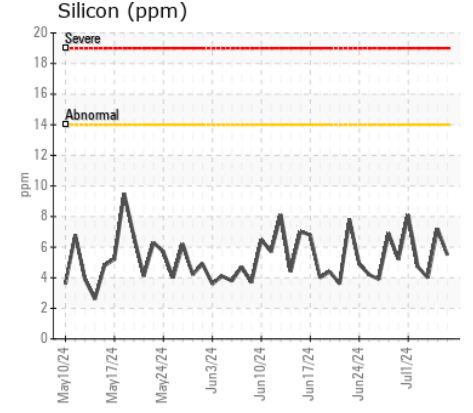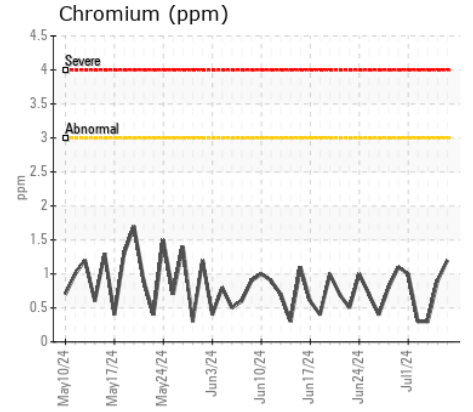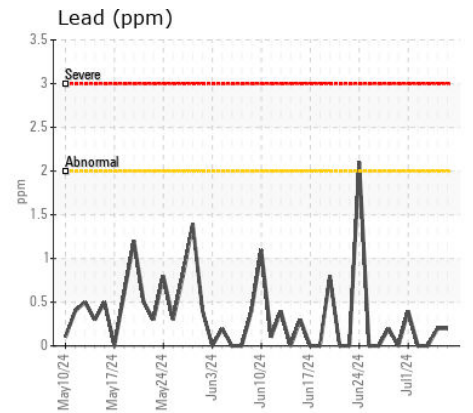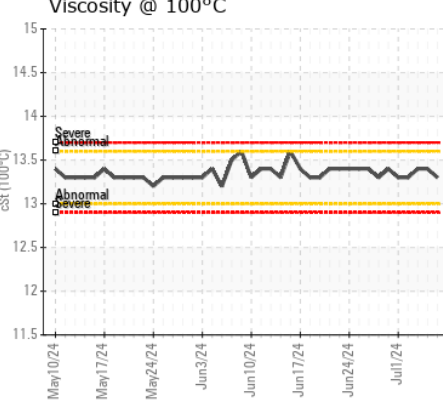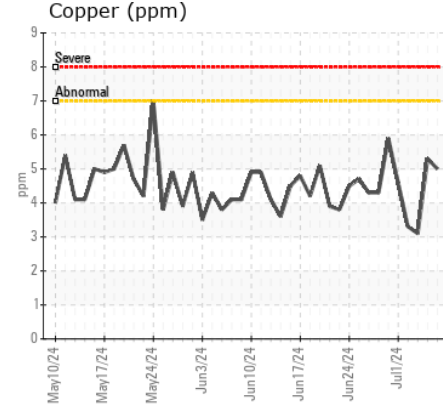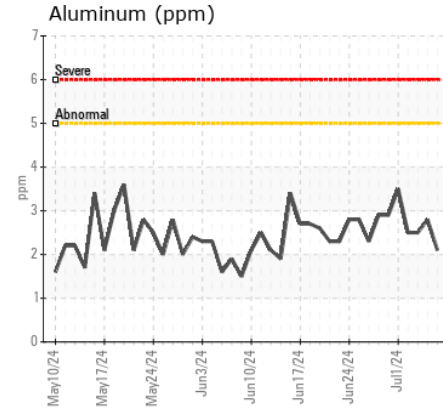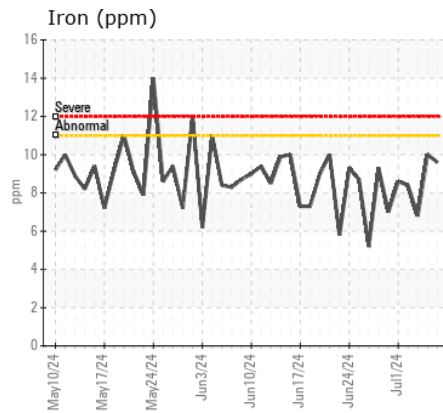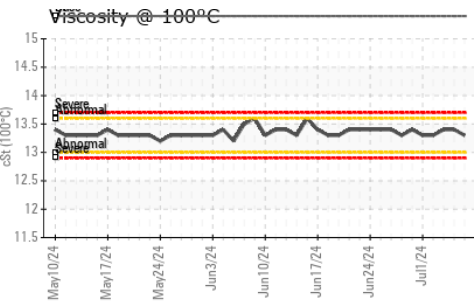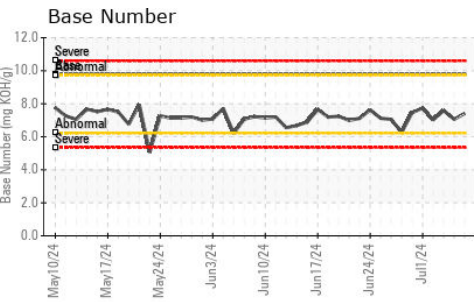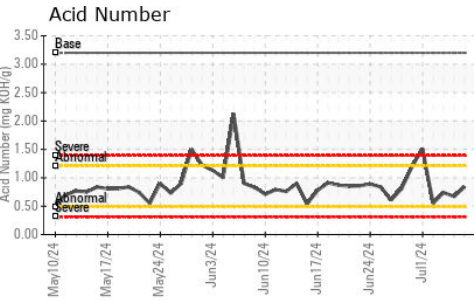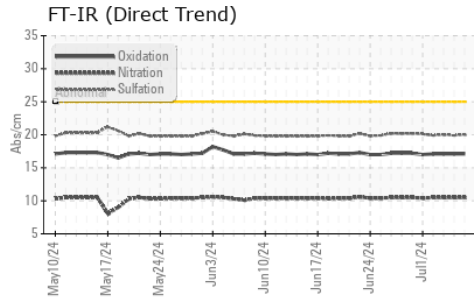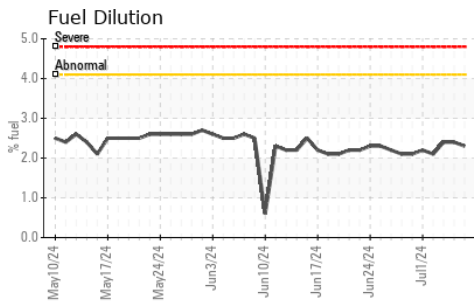

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : WC0961140

Lab Number : 06230351

Unique Number : 11113844

Test Package : MOB 2 ( Additional Tests: FuelDilution, Glycol, KF, KV40, PercentFuel, PQ, Vbhtact: WCLS CARY NC

Received : 08 Jul 2024

Tested : 15 Jul 2024

Diagnosed : 15 Jul 2024 - Sean Felton

WEARCHECK LUBRICATION SERVICES QA ACCOUNT

501 Madison Ave

Cary, NC

US 27513

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (919)379-4102

F: (919)379-4050