

Area  
**G. LOPES CONSTRUCTION INC./ON-ROAD**  
Machine Id  
**368**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>PCA0123016</b>	PCA0109903	PCA0109755
Sample Date		Client Info		<b>02 Jul 2024</b>	01 Apr 2024	26 Dec 2023
Machine Age	hrs	Client Info		<b>72000</b>	52000	32000
Oil Age	hrs	Client Info		<b>72000</b>	52000	32000
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>N/A</b>	N/A	N/A
Filter Changed		Client Info		<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>30</b>	32	32
Chromium	ppm	ASTM D5185m	>20	<b>3</b>	2	2
Nickel	ppm	ASTM D5185m	>4	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m	>3	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>10</b>	11	19
Lead	ppm	ASTM D5185m	>40	<b>&lt;1</b>	0	<1
Copper	ppm	ASTM D5185m	>330	<b>36</b>	69	165
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	<1	2
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>8</b>	5	7
Potassium	ppm	ASTM D5185m	>20	<b>23</b>	24	51
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	0.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.6</b>	0.5	0.4
Nitration	Abs/cm	*ASTM D7624	>20	<b>9.8</b>	9.7	9.0
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>21.3</b>	20.8	20.7
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>0</b>	2	2
Boron	ppm	ASTM D5185m	0	<b>2</b>	2	6
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	60	<b>62</b>	64	59
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	1010	<b>971</b>	1009	864
Calcium	ppm	ASTM D5185m	1070	<b>1198</b>	1213	1196
Phosphorus	ppm	ASTM D5185m	1150	<b>961</b>	981	843
Zinc	ppm	ASTM D5185m	1270	<b>1271</b>	1212	1072
Sulfur	ppm	ASTM D5185m	2060	<b>2306</b>	2683	1944
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>18.4</b>	17.6	18.1
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>8.42</b>	8.26	9.77
Visc @ 100°C	cSt	ASTM D445	15.4	<b>12.8</b>	12.7	12.3

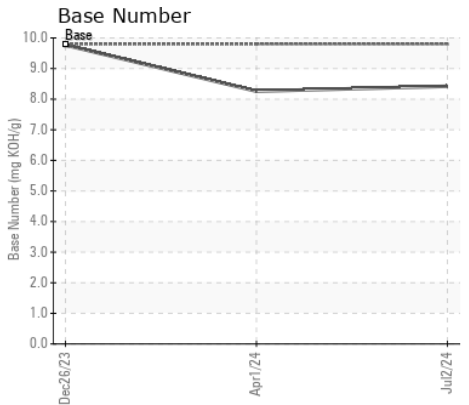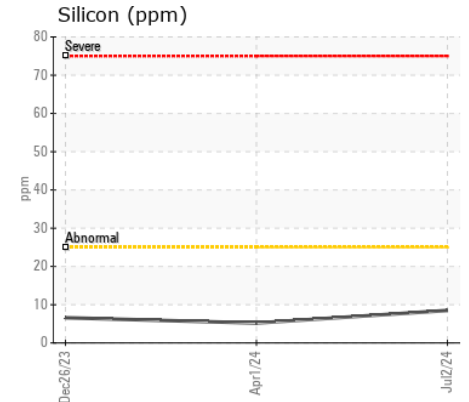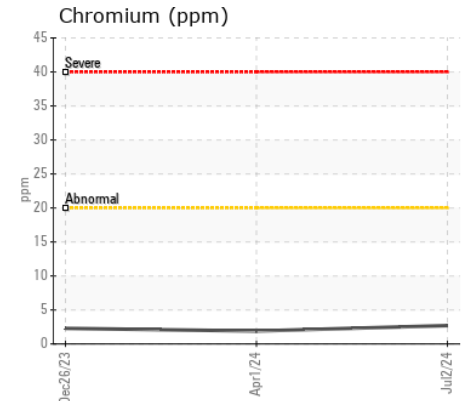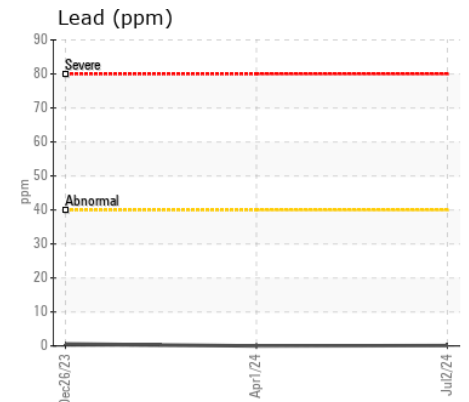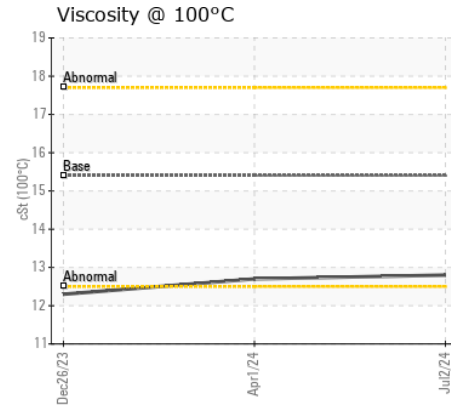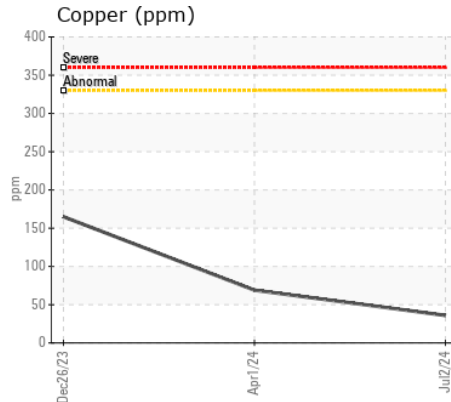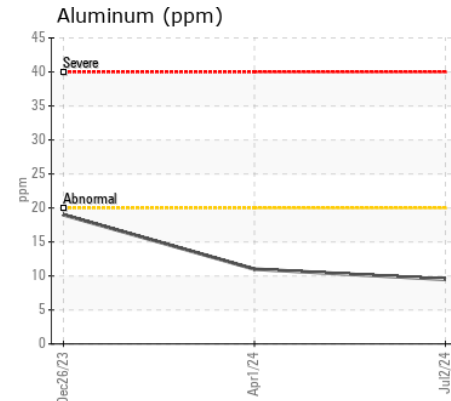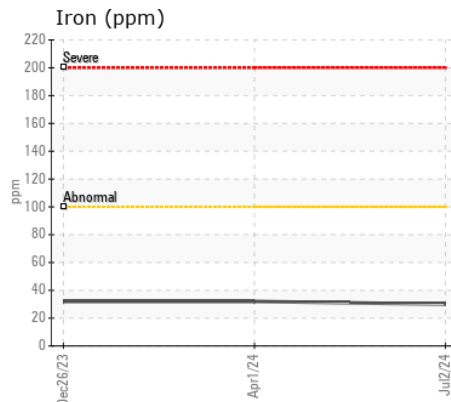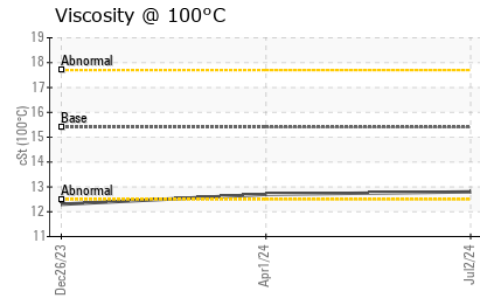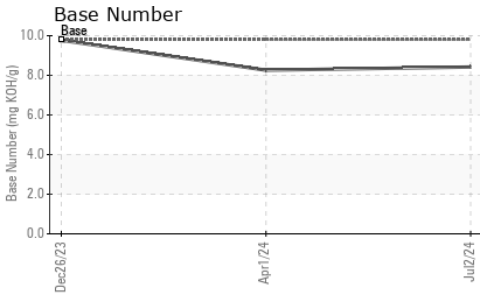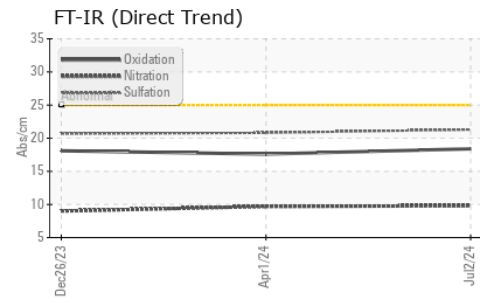

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0123016 **Received** : 08 Jul 2024  
**Lab Number** : 06230368 **Tested** : 09 Jul 2024  
**Unique Number** : 11113861 **Diagnosed** : 09 Jul 2024 - Wes Davis  
**Test Package** : MOB 2

**G LOPES CONSTRUCTION**  
 565 WINTHROP ST  
 TAUNTON, MA  
 US 02780  
 Contact: BUTCH MCGRATH  
 bmcgrath@glopes.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: