



WEAR	NORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 350P 1FF350PAENF000329
 Component
Pump Drive
 Fluid
JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (--- GAL)

RECOMMENDATION

The oil change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0221262	JR0208084	---
Sample Date		Client Info		05 Jul 2024	14 Mar 2024	---
Machine Age	hrs	Client Info		1010	492	---
Oil Age	hrs	Client Info		492	0	---
Filter Age	hrs	Client Info		492	0	---
Oil Changed		Client Info		Changed	Not Changd	---
Filter Changed		Client Info		N/A	Not Changd	---
Sample Status				ABNORMAL	ABNORMAL	---

WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
PQ		ASTM D8184		16	19	---
Iron	ppm	ASTM D5185m	>151	81	55	---
Chromium	ppm	ASTM D5185m	>11	2	1	---
Nickel	ppm	ASTM D5185m	>10	<1	0	---
Titanium	ppm	ASTM D5185m		<1	0	---
Silver	ppm	ASTM D5185m		<1	0	---
Aluminum	ppm	ASTM D5185m	>21	2	2	---
Lead	ppm	ASTM D5185m	>51	<1	0	---
Copper	ppm	ASTM D5185m	>51	5	<1	---
Tin	ppm	ASTM D5185m	>4	<1	<1	---
Vanadium	ppm	ASTM D5185m		<1	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION








Elemental level of silicon (Si) above normal indicating ingress of seal material.

Silicon	ppm	ASTM D5185m	>31	▲ 76	▲ 77	---
Potassium	ppm	ASTM D5185m	>20	4	2	---
Water		WC Method	>0.1	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	2	2	---
Boron	ppm	ASTM D5185m		64	55	---
Barium	ppm	ASTM D5185m		6	6	---
Molybdenum	ppm	ASTM D5185m		109	106	---
Manganese	ppm	ASTM D5185m		5	3	---
Magnesium	ppm	ASTM D5185m		17	14	---
Calcium	ppm	ASTM D5185m		4277	4025	---
Phosphorus	ppm	ASTM D5185m		1127	1138	---
Zinc	ppm	ASTM D5185m		1374	1299	---
Sulfur	ppm	ASTM D5185m		8161	8987	---
Visc @ 40°C	cSt	ASTM D445	117	59.6	62.9	---

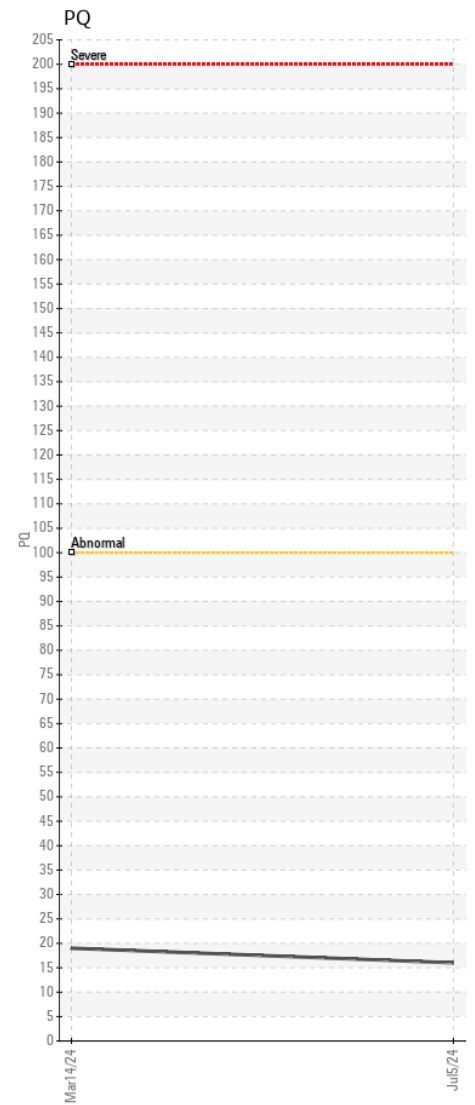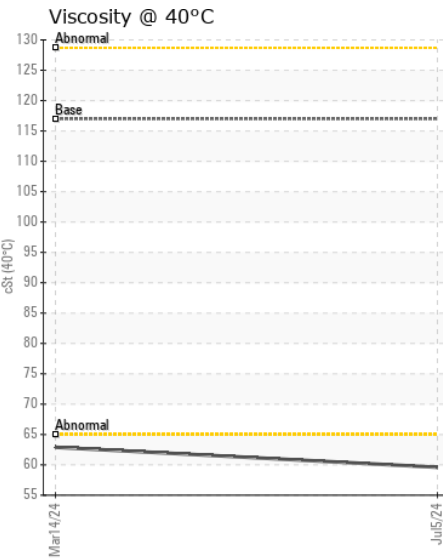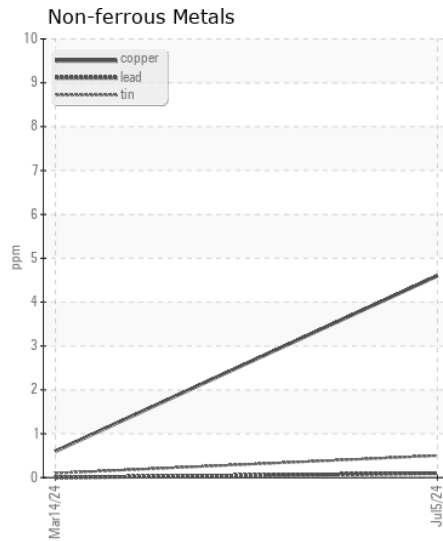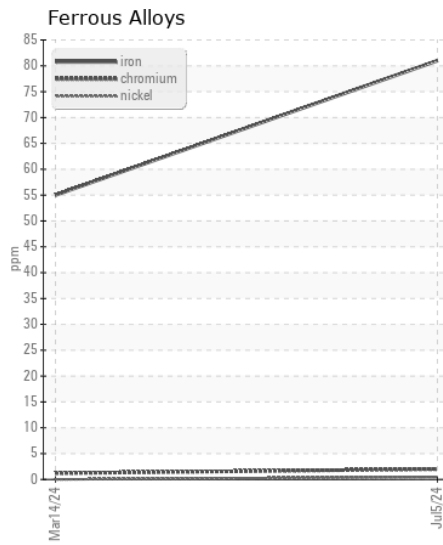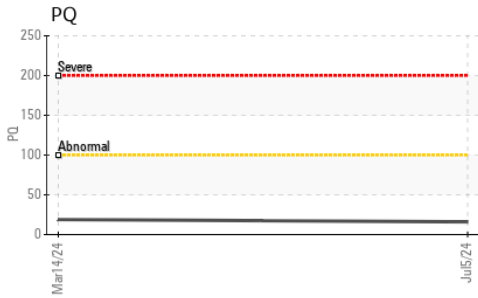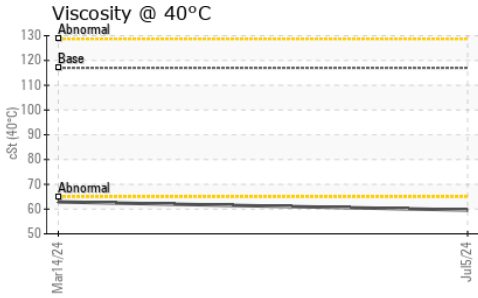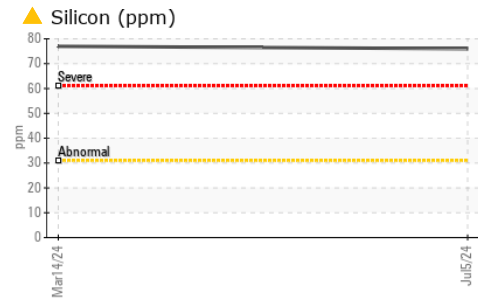

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0221262 **Received** : 08 Jul 2024
Lab Number : 06230416 **Tested** : 09 Jul 2024
Unique Number : 11113909 **Diagnosed** : 10 Jul 2024 - Don Baldrige
Test Package : CONST (Additional Tests: PQ)

HERITAGE SITE DEVELOPMENT
 26 CATTLEMANS DR
 BERRYVILLE, VA
 US 20134
 Contact: SERVICE MANAGER
 dieselpro44@yahoo.com
 T: (540)327-2857
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)