



|                 |               |
|-----------------|---------------|
| WEAR            | <b>NORMAL</b> |
| CONTAMINATION   | <b>NORMAL</b> |
| FLUID CONDITION | <b>NORMAL</b> |

Machine Id  
**JOHN DEERE 700L 1T0700LXLNF414526**  
 Component  
**Left Final Drive**  
 Fluid  
**JOHN DEERE HY-GARD HYD/TRANS (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

| Test           | UOM | Method      | Limit/Abn | Current            | History1    | History2    |
|----------------|-----|-------------|-----------|--------------------|-------------|-------------|
| Sample Number  |     | Client Info |           | <b>JR0218896</b>   | JR0165871   | JR0147306   |
| Sample Date    |     | Client Info |           | <b>01 Jul 2024</b> | 03 May 2023 | 28 Sep 2022 |
| Machine Age    | hrs | Client Info |           | <b>0</b>           | 1944        | 940         |
| Oil Age        | hrs | Client Info |           | <b>0</b>           | 0           | 940         |
| Filter Age     | hrs | Client Info |           | <b>0</b>           | 0           | 0           |
| Oil Changed    |     | Client Info |           | <b>N/A</b>         | Changed     | Changed     |
| Filter Changed |     | Client Info |           | <b>N/A</b>         | N/A         | N/A         |
| Sample Status  |     |             |           | <b>NORMAL</b>      | NORMAL      | NORMAL      |

### WEAR

All component wear rates are normal.

|              |        |             |       |              |      |      |
|--------------|--------|-------------|-------|--------------|------|------|
| PQ           |        | ASTM D8184  | >1250 | <b>54</b>    | 40   | 45   |
| Iron         | ppm    | ASTM D5185m | >750  | <b>102</b>   | 63   | 133  |
| Chromium     | ppm    | ASTM D5185m | >9    | <b>2</b>     | 2    | 3    |
| Nickel       | ppm    | ASTM D5185m | >10   | <b>&lt;1</b> | <1   | 0    |
| Titanium     | ppm    | ASTM D5185m |       | <b>2</b>     | <1   | <1   |
| Silver       | ppm    | ASTM D5185m |       | <b>&lt;1</b> | 0    | 0    |
| Aluminum     | ppm    | ASTM D5185m | >40   | <b>26</b>    | 3    | 9    |
| Lead         | ppm    | ASTM D5185m | >15   | <b>&lt;1</b> | 0    | <1   |
| Copper       | ppm    | ASTM D5185m | >40   | <b>&lt;1</b> | <1   | <1   |
| Tin          | ppm    | ASTM D5185m | >10   | <b>&lt;1</b> | 0    | 0    |
| Vanadium     | ppm    | ASTM D5185m |       | <b>&lt;1</b> | <1   | <1   |
| White Metal  | scalar | *Visual     | NONE  | <b>NONE</b>  | NONE | NONE |
| Yellow Metal | scalar | *Visual     | NONE  | <b>NONE</b>  | NONE | NONE |

### CONTAMINATION







There is no indication of any contamination in the oil.

|                  |        |             |        |              |       |       |
|------------------|--------|-------------|--------|--------------|-------|-------|
| Silicon          | ppm    | ASTM D5185m | >75    | <b>64</b>    | 13    | 34    |
| Potassium        | ppm    | ASTM D5185m | >20    | <b>4</b>     | 2     | 12    |
| Water            |        | WC Method   | >0.075 | <b>NEG</b>   | NEG   | NEG   |
| Silt             | scalar | *Visual     | NONE   | <b>MODER</b> | NONE  | NONE  |
| Debris           | scalar | *Visual     | NONE   | <b>NONE</b>  | NONE  | NONE  |
| Sand/Dirt        | scalar | *Visual     | NONE   | <b>NONE</b>  | NONE  | NONE  |
| Appearance       | scalar | *Visual     | NORML  | <b>NORML</b> | NORML | NORML |
| Odor             | scalar | *Visual     | NORML  | <b>NORML</b> | NORML | NORML |
| Emulsified Water | scalar | *Visual     | >0.075 | <b>NEG</b>   | NEG   | NEG   |

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

|             |     |             |      |             |      |      |
|-------------|-----|-------------|------|-------------|------|------|
| Sodium      | ppm | ASTM D5185m | >51  | <b>0</b>    | 2    | 2    |
| Boron       | ppm | ASTM D5185m | 6    | <b>6</b>    | <1   | 2    |
| Barium      | ppm | ASTM D5185m | 0    | <b>0</b>    | 0    | 0    |
| Molybdenum  | ppm | ASTM D5185m | 0    | <b>7</b>    | 2    | 2    |
| Manganese   | ppm | ASTM D5185m |      | <b>2</b>    | 1    | 3    |
| Magnesium   | ppm | ASTM D5185m | 145  | <b>126</b>  | 102  | 95   |
| Calcium     | ppm | ASTM D5185m | 3570 | <b>3433</b> | 3431 | 3394 |
| Phosphorus  | ppm | ASTM D5185m | 1290 | <b>968</b>  | 1029 | 1020 |
| Zinc        | ppm | ASTM D5185m | 1640 | <b>1262</b> | 1276 | 1195 |
| Sulfur      | ppm | ASTM D5185m |      | <b>3681</b> | 4361 | 3812 |
| Visc @ 40°C | cSt | ASTM D445   | 57.0 | <b>53.1</b> | 51.0 | 50.7 |

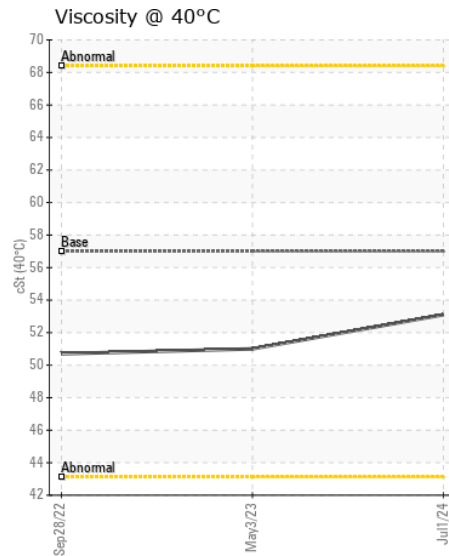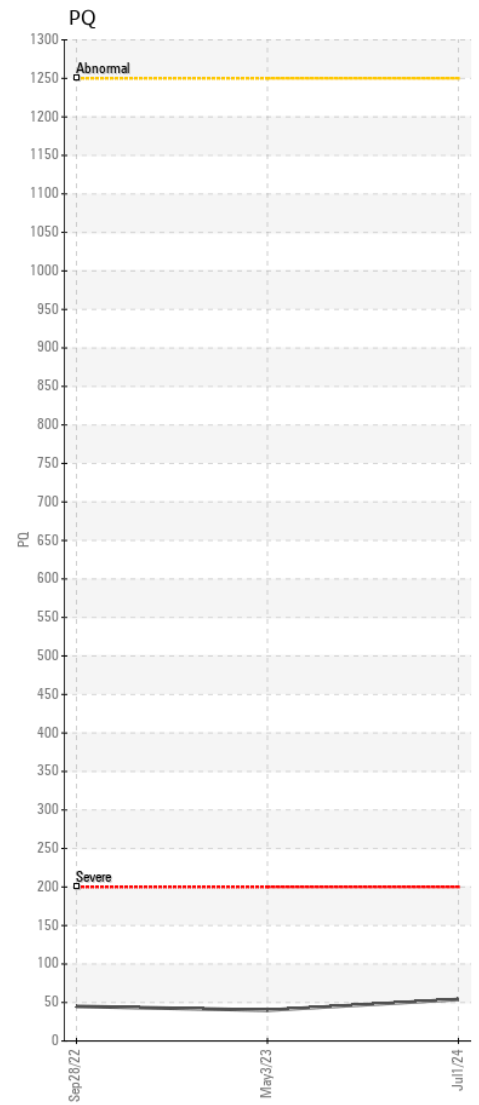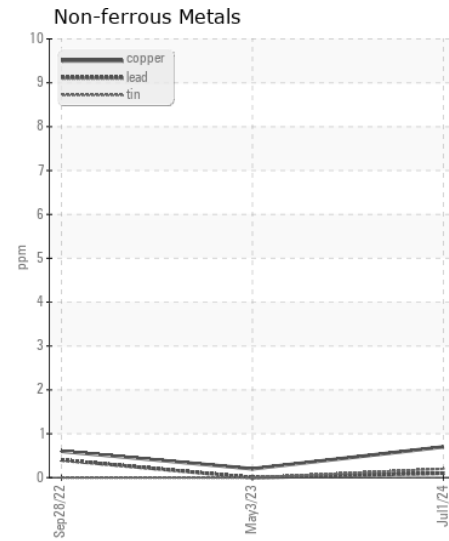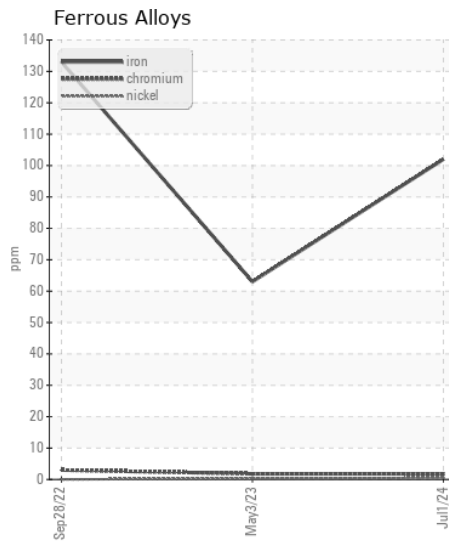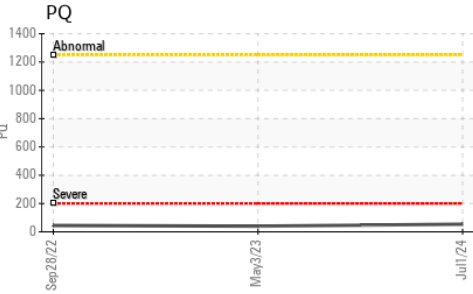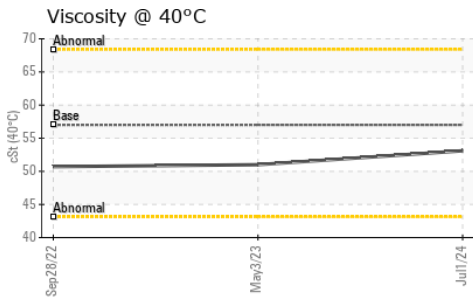

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513

**Sample No.** : JR0218896

**Lab Number** : 06230435

**Unique Number** : 11113928

**Test Package** : CONST ( Additional Tests: PQ )

**Received** : 08 Jul 2024

**Tested** : 09 Jul 2024

**Diagnosed** : 10 Jul 2024 - Don Baldridge

**JRE - ASHEVILLE**

101 BRUCE DRIVE

ASHEVILLE, NC

US 28806

Contact: Randy Warren

randy.warren@jamesriverequipment.com

T: (528)667-0176

F: (828)667-4865

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)