



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
Store 2 - Beaver [RO#152003]
Machine Id
JOHN DEERE 904P 1DW904PALPLX07507
Component
Transmission (Manual)
Fluid
JOHN DEERE HY-GARD HYD/TRANS (7 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LEC0051166	LEC0047646	---
Sample Date		Client Info		02 Jul 2024	30 Jan 2024	---
Machine Age	hrs	Client Info		1584	585	---
Oil Age	hrs	Client Info		1584	585	---
Filter Age	hrs	Client Info		1584	585	---
Oil Changed		Client Info		Not Changd	Not Changd	---
Filter Changed		Client Info		Not Changd	Not Changd	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>95	25	16	---
Iron	ppm	ASTM D5185m	>200	45	15	---
Chromium	ppm	ASTM D5185m	>5	0	0	---
Nickel	ppm	ASTM D5185m	>5	0	0	---
Titanium	ppm	ASTM D5185m		0	0	---
Silver	ppm	ASTM D5185m	>7	<1	0	---
Aluminum	ppm	ASTM D5185m	>25	1	<1	---
Lead	ppm	ASTM D5185m	>45	1	<1	---
Copper	ppm	ASTM D5185m	>225	9	6	---
Tin	ppm	ASTM D5185m	>10	0	0	---
Vanadium	ppm	ASTM D5185m		0	<1	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION







There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>125	8	6	---
Potassium	ppm	ASTM D5185m	>20	2	2	---
Water		WC Method	>0.1	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	---

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		42	43	---
Boron	ppm	ASTM D5185m	6	0	<1	---
Barium	ppm	ASTM D5185m	0	0	0	---
Molybdenum	ppm	ASTM D5185m	0	<1	1	---
Manganese	ppm	ASTM D5185m		2	<1	---
Magnesium	ppm	ASTM D5185m	145	92	88	---
Calcium	ppm	ASTM D5185m	3570	3325	3073	---
Phosphorus	ppm	ASTM D5185m	1290	1149	1009	---
Zinc	ppm	ASTM D5185m	1640	1252	1207	---
Sulfur	ppm	ASTM D5185m		4637	3419	---
Visc @ 40°C	cSt	ASTM D445	57.0	40.7	41.5	---

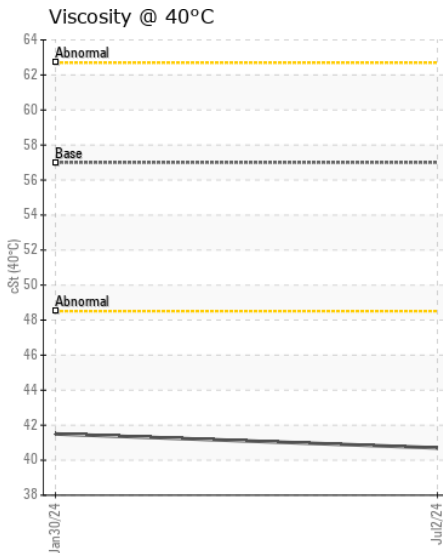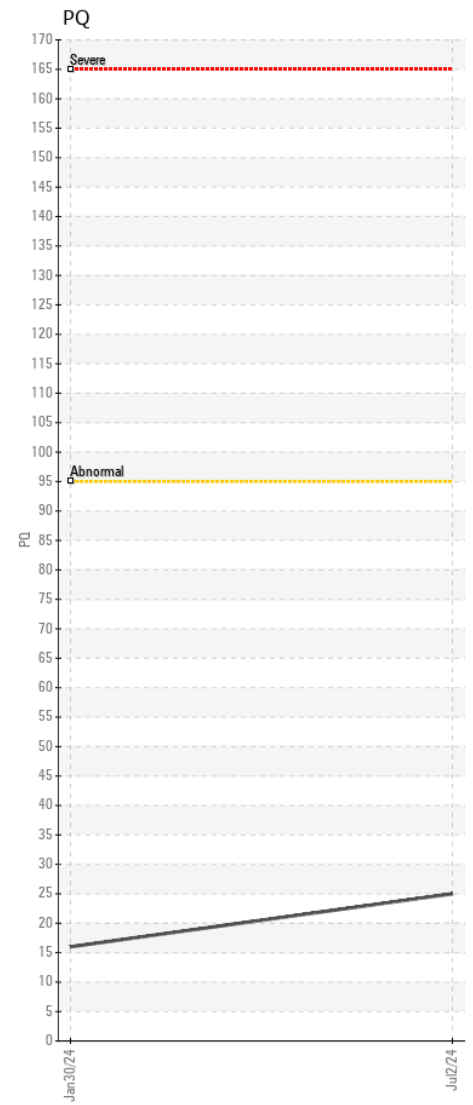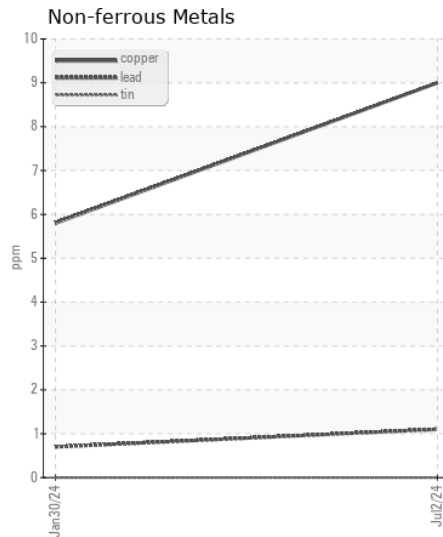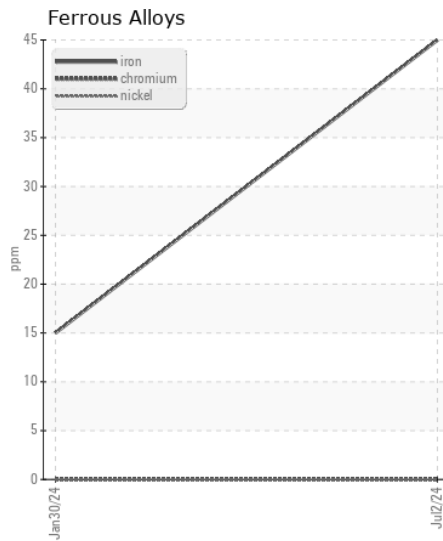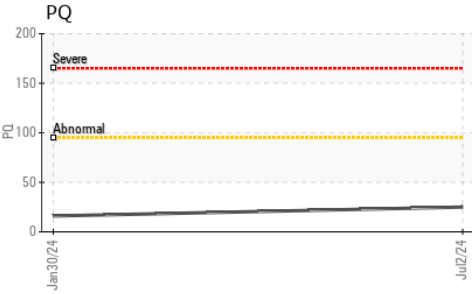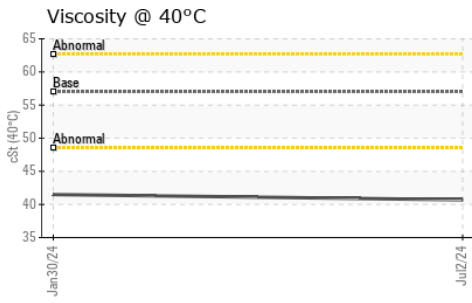

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LEC0051166 **Received** : 08 Jul 2024
Lab Number : 06230471 **Tested** : 10 Jul 2024
Unique Number : 11113964 **Diagnosed** : 10 Jul 2024 - Wes Davis
Test Package : CONST (Additional Tests: PQ)

LESLIE EQUIPMENT COMPANY
 105 TENNIS CENTER DR.
 MARIETTA, OH
 US 45750-9765
 Contact: LEANNE KENDALL
 KendalLeanne@lec1.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: (740)373-5570