



# ASCENDUM

## OIL ANALYSIS REPORT

WEAR  
CONTAMINATION  
FLUID CONDITION

**ATTENTION**  
**ABNORMAL**  
**NORMAL**



Machine Id  
**VOLVO A30D 14058**  
Component  
**Drop Box**  
Fluid  
**GEAR OIL SAE 80W140 (--- GAL)**

### RECOMMENDATION

We advise that you check all areas where dirt can enter the system. The oil change at the time of sampling has been noted. Resample at the next service interval to monitor.

### WEAR

All component wear rates are normal.







### CONTAMINATION

Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress.

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ASC0004493	---	---
Sample Date		Client Info		03 Jul 2024	---	---
Machine Age	hrs	Client Info		10297	---	---
Oil Age	hrs	Client Info		10297	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				ABNORMAL	---	---
Iron	ppm	ASTM D5185m	>500	119	---	---
Chromium	ppm	ASTM D5185m	>20	2	---	---
Nickel	ppm	ASTM D5185m	>10	<1	---	---
Titanium	ppm	ASTM D5185m		1	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>30	12	---	---
Lead	ppm	ASTM D5185m	>30	<1	---	---
Copper	ppm	ASTM D5185m	>30	9	---	---
Tin	ppm	ASTM D5185m	>20	<1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Silicon	ppm	ASTM D5185m	>50	52	---	---
Potassium	ppm	ASTM D5185m	>20	6	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---
Sodium	ppm	ASTM D5185m		5	---	---
Boron	ppm	ASTM D5185m	400	205	---	---
Barium	ppm	ASTM D5185m	200	0	---	---
Molybdenum	ppm	ASTM D5185m	12	0	---	---
Manganese	ppm	ASTM D5185m		2	---	---
Magnesium	ppm	ASTM D5185m	12	7	---	---
Calcium	ppm	ASTM D5185m	150	48	---	---
Phosphorus	ppm	ASTM D5185m	1650	1329	---	---
Zinc	ppm	ASTM D5185m	125	35	---	---
Sulfur	ppm	ASTM D5185m	22500	33410	---	---
Visc @ 40°C	cSt	ASTM D445	263	265	---	---

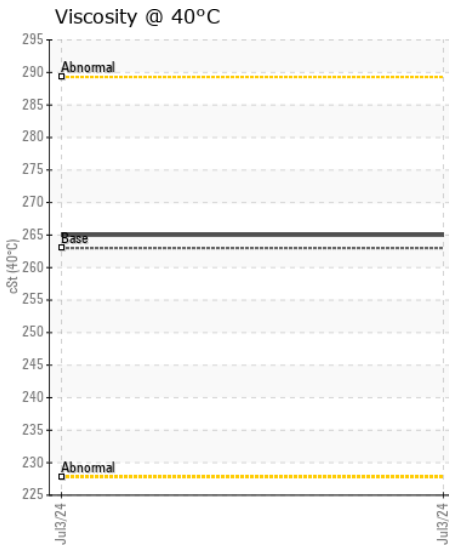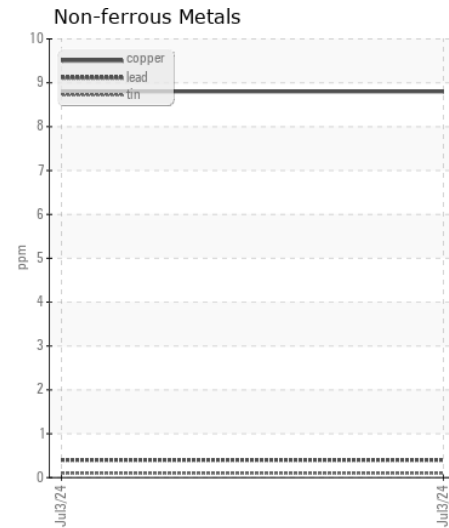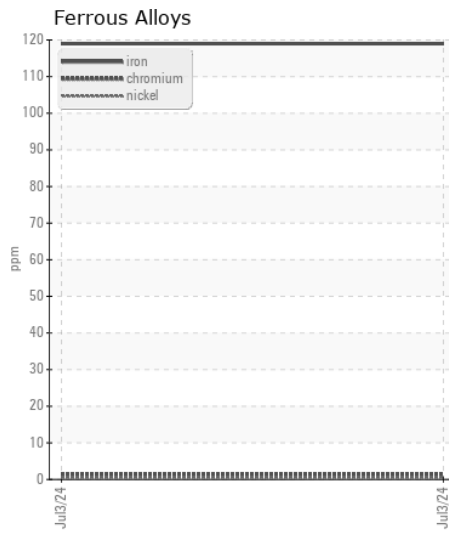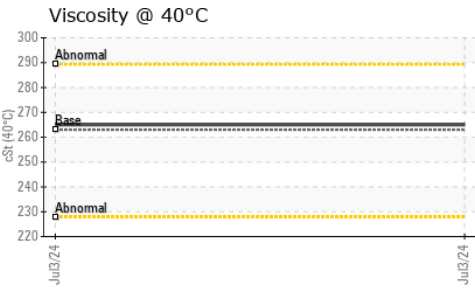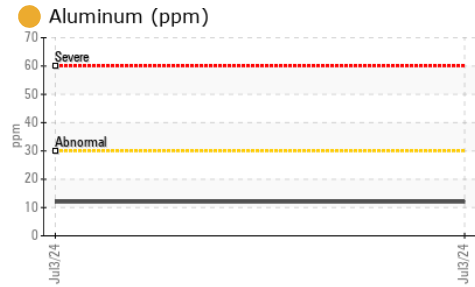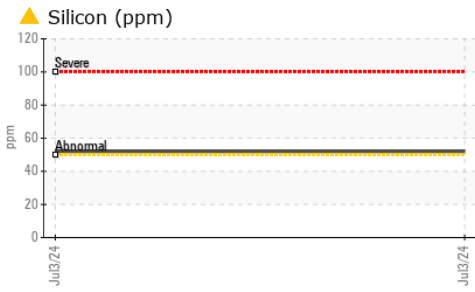

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : ASC0004493  
**Lab Number** : 06230494  
**Unique Number** : 11113987  
**Test Package** : CONST

**Received** : 08 Jul 2024  
**Tested** : 10 Jul 2024  
**Diagnosed** : 10 Jul 2024 - Don Baldrige

**520 - ASCENDUM MACHINERY INC - KNOXVILLE**  
 5730 RUTLEDGE PIKE  
 KNOXVILLE, TN  
 US 37924

Contact: BRANDON GRANT  
 brandon.grant@ascendummachinery.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (865)525-1845  
 F: (865)525-0251