



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 135G 4008
Component
Left Final Drive
Fluid
GEAR OIL SAE 80W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		CL0005615	CL0004501	---
Sample Date		Client Info		25 Jun 2024	20 Jul 2023	---
Machine Age	hrs	Client Info		1092	525	---
Oil Age	hrs	Client Info		0	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Not Changd	---
Filter Changed		Client Info		N/A	N/A	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>750	66	58	---
Chromium	ppm	ASTM D5185m	>9	1	1	---
Nickel	ppm	ASTM D5185m	>10	0	0	---
Titanium	ppm	ASTM D5185m		<1	<1	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>40	<1	<1	---
Lead	ppm	ASTM D5185m	>15	<1	0	---
Copper	ppm	ASTM D5185m	>40	2	<1	---
Tin	ppm	ASTM D5185m	>10	0	0	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	26	24	---
Potassium	ppm	ASTM D5185m	>20	5	2	---
Water		WC Method	>0.075	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.075	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>170	2	<1	---
Boron	ppm	ASTM D5185m	400	53	68	---
Barium	ppm	ASTM D5185m	200	3	<1	---
Molybdenum	ppm	ASTM D5185m	12	0	0	---
Manganese	ppm	ASTM D5185m		2	1	---
Magnesium	ppm	ASTM D5185m	12	<1	0	---
Calcium	ppm	ASTM D5185m	150	39	9	---
Phosphorus	ppm	ASTM D5185m	1650	566	554	---
Zinc	ppm	ASTM D5185m	125	66	35	---
Sulfur	ppm	ASTM D5185m	22500	19352	18772	---
Visc @ 40°C	cSt	ASTM D445	143	185	186	---

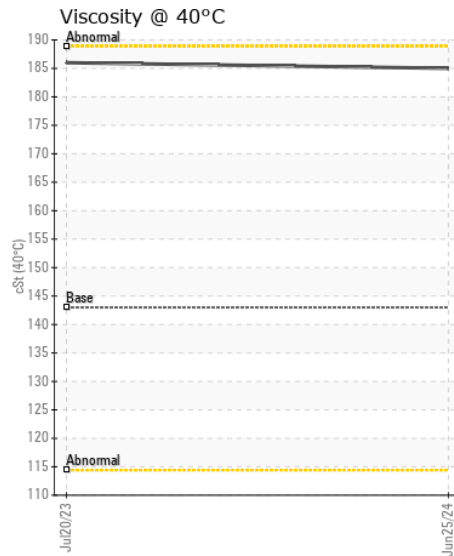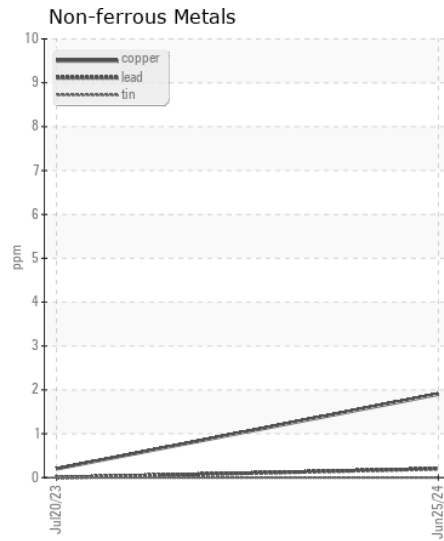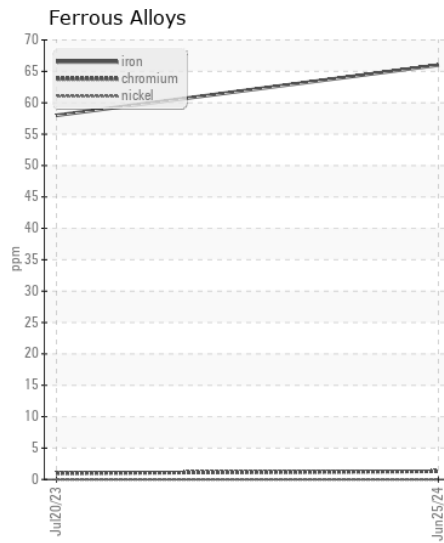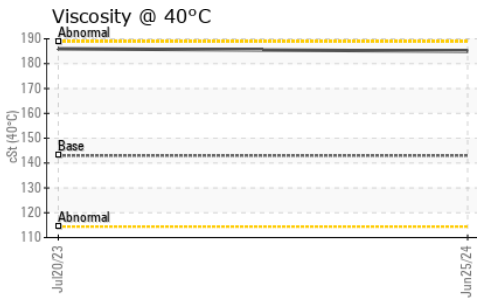

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : CL0005615
Lab Number : 06230606
Unique Number : 11114099
Test Package : CONST
Received : 08 Jul 2024
Tested : 10 Jul 2024
Diagnosed : 10 Jul 2024 - Wes Davis

BAKER AR
 8819 COLUMBUS RD
 DAVIDSON, NC
 US 28036
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: