



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**JOHN DEERE 135G 4008**  
Component  
**Swing Drive**  
Fluid  
**GEAR OIL SAE 80W90 (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>CL0005617</b>	CL0004504	---
Sample Date		Client Info		<b>25 Jun 2024</b>	20 Jul 2023	---
Machine Age	hrs	Client Info		<b>1092</b>	525	---
Oil Age	hrs	Client Info		<b>0</b>	0	---
Filter Age	hrs	Client Info		<b>0</b>	0	---
Oil Changed		Client Info		<b>Not Changd</b>	Not Changd	---
Filter Changed		Client Info		<b>N/A</b>	N/A	---
Sample Status				<b>NORMAL</b>	NORMAL	---

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>151	<b>137</b>	106	---
Chromium	ppm	ASTM D5185m	>11	<b>1</b>	<1	---
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	0	---
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	---
Silver	ppm	ASTM D5185m		<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>21	<b>1</b>	<1	---
Lead	ppm	ASTM D5185m	>51	<b>&lt;1</b>	0	---
Copper	ppm	ASTM D5185m	>51	<b>2</b>	<1	---
Tin	ppm	ASTM D5185m	>10	<b>0</b>	0	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

**CONTAMINATION**





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>31	<b>30</b>	26	---
Potassium	ppm	ASTM D5185m	>20	<b>5</b>	2	---
Water		WC Method	>0.1	<b>NEG</b>	NEG	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	---

**FLUID CONDITION**

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>170	<b>2</b>	<1	---
Boron	ppm	ASTM D5185m	400	<b>42</b>	54	---
Barium	ppm	ASTM D5185m	200	<b>8</b>	5	---
Molybdenum	ppm	ASTM D5185m	12	<b>0</b>	0	---
Manganese	ppm	ASTM D5185m		<b>4</b>	3	---
Magnesium	ppm	ASTM D5185m	12	<b>1</b>	0	---
Calcium	ppm	ASTM D5185m	150	<b>33</b>	8	---
Phosphorus	ppm	ASTM D5185m	1650	<b>553</b>	544	---
Zinc	ppm	ASTM D5185m	125	<b>30</b>	11	---
Sulfur	ppm	ASTM D5185m	22500	<b>19560</b>	18588	---
Visc @ 40°C	cSt	ASTM D445	143	<b>186</b>	186	---

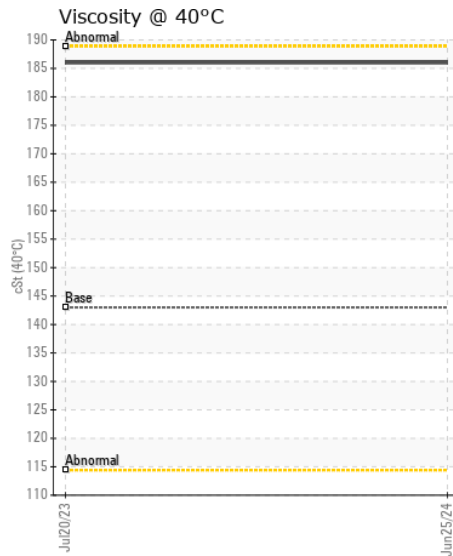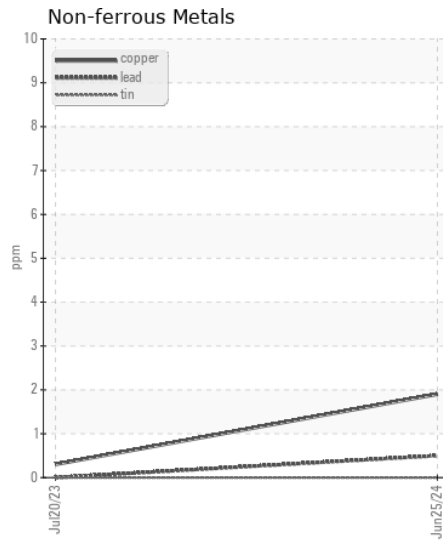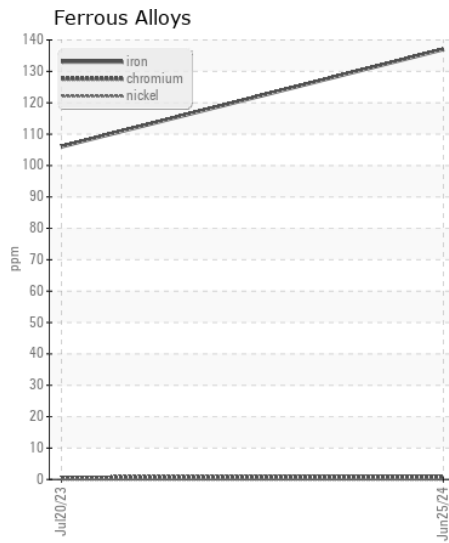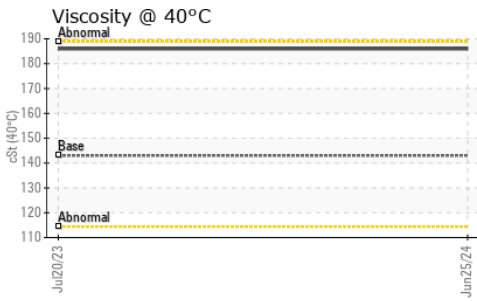

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : CL0005617  
**Lab Number** : 06230621  
**Unique Number** : 11114114  
**Test Package** : CONST  
**Received** : 08 Jul 2024  
**Tested** : 10 Jul 2024  
**Diagnosed** : 10 Jul 2024 - Wes Davis

**BAKER AR**  
 8819 COLUMBUS RD  
 DAVIDSON, NC  
 US 28036  
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: