



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	NORMAL



Machine Id
VOLVO A25G 740250
Component
Transmission (Auto)
Fluid
VOLVO AUTOMATIC TRANSMISSION FLUID AT102 (--- GAL)

RECOMMENDATION

The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP440816	VCP446511	VCP437586
Sample Date		Client Info		28 Jun 2024	22 Apr 2024	26 Feb 2024
Machine Age	hrs	Client Info		6651	6403	6109
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changed	Not Changed	Not Changed
Filter Changed		Client Info		Changed	Not Changed	Not Changed
Sample Status				ABNORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>160	53	42	46
Chromium	ppm	ASTM D5185m	>5	<1	0	0
Nickel	ppm	ASTM D5185m	>5	3	2	3
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m	>5	<1	0	0
Aluminum	ppm	ASTM D5185m	>50	16	14	15
Lead	ppm	ASTM D5185m	>50	<1	0	0
Copper	ppm	ASTM D5185m	>225	24	19	20
Tin	ppm	ASTM D5185m	>10	4	2	3
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION










Moderate concentration of visible dirt/debris present in the fluid.

Silicon	ppm	ASTM D5185m	>20	6	5	6
Potassium	ppm	ASTM D5185m	>20	3	2	1
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	▲ MODER	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		5	7	6
Boron	ppm	ASTM D5185m	187	79	78	72
Barium	ppm	ASTM D5185m	0.0	0	0	0
Molybdenum	ppm	ASTM D5185m	0.0	<1	0	0
Manganese	ppm	ASTM D5185m	0.0	1	<1	1
Magnesium	ppm	ASTM D5185m	6.8	4	1	1
Calcium	ppm	ASTM D5185m	215	81	89	85
Phosphorus	ppm	ASTM D5185m	445	155	197	193
Zinc	ppm	ASTM D5185m	56	10	6	0
Sulfur	ppm	ASTM D5185m	1336	1689	2109	1862
Visc @ 40°C	cSt	ASTM D445	35.3	27.2	27.2	26.6

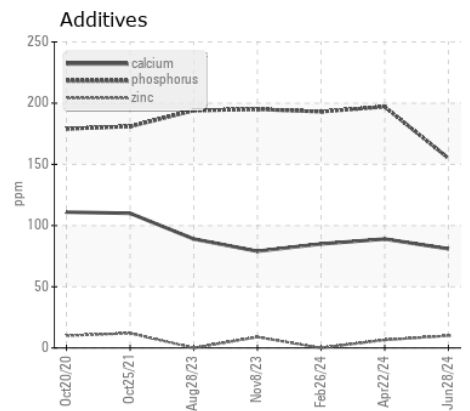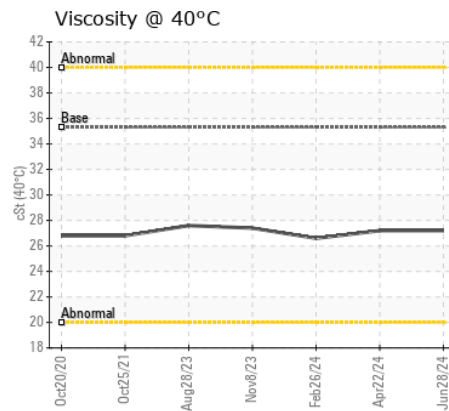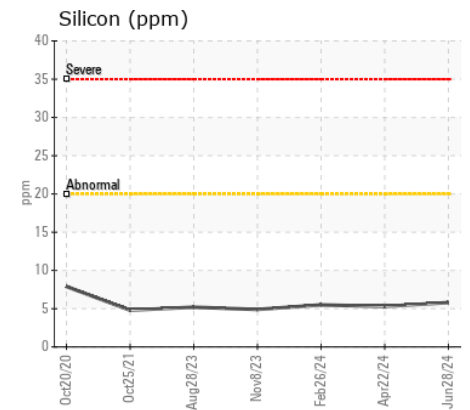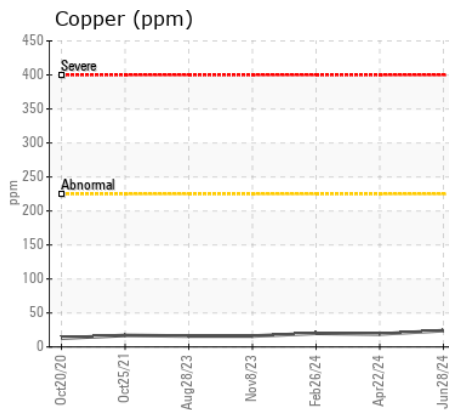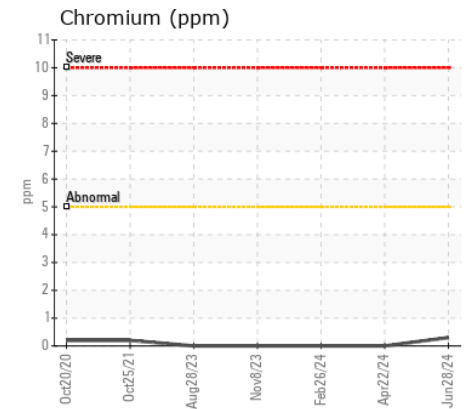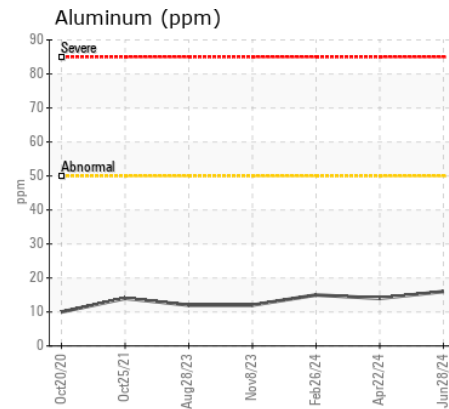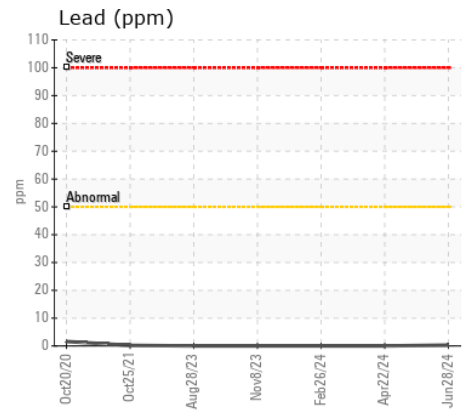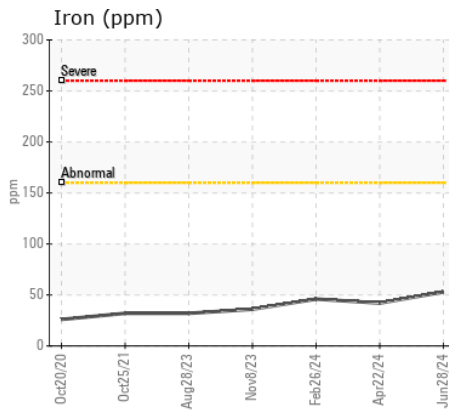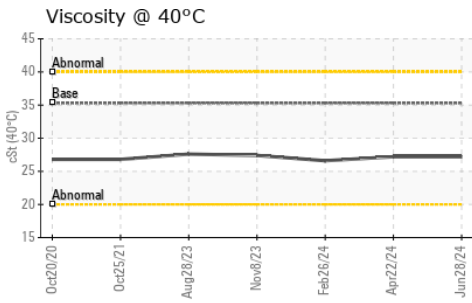

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP440816
Lab Number : 06230656
Unique Number : 11114149
Test Package : MOB 1

Received : 08 Jul 2024
Tested : 09 Jul 2024
Diagnosed : 10 Jul 2024 - Jonathan Hester

ALTA EQUIPMENT COMPANY
 5151 DR MARTIN LUTHER KING BLVD
 FORT MYERS, FL
 US 33905
 Contact: TODD LARK
 tlark@altaequipfl.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
 F: (239)481-3302