



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
KEMP QUARRIES / PRYOR [70967]
Machine Id
OHT129
Component
Hydraulic System
Fluid
PETRO CANADA HYDREX AW 68 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. (Customer Sample Comment: Pm1 performed. All oil samples taken. Engine oil, engine oil filters, fuel filters, air filters, and cabin air filters changed.)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PCA0108890	PCA0086661	---
Sample Date		Client Info		22 Jun 2024	23 Apr 2024	---
Machine Age	hrs	Client Info		15416	15042	---
Oil Age	hrs	Client Info		374	0	---
Filter Age	hrs	Client Info		374	0	---
Oil Changed		Client Info		Oil Added	Changed	---
Filter Changed		Client Info		Not Chngd	Changed	---
Sample Status				NORMAL	MARGINAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>26	14	25	---
Chromium	ppm	ASTM D5185m	>5	<1	0	---
Nickel	ppm	ASTM D5185m	>10	<1	0	---
Titanium	ppm	ASTM D5185m		<1	<1	---
Silver	ppm	ASTM D5185m		<1	0	---
Aluminum	ppm	ASTM D5185m	>11	2	3	---
Lead	ppm	ASTM D5185m	>10	<1	<1	---
Copper	ppm	ASTM D5185m	>31	6	8	---
Tin	ppm	ASTM D5185m	>10	<1	<1	---
Vanadium	ppm	ASTM D5185m		<1	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>21	10	17	---
Potassium	ppm	ASTM D5185m	>20	2	2	---
Water		WC Method	>0.1	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	▲ MODER	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		0	2	---
Boron	ppm	ASTM D5185m	0	3	8	---
Barium	ppm	ASTM D5185m	0	0	<1	---
Molybdenum	ppm	ASTM D5185m	0	2	2	---
Manganese	ppm	ASTM D5185m	0	<1	<1	---
Magnesium	ppm	ASTM D5185m	0	18	35	---
Calcium	ppm	ASTM D5185m	50	1607	3034	---
Phosphorus	ppm	ASTM D5185m	330	534	826	---
Zinc	ppm	ASTM D5185m	430	759	1035	---
Sulfur	ppm	ASTM D5185m	760	2295	4226	---
Visc @ 40°C	cSt	ASTM D445	67.4	48.5	37.2	---

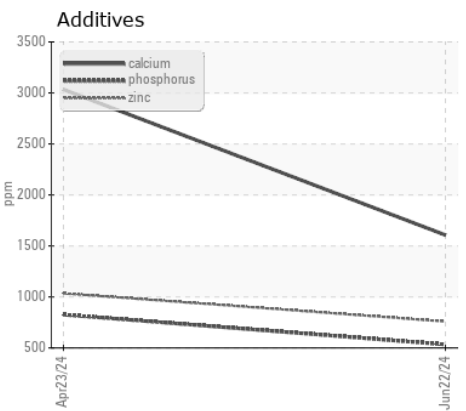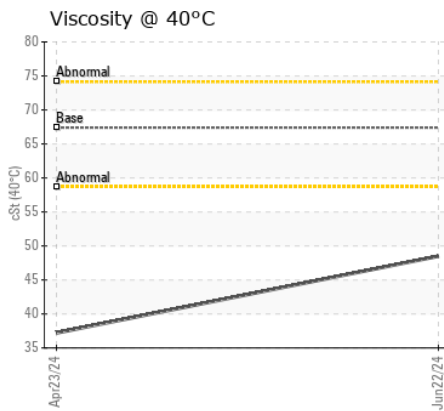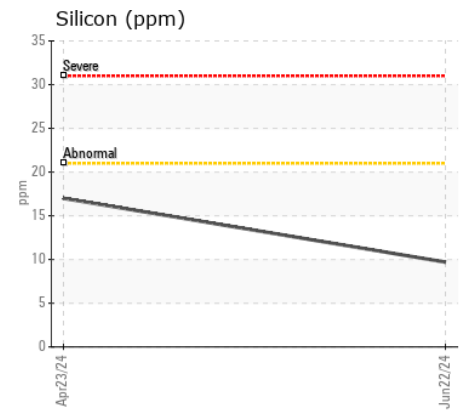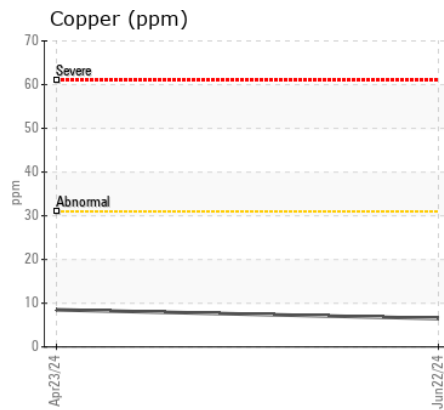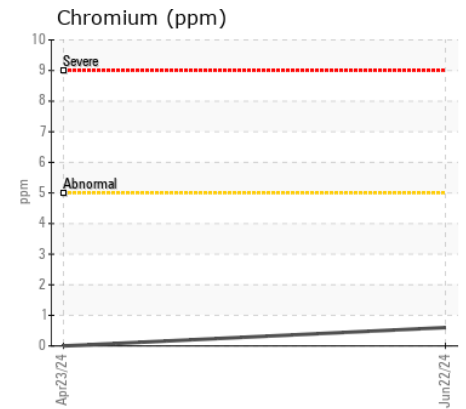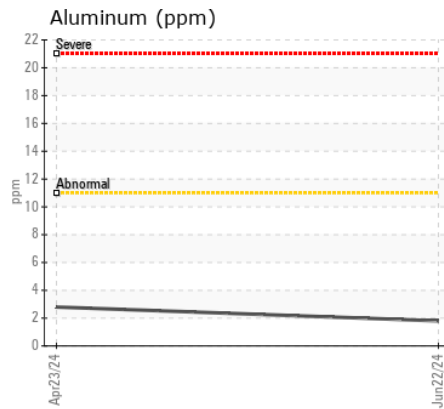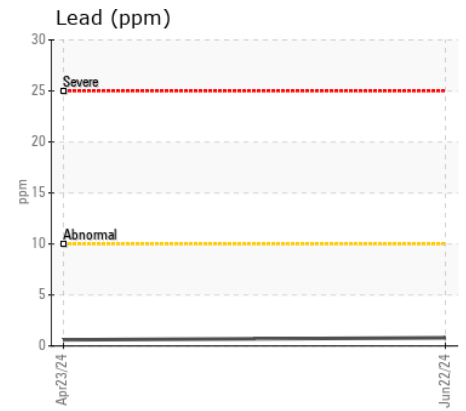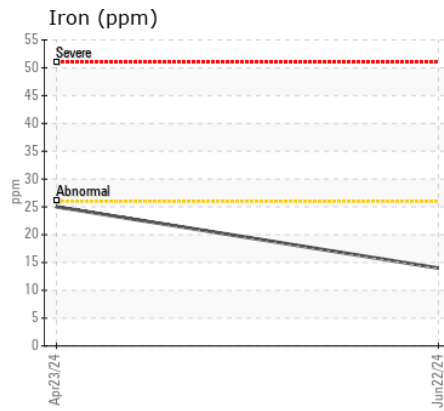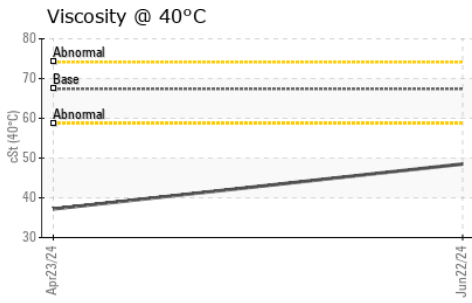

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : PCA0108890
 Lab Number : 06230688
 Unique Number : 11114181
 Test Package : MOB 1

Received : 08 Jul 2024
 Tested : 09 Jul 2024
 Diagnosed : 10 Jul 2024 - Jonathan Hester

Kemp Quarries - Pryor Stone - Pryor
 1050 E 520 Rd
 Pryor, OK
 US 74361
 Contact:
 pryor@pryorstone.com
 T:
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)