



WEAR	ABNORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
EILEEN BIGELOW
Machine Id
[EILEEN BIGELOW] 003 588445-3
Component
Starboard Main Engine
Fluid
CHEVRON DELO 710 LE (230 GAL)

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		MW06230907	MW06221855	MW06149598
Sample Date		Client Info		01 Jul 2024	01 Jun 2024	01 Apr 2024
Machine Age	hrs	Client Info		9098	8385	6934
Oil Age	hrs	Client Info		0	8385	336
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				ABNORMAL	NORMAL	NORMAL

WEAR

Moderate concentration of visible metal present. All component wear rates are normal.

Iron	ppm	ASTM D5185m	>75	11	15	11
Chromium	ppm	ASTM D5185m	>8	1	2	1
Nickel	ppm	ASTM D5185m	>2	0	<1	0
Titanium	ppm	ASTM D5185m	>3	<1	<1	0
Silver	ppm	ASTM D5185m	>2	0	<1	0
Aluminum	ppm	ASTM D5185m	>15	2	2	<1
Lead	ppm	ASTM D5185m	>18	3	4	3
Copper	ppm	ASTM D5185m	>80	9	11	10
Tin	ppm	ASTM D5185m	>14	3	5	5
Vanadium	ppm	ASTM D5185m		0	<1	0
White Metal	scalar	*Visual	NONE	▲ MODER	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>20	4	4	3
Potassium	ppm	ASTM D5185m	>20	2	2	<1
Fuel		WC Method	>4.0	<1.0	<1.0	<1.0
Water		WC Method	>0.1	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.5	0.5	0.4
Nitration	Abs/cm	*ASTM D7624	>20	8.2	8.6	8.0
Sulfation	Abs/.1mm	*ASTM D7415	>30	16.2	16.3	16.0
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>75	<1	0	<1
Boron	ppm	ASTM D5185m		39	39	40
Barium	ppm	ASTM D5185m		0	1	0
Molybdenum	ppm	ASTM D5185m		45	50	43
Manganese	ppm	ASTM D5185m		<1	2	<1
Magnesium	ppm	ASTM D5185m		11	10	10
Calcium	ppm	ASTM D5185m		3532	3544	3428
Phosphorus	ppm	ASTM D5185m		12	14	3
Zinc	ppm	ASTM D5185m	10	4	7	0
Sulfur	ppm	ASTM D5185m		2780	2180	2477
Oxidation	Abs/.1mm	*ASTM D7414	>25	8.5	8.7	8.4
Base Number (BN)	mg KOH/g	ASTM D2896	9.2	9.54	9.63	9.39
Visc @ 100°C	cSt	ASTM D445	15.5	15.0	15.0	15.0


FT-IR (Direct Trend)

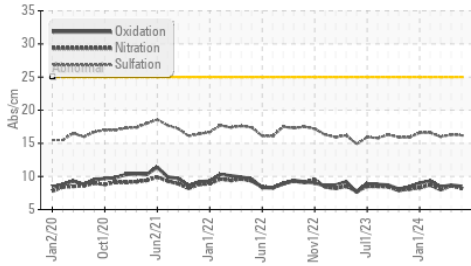


Base Number

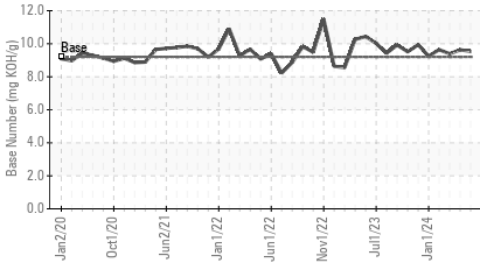


Viscosity @ 100°C

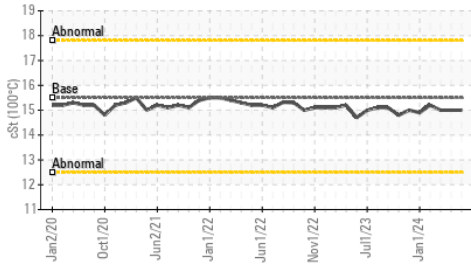


Ferrous Alloys

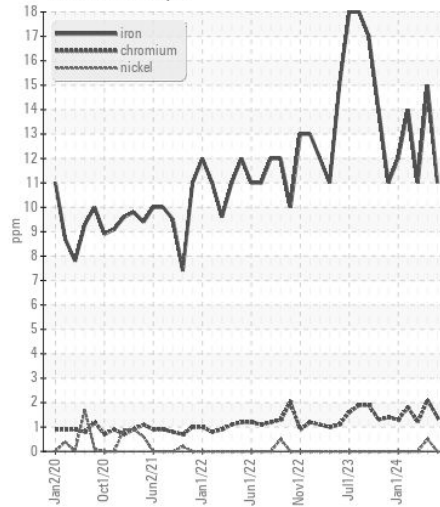


Non-ferrous Metals

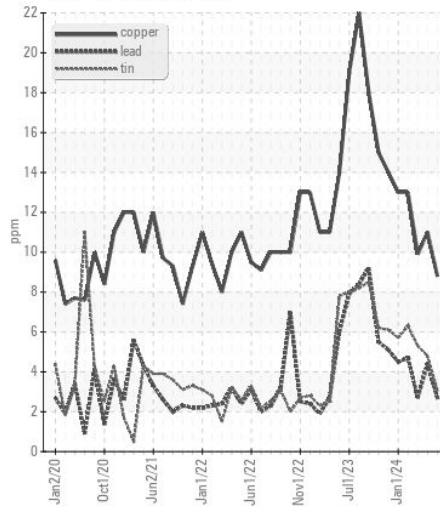

Viscosity @ 100°C

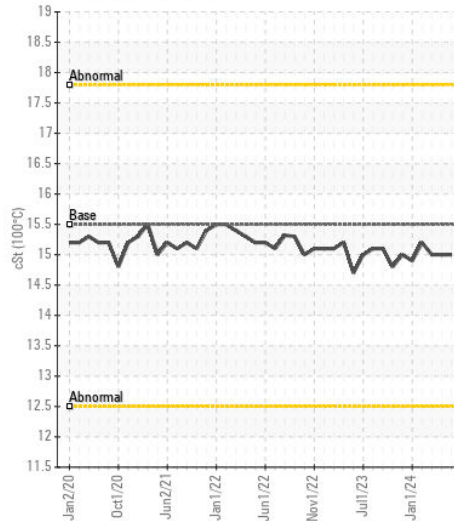

Base Number

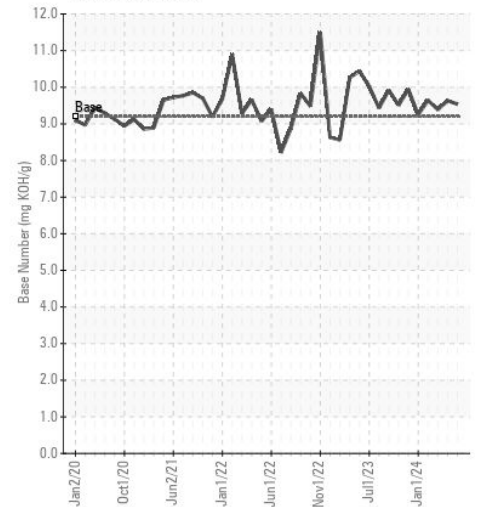

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : MW06230907
Lab Number : 06230907
Unique Number : 11114400
Test Package : MAR 2
Received : 08 Jul 2024
Tested : 10 Jul 2024
Diagnosed : 10 Jul 2024 - Sean Felton

INGRAM BARGE
 900 S 3RD ST
 PADUCAH, KY
 US 42003

Contact: TONY HUCKABEE
 tony.huckabee@ingrambarge.com
 T: (270)415-4467
 F: (615)695-3697

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)