



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
KEMP QUARRIES / RIVER VALLEY BACKBONE

Machine Id
WL079

Component
Front Right Final Drive

Fluid
MOBIL MOBILTRANS HD 50 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PCA0108628	PCA0084792	PCA0085848
Sample Date		Client Info		28 Jun 2024	28 Dec 2023	13 Oct 2023
Machine Age	hrs	Client Info		49459	48609	48226
Oil Age	hrs	Client Info		1200	383	1200
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Not Changd	Changed
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	ABNORMAL	SEVERE

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>800	88	33	48
Chromium	ppm	ASTM D5185m	>10	<1	<1	<1
Nickel	ppm	ASTM D5185m	>5	0	2	2
Titanium	ppm	ASTM D5185m	>15	<1	<1	<1
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>75	3	2	2
Lead	ppm	ASTM D5185m	>10	11	▲ 33	▲ 84
Copper	ppm	ASTM D5185m	>75	57	▲ 159	▲ 431
Tin	ppm	ASTM D5185m	>8	1	▲ 11	▲ 27
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	▲ HEAVY
Yellow Metal	scalar	*Visual	NONE	NONE	▲ HEAVY	NONE

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>400	41	13	18
Potassium	ppm	ASTM D5185m	>20	<1	2	2
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		2	0	0
Boron	ppm	ASTM D5185m		<1	<1	0
Barium	ppm	ASTM D5185m		0	0	9
Molybdenum	ppm	ASTM D5185m		0	2	2
Manganese	ppm	ASTM D5185m		1	<1	<1
Magnesium	ppm	ASTM D5185m		16	19	23
Calcium	ppm	ASTM D5185m		3669	3306	2987
Phosphorus	ppm	ASTM D5185m		970	984	989
Zinc	ppm	ASTM D5185m		1144	1171	1192
Sulfur	ppm	ASTM D5185m		5618	7273	7501
Visc @ 40°C	cSt	ASTM D445	195	182	187	183

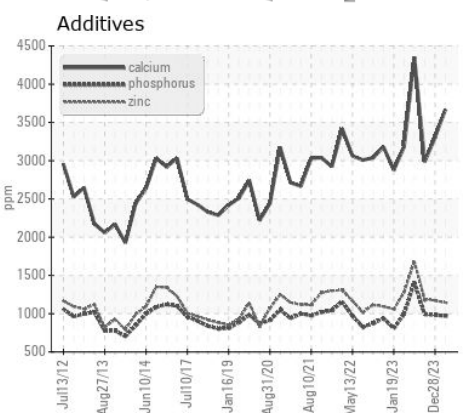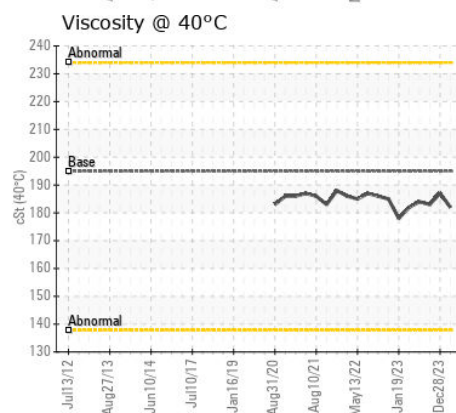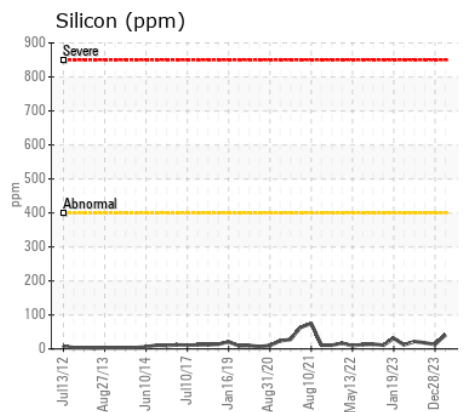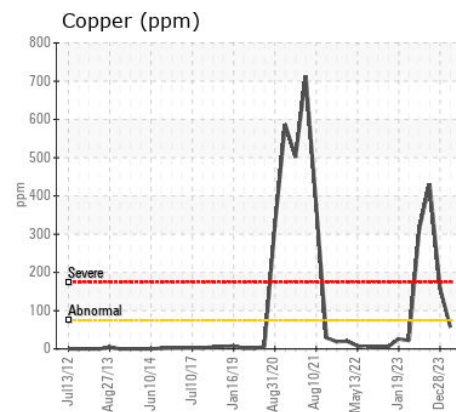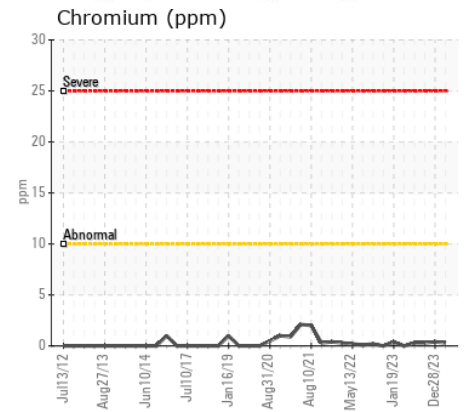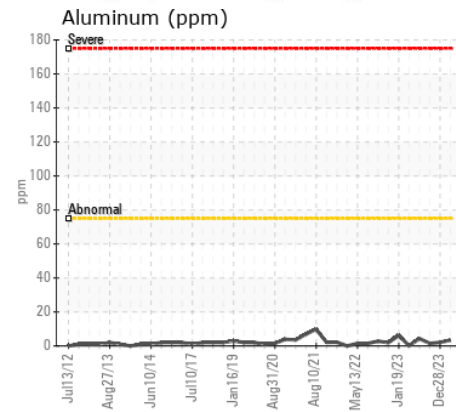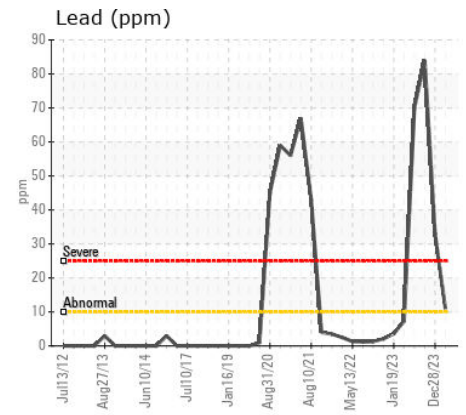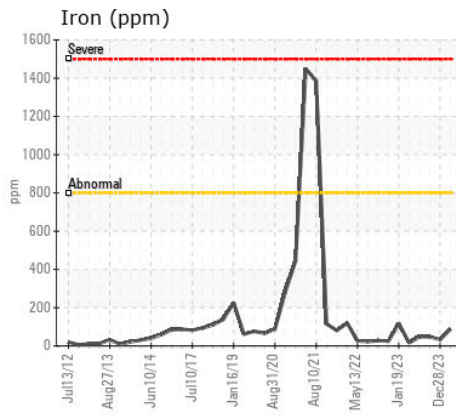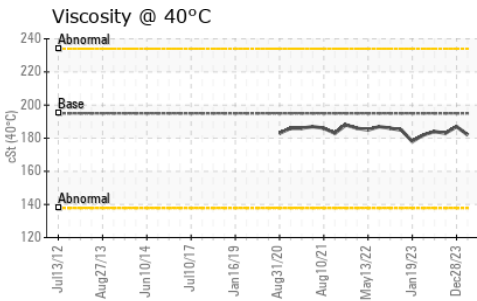

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0108628
Lab Number : 06230926
Unique Number : 11114419
Test Package : MOB 1

Received : 08 Jul 2024
Tested : 10 Jul 2024
Diagnosed : 10 Jul 2024 - Sean Felton

Kemp Quarries - River Valley - Backbone
 5600 S Hwy 253
 Huntington, AR
 US 72940

Contact: backbone@rivervalleyquarries.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: