



# OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id  
**TAKEUCHI TL12 412104262**  
 Component  
**Diesel Engine**  
 Fluid  
**{not provided} (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ML0002337	---	---
Sample Date		Client Info		14 Jun 2024	---	---
Machine Age	hrs	Client Info		1403	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	61	---	---
Chromium	ppm	ASTM D5185m	>20	2	---	---
Nickel	ppm	ASTM D5185m	>4	0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m	>3	0	---	---
Aluminum	ppm	ASTM D5185m	>20	4	---	---
Lead	ppm	ASTM D5185m	>40	<1	---	---
Copper	ppm	ASTM D5185m	>330	14	---	---
Tin	ppm	ASTM D5185m	>15	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

## CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	16	---	---
Potassium	ppm	ASTM D5185m	>20	17	---	---
Fuel		WC Method	>5	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>3	1.6	---	---
Nitration	Abs/cm	*ASTM D7624	>20	14.0	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	25.1	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

## FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		5	---	---
Boron	ppm	ASTM D5185m		22	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		63	---	---
Manganese	ppm	ASTM D5185m		2	---	---
Magnesium	ppm	ASTM D5185m		534	---	---
Calcium	ppm	ASTM D5185m		2134	---	---
Phosphorus	ppm	ASTM D5185m		793	---	---
Zinc	ppm	ASTM D5185m		987	---	---
Sulfur	ppm	ASTM D5185m		2839	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	25.1	---	---
Base Number (BN)	mg KOH/g	ASTM D2896		8.8	---	---
Visc @ 100°C	cSt	ASTM D445		14.1	---	---

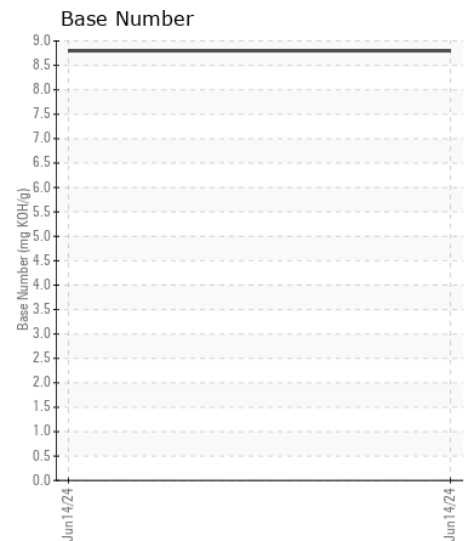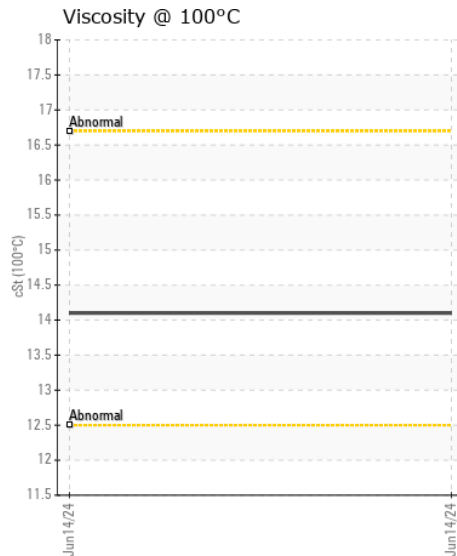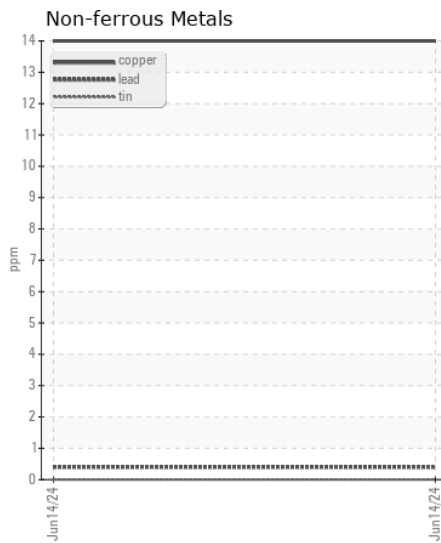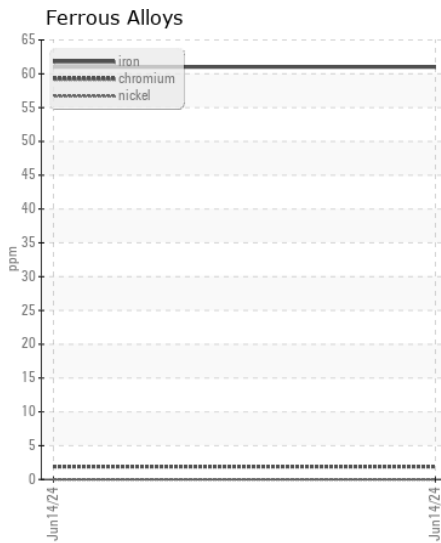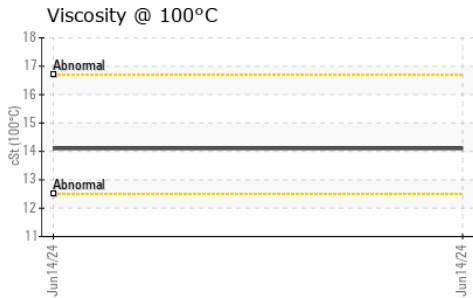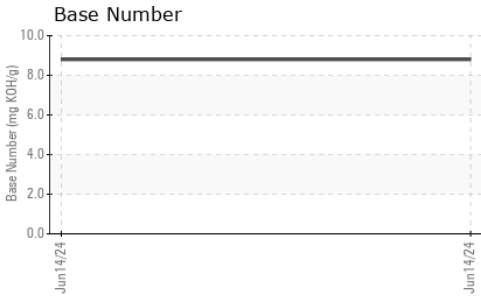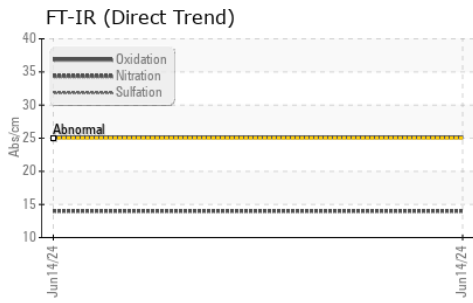

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513

**Sample No.** : ML0002337

**Lab Number** : 06231050

**Unique Number** : 11114543

**Test Package** : CONST ( Additional Tests: TBN )

**Received** : 08 Jul 2024

**Tested** : 10 Jul 2024

**Diagnosed** : 10 Jul 2024 - Don Baldrige

**MCCLUNG-LOGAN EQUIPMENT CO - MANASSAS**

8450 QUARRY ROAD

MANASSAS, VA

US 20110

Contact: MIKE MAYHUGH

MMAYHUGH@MCCLUNG-LOGAN.COM

T: (703)393-7344

F: (703)393-7844

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)