



PacLease

# OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id  
**PETERBILT 8271086**

Component  
**Diesel Engine**

Fluid  
**CHEVRON DELO 400 SAE 10W30 (44 QTS)**

## RECOMMENDATION

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		RPL0004768	---	---
Sample Date		Client Info		13 Jun 2024	---	---
Machine Age	mls	Client Info		49547	---	---
Oil Age	mls	Client Info		49547	---	---
Filter Age	mls	Client Info		49547	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	82	---	---
Chromium	ppm	ASTM D5185m	>20	2	---	---
Nickel	ppm	ASTM D5185m	>4	0	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m	>3	<1	---	---
Aluminum	ppm	ASTM D5185m	>20	77	---	---
Lead	ppm	ASTM D5185m	>40	1	---	---
Copper	ppm	ASTM D5185m	>330	15	---	---
Tin	ppm	ASTM D5185m	>15	2	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

## CONTAMINATION










Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. No other contaminants were detected in the oil.

Silicon	ppm	ASTM D5185m	>25	16	---	---
Potassium	ppm	ASTM D5185m	>20	240	---	---
Fuel		WC Method	>5	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>3	0.4	---	---
Nitration	Abs/cm	*ASTM D7624	>20	12.6	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	28.7	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

## FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		7	---	---
Boron	ppm	ASTM D5185m		14	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		6	---	---
Manganese	ppm	ASTM D5185m		3	---	---
Magnesium	ppm	ASTM D5185m		829	---	---
Calcium	ppm	ASTM D5185m		1511	---	---
Phosphorus	ppm	ASTM D5185m	1260	890	---	---
Zinc	ppm	ASTM D5185m	1400	1002	---	---
Sulfur	ppm	ASTM D5185m		3872	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	25.4	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	10.1	4.2	---	---
Visc @ 100°C	cSt	ASTM D445	11.1	12.4	---	---

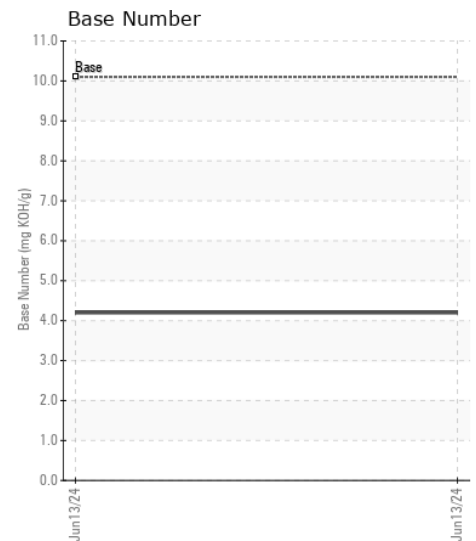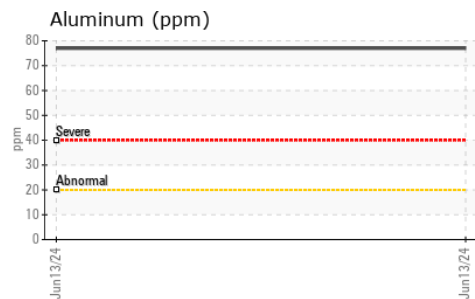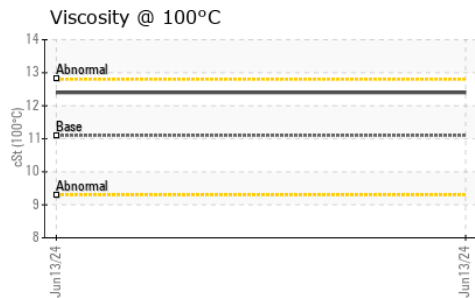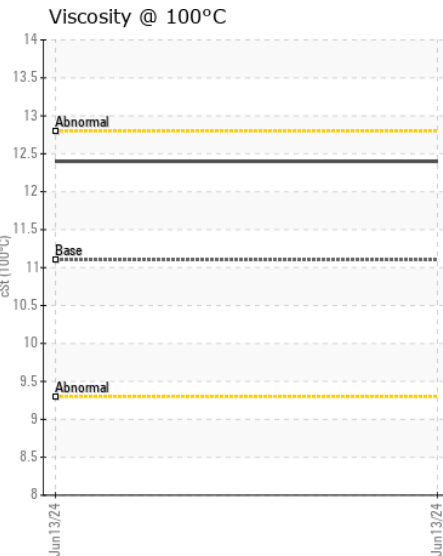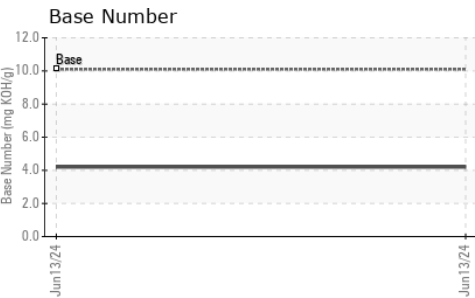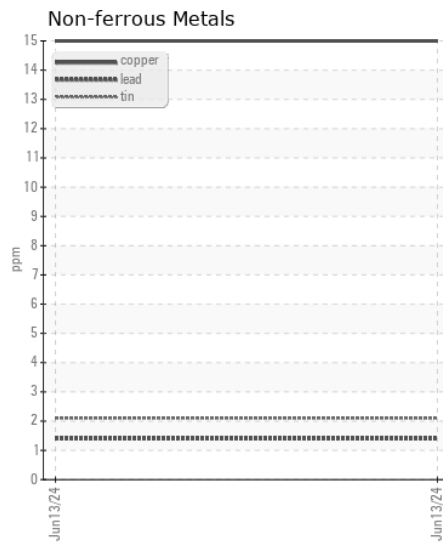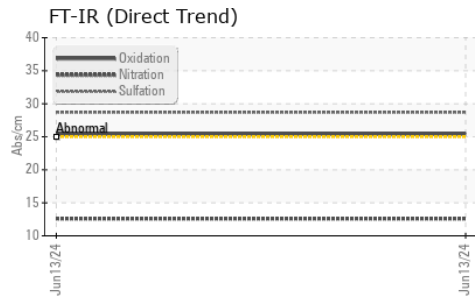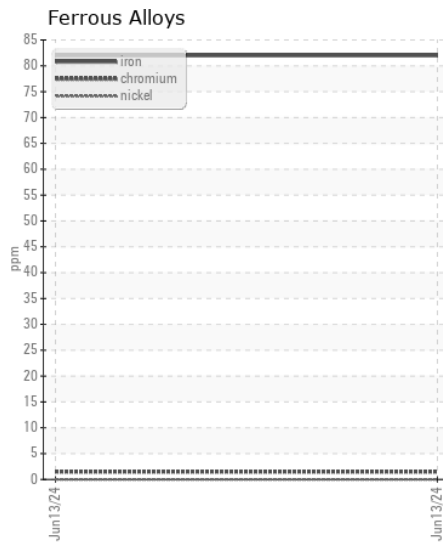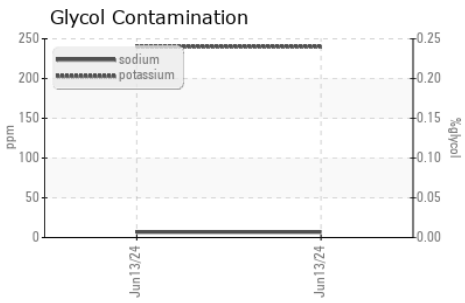

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513

**Sample No.** : RPL0004768

**Lab Number** : 06231233

**Unique Number** : 11114726

**Test Package** : FLEET

**Received** : 09 Jul 2024

**Tested** : 10 Jul 2024

**Diagnosed** : 10 Jul 2024 - Don Baldridge

**RTL PACLEASE - 7009 - Nashville**

900 Expo Dr.

Smyrna, TN

US 37167

Contact: TECHNICIAN ACCOUNT

catherine.anastasio@wearcheck.com

T:

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)