



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
PETERBILT 8271011
Component
Diesel Engine
Fluid
CHEVRON DELO 400 SAE 10W30 (45 QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		RPL0004732	RPL0004721	---
Sample Date		Client Info		01 Jul 2024	12 Oct 2023	---
Machine Age	mls	Client Info		120592	53666	---
Oil Age	mls	Client Info		66926	53666	---
Filter Age	mls	Client Info		66926	53666	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				NORMAL	ABNORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	94	90	---
Chromium	ppm	ASTM D5185m	>20	2	2	---
Nickel	ppm	ASTM D5185m	>4	0	<1	---
Titanium	ppm	ASTM D5185m		7	4	---
Silver	ppm	ASTM D5185m	>3	<1	0	---
Aluminum	ppm	ASTM D5185m	>20	11	30	---
Lead	ppm	ASTM D5185m	>40	<1	2	---
Copper	ppm	ASTM D5185m	>330	7	13	---
Tin	ppm	ASTM D5185m	>15	1	4	---
Vanadium	ppm	ASTM D5185m		<1	<1	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	10	16	---
Potassium	ppm	ASTM D5185m	>20	33	▲ 195	---
Fuel		WC Method	>5	<1.0	<1.0	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	0.8	0.5	---
Nitration	Abs/cm	*ASTM D7624	>20	13.2	13.5	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	31.0	28.0	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		4	14	---
Boron	ppm	ASTM D5185m		38	23	---
Barium	ppm	ASTM D5185m		0	0	---
Molybdenum	ppm	ASTM D5185m		77	37	---
Manganese	ppm	ASTM D5185m		2	2	---
Magnesium	ppm	ASTM D5185m		423	543	---
Calcium	ppm	ASTM D5185m		1827	1790	---
Phosphorus	ppm	ASTM D5185m	1260	1122	810	---
Zinc	ppm	ASTM D5185m	1400	1358	1017	---
Sulfur	ppm	ASTM D5185m		3631	3559	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	28.8	23.6	---
Base Number (BN)	mg KOH/g	ASTM D2896	10.1	5.1	4.9	---
Visc @ 100°C	cSt	ASTM D445	11.1	13.2	● 12.9	---

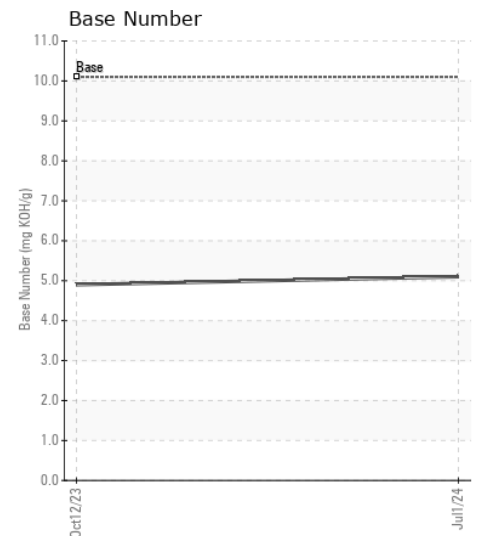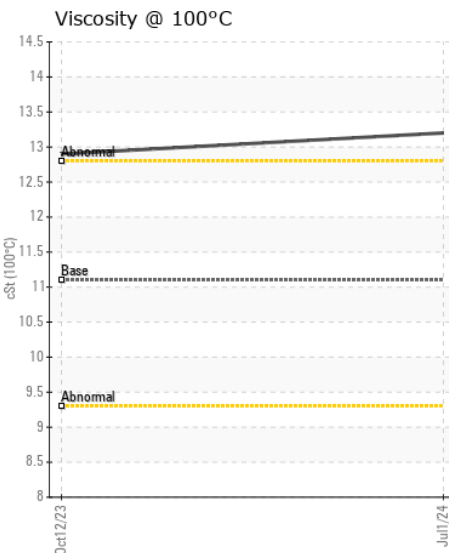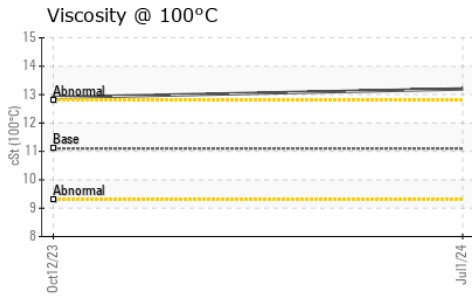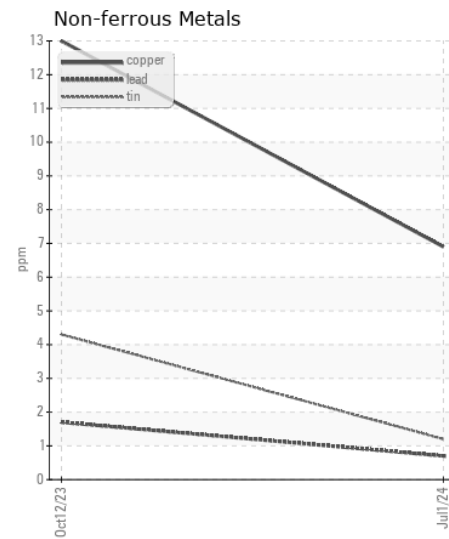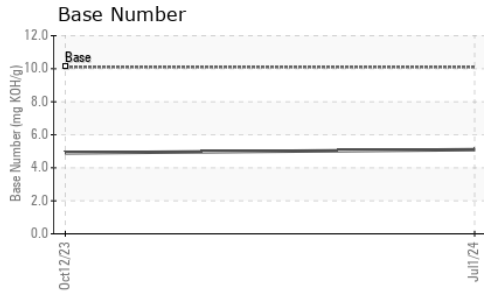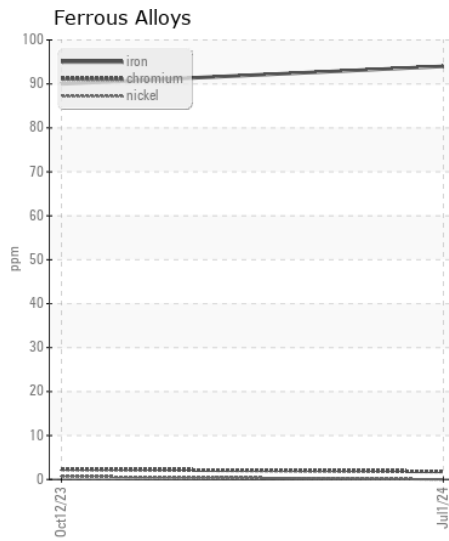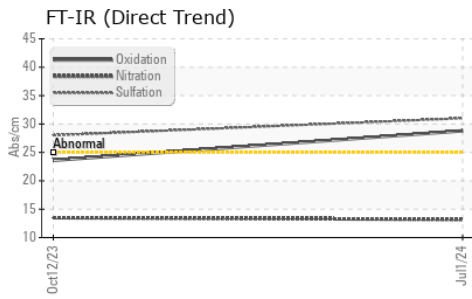

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : RPL0004732
Lab Number : 06231238
Unique Number : 11114731
Test Package : FLEET
Received : 09 Jul 2024
Tested : 10 Jul 2024
Diagnosed : 10 Jul 2024 - Don Baldrige

RTL PACLEASE - 7009 - Nashville
 900 Expo Dr.
 Smyrna, TN
 US 37167
 Contact: Jon Atwood
 AtwoodJ@RushEnterprises.com
 T: (800)489-7403
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)