



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**JOHN DEERE 772G 00219**  
 Component  
**Diesel Engine**  
 Fluid  
**DIESEL ENGINE OIL SAE 40 (--- QTS)**

### RECOMMENDATION

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) DIESEL ENGINE OIL SAE 40. Please confirm.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0223531</b>	JR0173999	---
Sample Date		Client Info		<b>08 Jul 2024</b>	22 May 2023	---
Machine Age	hrs	Client Info		<b>10835</b>	9360	---
Oil Age	hrs	Client Info		<b>0</b>	0	---
Filter Age	hrs	Client Info		<b>0</b>	0	---
Oil Changed		Client Info		<b>N/A</b>	N/A	---
Filter Changed		Client Info		<b>N/A</b>	N/A	---
Sample Status				<b>NORMAL</b>	NORMAL	---

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>51	<b>25</b>	8	---
Chromium	ppm	ASTM D5185m	>11	<b>&lt;1</b>	<1	---
Nickel	ppm	ASTM D5185m	>5	<b>0</b>	0	---
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	---
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>31	<b>8</b>	1	---
Lead	ppm	ASTM D5185m	>26	<b>7</b>	<1	---
Copper	ppm	ASTM D5185m	>26	<b>6</b>	1	---
Tin	ppm	ASTM D5185m	>4	<b>0</b>	<1	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

### CONTAMINATION








Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>22	<b>6</b>	6	---
Potassium	ppm	ASTM D5185m	>20	<b>15</b>	6	---
Fuel		WC Method	>2.1	<b>&lt;1.0</b>	<1.0	---
Water		WC Method	>0.21	<b>NEG</b>	NEG	---
Glycol		WC Method		<b>NEG</b>	NEG	---
Soot %	%	*ASTM D7844	>3	<b>0.4</b>	0.2	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>10.2</b>	8.8	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>23.3</b>	22.7	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.21	<b>NEG</b>	NEG	---

### FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>216	<b>4</b>	3	---
Boron	ppm	ASTM D5185m	250	<b>23</b>	34	---
Barium	ppm	ASTM D5185m	10	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m	100	<b>155</b>	50	---
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
Magnesium	ppm	ASTM D5185m	450	<b>644</b>	531	---
Calcium	ppm	ASTM D5185m	3000	<b>1898</b>	1853	---
Phosphorus	ppm	ASTM D5185m	1150	<b>940</b>	959	---
Zinc	ppm	ASTM D5185m	1350	<b>1158</b>	1198	---
Sulfur	ppm	ASTM D5185m	4250	<b>3790</b>	3599	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>17.1</b>	21.1	---
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	<b>6.8</b>	9.3	---
Visc @ 100°C	cSt	ASTM D445	14.4	<b>13.1</b>	12.6	---

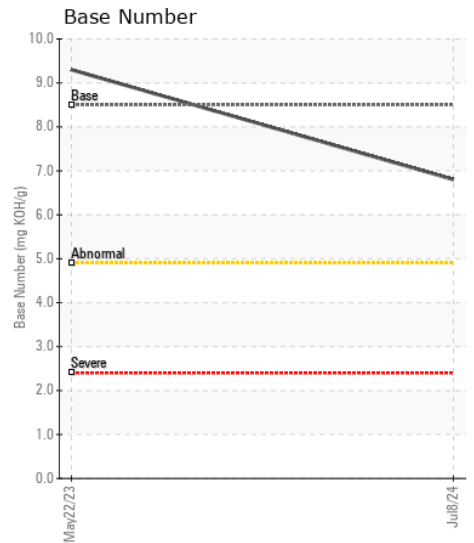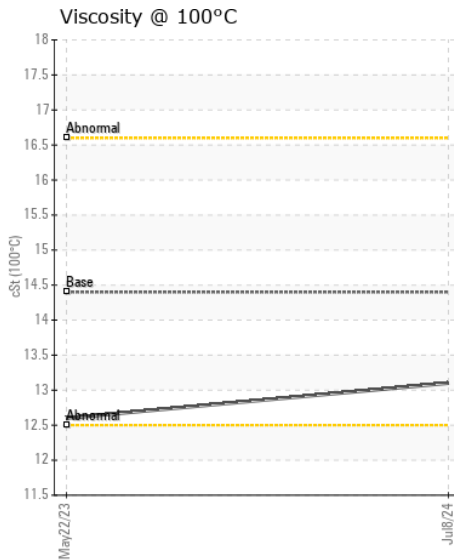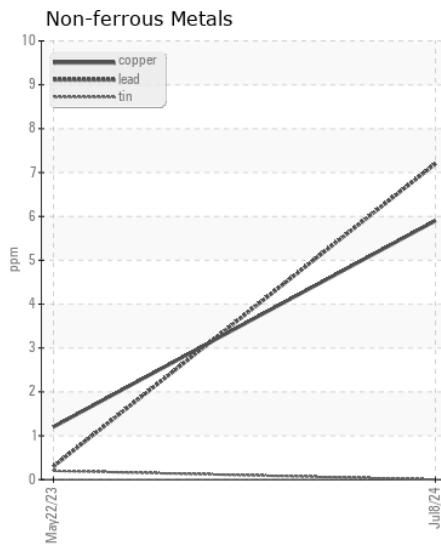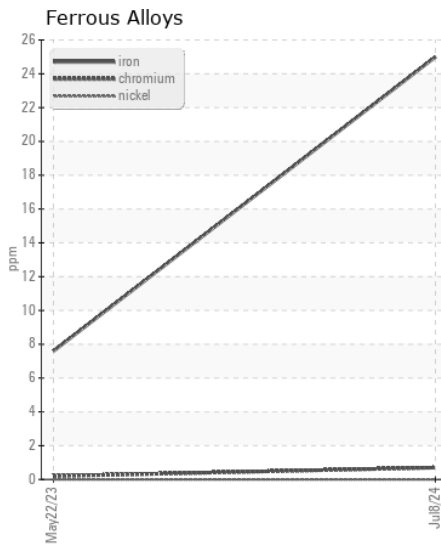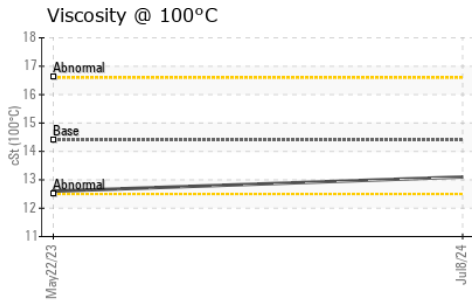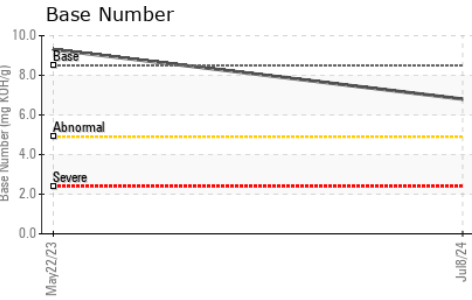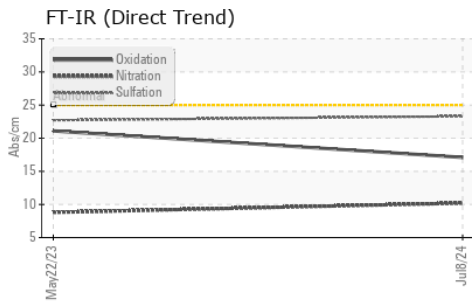

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0223531 **Received** : 09 Jul 2024  
**Lab Number** : 06231279 **Tested** : 10 Jul 2024  
**Unique Number** : 11114772 **Diagnosed** : 10 Jul 2024 - Wes Davis  
**Test Package** : CONST ( Additional Tests: TBN )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**JRE - GREENSBORO**  
 411 SOUTH REGIONAL ROAD  
 GREENSBORO, NC  
 US 27409

Contact: NICK GALLAHER  
 NGALLAHER@JRENET.COM

T: (336)668-2762

F: (336)665-9556