



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**JOHN DEERE 260P 1DW260PATPFB06646**  
 Component  
**Diesel Engine**  
 Fluid  
**JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0219637</b>	JR0206348	JR0188335
Sample Date		Client Info		<b>03 Jul 2024</b>	26 Mar 2024	14 Sep 2023
Machine Age	hrs	Client Info		<b>1468</b>	1010	432
Oil Age	hrs	Client Info		<b>458</b>	578	432
Filter Age	hrs	Client Info		<b>0</b>	0	432
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	ATTENTION

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>51	<b>15</b>	<1	43
Chromium	ppm	ASTM D5185m	>11	<b>0</b>	<1	<1
Nickel	ppm	ASTM D5185m	>5	<b>7</b>	<1	11
Titanium	ppm	ASTM D5185m		<b>0</b>	0	<1
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>31	<b>3</b>	4	5
Lead	ppm	ASTM D5185m	>26	<b>0</b>	0	3
Copper	ppm	ASTM D5185m	>26	<b>9</b>	0	35
Tin	ppm	ASTM D5185m	>4	<b>0</b>	0	2
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	<1
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>22	<b>5</b>	6	10
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	2	7
Fuel		WC Method	>2.1	<b>&lt;1.0</b>	<1.0	0.2
Water		WC Method	>0.21	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.2</b>	0	0.2
Nitration	Abs/cm	*ASTM D7624	>20	<b>7.6</b>	5.5	8.0
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>20.5</b>	19.3	20.0
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.21	<b>NEG</b>	NEG	NEG

### FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>31	<b>2</b>	0	5
Boron	ppm	ASTM D5185m		<b>227</b>	272	213
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>247</b>	217	265
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	0	2
Magnesium	ppm	ASTM D5185m		<b>805</b>	785	830
Calcium	ppm	ASTM D5185m		<b>1508</b>	1285	1468
Phosphorus	ppm	ASTM D5185m		<b>938</b>	840	935
Zinc	ppm	ASTM D5185m		<b>1074</b>	1021	1151
Sulfur	ppm	ASTM D5185m		<b>3433</b>	3317	3274
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>14.9</b>	14.2	15.0
Base Number (BN)	mg KOH/g	ASTM D2896	13.6	<b>9.2</b>	10.3	8.5
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.1</b>	14.3	10.4


**FT-IR (Direct Trend)**

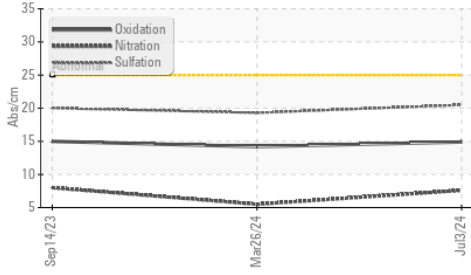


**Base Number**

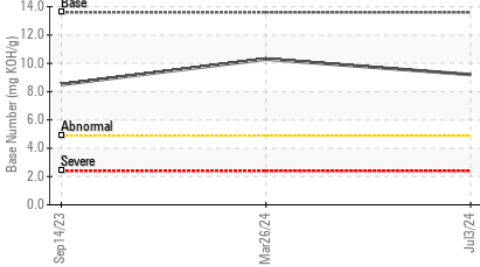


**Viscosity @ 100°C**

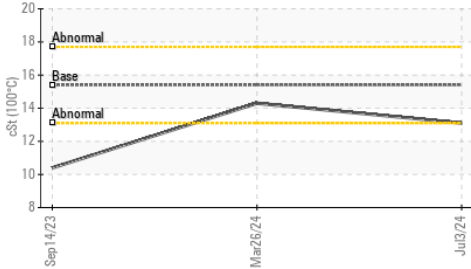


**Ferrous Alloys**

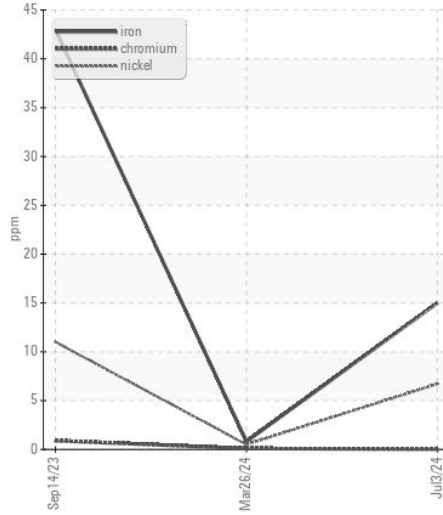


**Non-ferrous Metals**

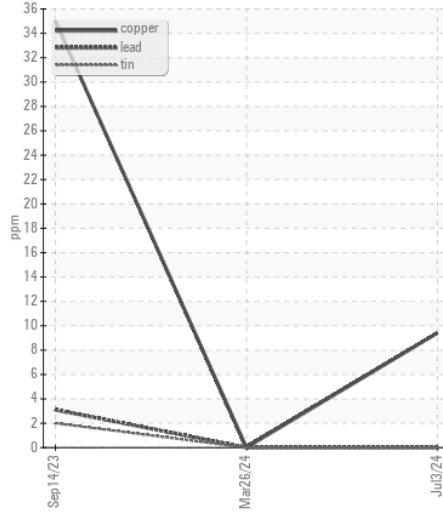

**Viscosity @ 100°C**

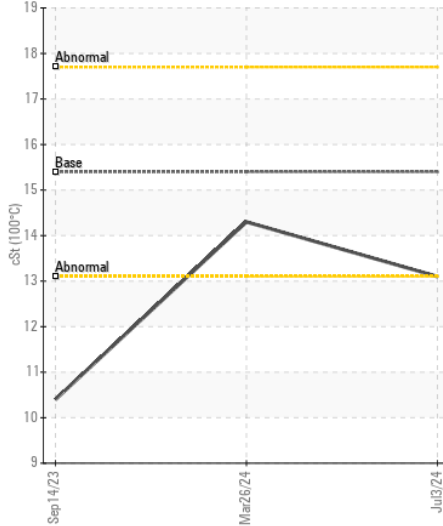

**Base Number**

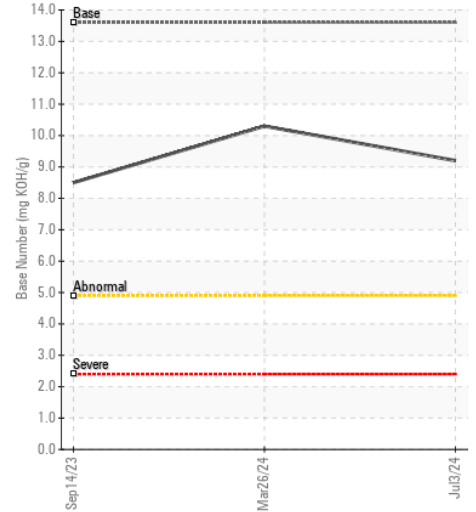

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0219637 **Received** : 09 Jul 2024  
**Lab Number** : 06231329 **Tested** : 10 Jul 2024  
**Unique Number** : 11114822 **Diagnosed** : 10 Jul 2024 - Wes Davis  
**Test Package** : CONST ( Additional Tests: TBN )

**JRE - CHARLOTTE**  
 9550 STATESVILLE ROAD  
 CHARLOTTE, NC  
 US 28269  
 Contact: CHARLOTTE SHOP  
 myoung@jamesriverequipment.com  
 T: (704)597-0211  
 F: (704)596-6198

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)