



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
JOHN DEERE 750K 1T0750KXJLF368013
 Component
Hydrostatic
 Fluid
JOHN DEERE HYDRAU (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0226165	JR0200680	---
Sample Date		Client Info		08 Jul 2024	07 Mar 2024	---
Machine Age	hrs	Client Info		4489	4018	---
Oil Age	hrs	Client Info		471	4018	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Not Chngd	Changed	---
Filter Changed		Client Info		Not Chngd	Changed	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
Iron	ppm	ASTM D5185m	>31	9	14	---
Chromium	ppm	ASTM D5185m	>9	<1	<1	---
Nickel	ppm	ASTM D5185m	>5	<1	<1	---
Titanium	ppm	ASTM D5185m		<1	<1	---
Silver	ppm	ASTM D5185m		<1	<1	---
Aluminum	ppm	ASTM D5185m	>10	2	2	---
Lead	ppm	ASTM D5185m	>11	1	1	---
Copper	ppm	ASTM D5185m	>41	8	12	---
Tin	ppm	ASTM D5185m	>5	<1	<1	---
Vanadium	ppm	ASTM D5185m		<1	<1	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION











The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Silicon	ppm	ASTM D5185m	>31	2	2	---
Potassium	ppm	ASTM D5185m	>20	2	2	---
Water		WC Method	>0.1	NEG	NEG	---
Particles >4µm		ASTM D7647	>20000	400	---	---
Particles >6µm		ASTM D7647	>5000	92	---	---
Particles >14µm		ASTM D7647	>640	9	---	---
Particles >21µm		ASTM D7647	>160	3	---	---
Particles >38µm		ASTM D7647	>40	1	---	---
Particles >71µm		ASTM D7647	>10	1	---	---
Oil Cleanliness		ISO 4406 (c)	>21/19/16	16/14/10	---	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	---

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>21	0	0	---
Boron	ppm	ASTM D5185m		0	0	---
Barium	ppm	ASTM D5185m		1	0	---
Molybdenum	ppm	ASTM D5185m		1	<1	---
Manganese	ppm	ASTM D5185m		<1	<1	---
Magnesium	ppm	ASTM D5185m		3	2	---
Calcium	ppm	ASTM D5185m	87	88	95	---
Phosphorus	ppm	ASTM D5185m	727	652	626	---
Zinc	ppm	ASTM D5185m	900	832	815	---
Sulfur	ppm	ASTM D5185m	1500	1654	1698	---
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.65	---	---
Visc @ 40°C	cSt	ASTM D445	65	55.7	54.2	---

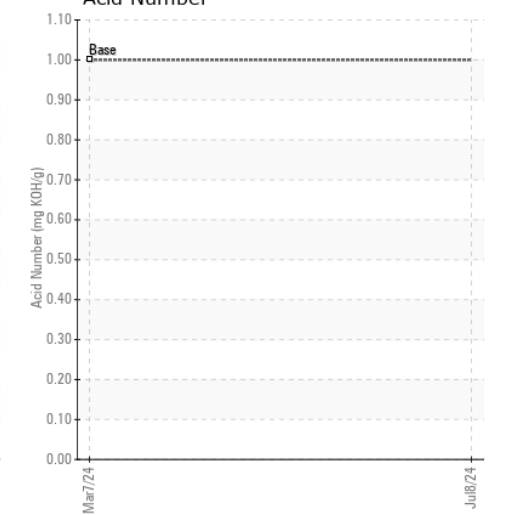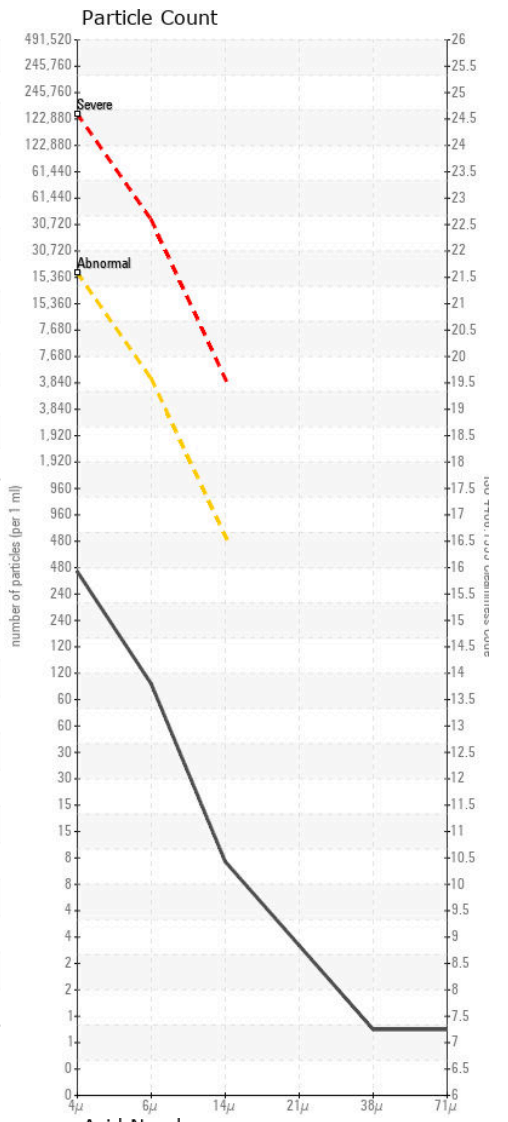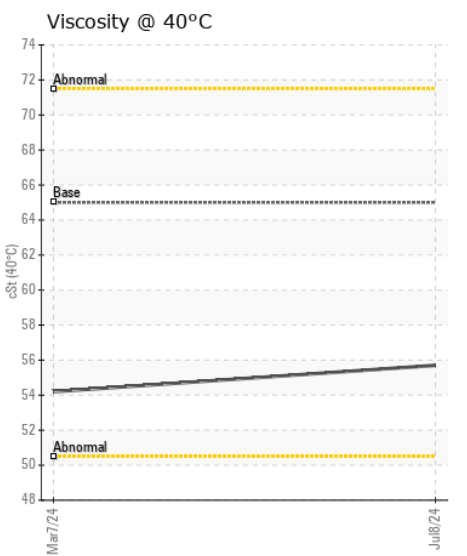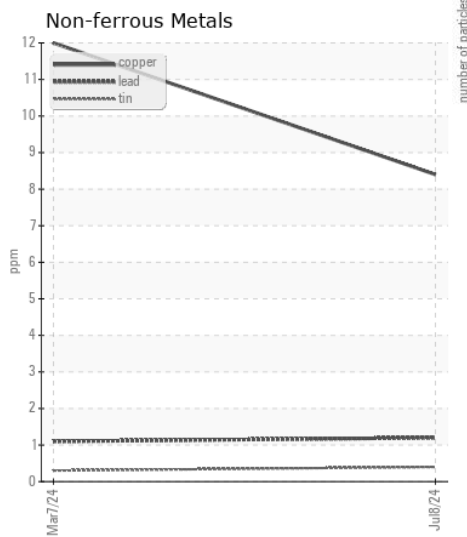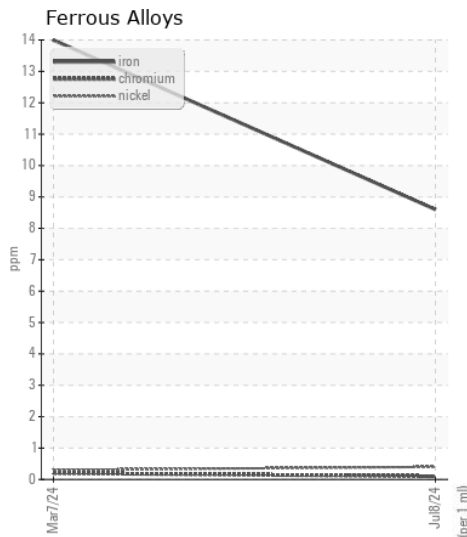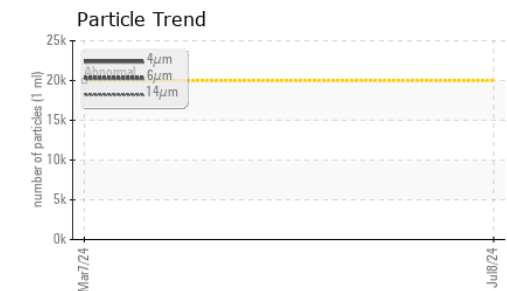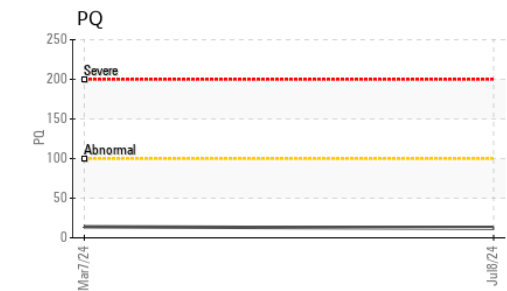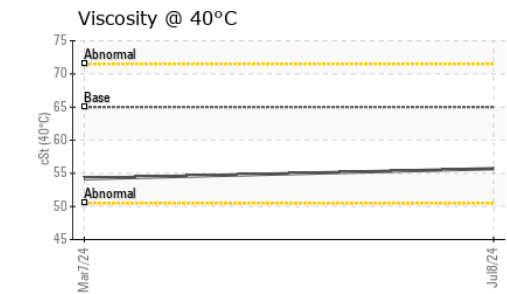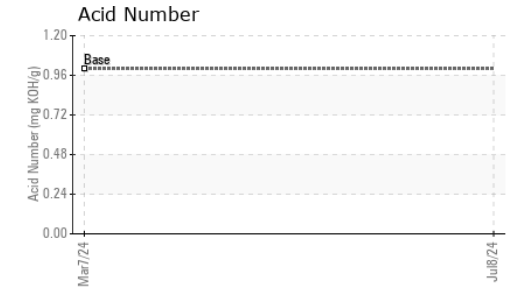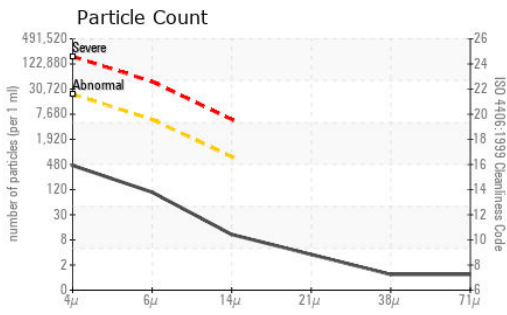

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0226165 **Received** : 09 Jul 2024
Lab Number : 06231386 **Tested** : 10 Jul 2024
Unique Number : 11114879 **Diagnosed** : 10 Jul 2024 - Wes Davis
Test Package : CONST (Additional Tests: PQ, PrtCount)

JRE - GREENVILLE
 3604 HIGHWAY 264 E
 GREENVILLE, NC
 US 27834-5800
 Contact: GREENVILLE SHOP
 christopher.martin@jamesriverequipment.com
 T:
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)