



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area

[W9628]

Machine Id

JOHN DEERE 748L-II 1DW748LBTKF697253

Component

Hydraulic System

Fluid

JOHN DEERE HYDRAU (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0226000	JR0025720	---
Sample Date		Client Info		05 Jul 2024	18 Nov 2019	---
Machine Age	hrs	Client Info		8021	500	---
Oil Age	hrs	Client Info		0	500	---
Filter Age	hrs	Client Info		0	500	---
Oil Changed		Client Info		Not Changd	Not Changd	---
Filter Changed		Client Info		Not Changd	Not Changd	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>50	17	19	---
Iron	ppm	ASTM D5185m	>23	12	4	---
Chromium	ppm	ASTM D5185m	>9	2	<1	---
Nickel	ppm	ASTM D5185m	>5	<1	0	---
Titanium	ppm	ASTM D5185m		<1	0	---
Silver	ppm	ASTM D5185m		<1	<1	---
Aluminum	ppm	ASTM D5185m	>9	2	<1	---
Lead	ppm	ASTM D5185m	>28	<1	<1	---
Copper	ppm	ASTM D5185m	>51	1	2	---
Tin	ppm	ASTM D5185m	>5	<1	0	---
Vanadium	ppm	ASTM D5185m		<1	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION










The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>31	6	2	---
Potassium	ppm	ASTM D5185m	>20	13	3	---
Water		WC Method	>0.075	NEG	NEG	---
Particles >4µm		ASTM D7647	>80000	26863	4536	---
Particles >6µm		ASTM D7647	>20000	812	520	---
Particles >14µm		ASTM D7647	>640	5	30	---
Particles >21µm		ASTM D7647	>160	1	14	---
Particles >38µm		ASTM D7647	>40	0	11	---
Particles >71µm		ASTM D7647	>10	0	10	---
Oil Cleanliness		ISO 4406 (c)	>23/21/16	22/17/10	19/16/12	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	VLITE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.075	NEG	NEG	---

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>21	5	2	---
Boron	ppm	ASTM D5185m		15	0	---
Barium	ppm	ASTM D5185m		1	<1	---
Molybdenum	ppm	ASTM D5185m		12	<1	---
Manganese	ppm	ASTM D5185m		<1	<1	---
Magnesium	ppm	ASTM D5185m		31	2	---
Calcium	ppm	ASTM D5185m	87	422	163	---
Phosphorus	ppm	ASTM D5185m	727	356	623	---
Zinc	ppm	ASTM D5185m	900	409	800	---
Sulfur	ppm	ASTM D5185m	1500	1471	1426	---
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.50	0.736	---
Visc @ 40°C	cSt	ASTM D445	65	55.5	58.6	---

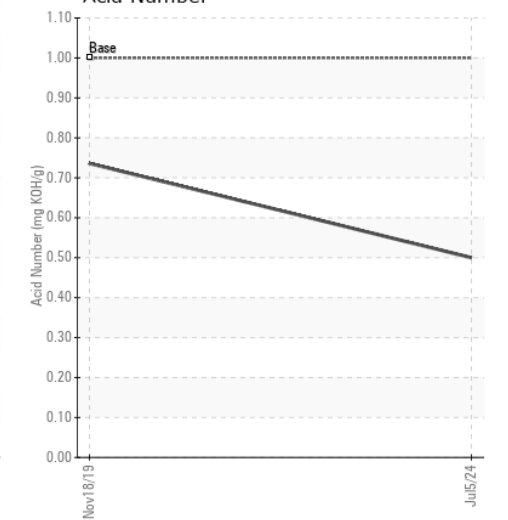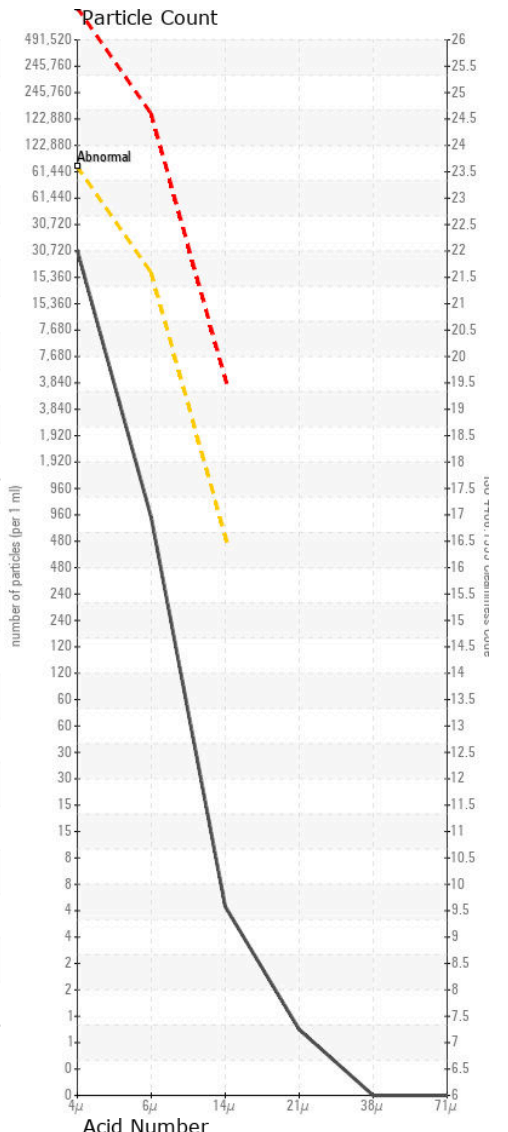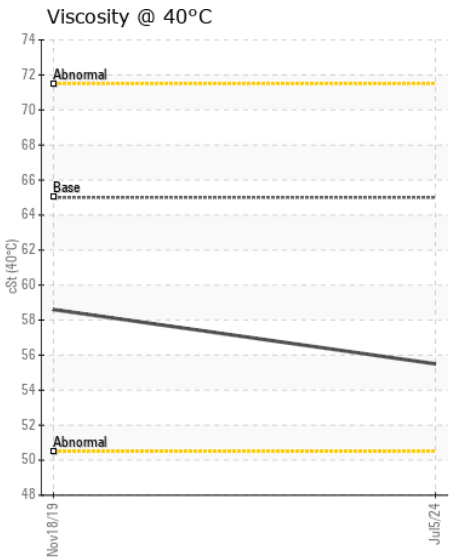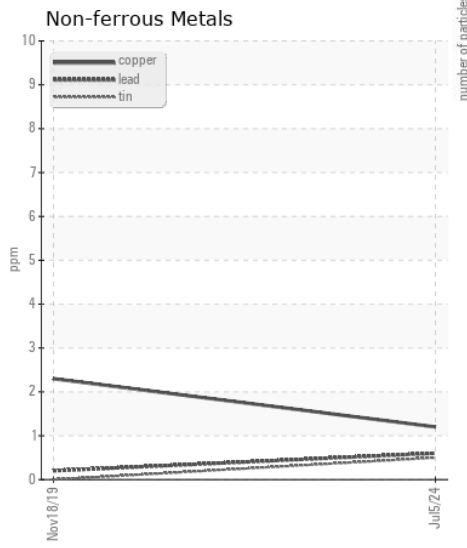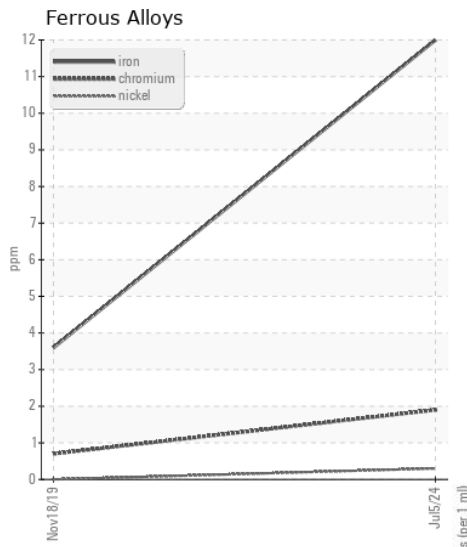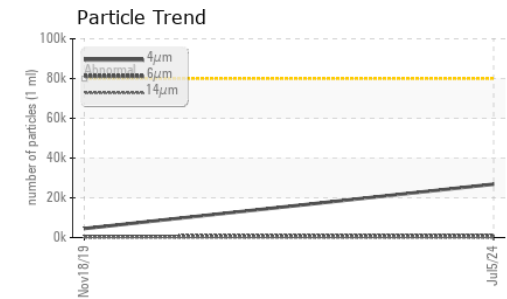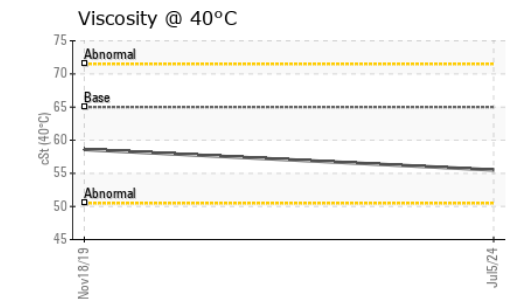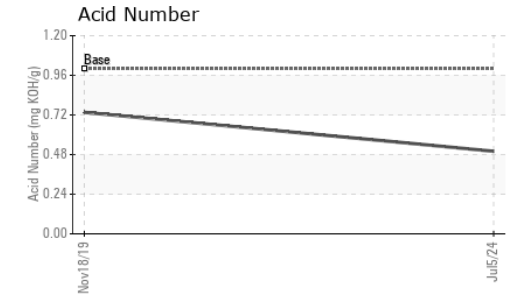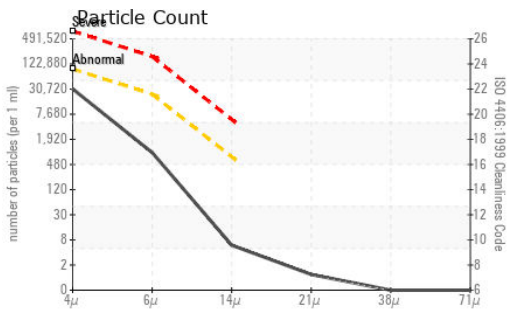

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0226000 **Received** : 09 Jul 2024
Lab Number : 06231400 **Tested** : 10 Jul 2024
Unique Number : 11114893 **Diagnosed** : 10 Jul 2024 - Don Baldrige
Test Package : CONST (Additional Tests: PQ)

CONETOE LAND & TIMBER
 3820 STEVENS MILL RD
 GOLDSBORO, NC
 US 27530
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: