



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 245G B-145 (S/N 1FF245GXLMF802192)
 Component
Hydraulic System
 Fluid
JOHN DEERE ZINC-FREE HYDRAULIC OIL 46 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0225484	JR0217777	JR0211245
Sample Date		Client Info		08 Jul 2024	23 May 2024	05 Apr 2024
Machine Age	hrs	Client Info		4601	4357	4114
Oil Age	hrs	Client Info		4601	4357	4114
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Chngd	Not Chngd	Not Chngd
Filter Changed		Client Info		Not Chngd	Not Chngd	Changed
Sample Status				NORMAL	NORMAL	ABNORMAL

WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
Iron	ppm	ASTM D5185m	>32	6	5	7
Chromium	ppm	ASTM D5185m	>9	<1	0	0
Nickel	ppm	ASTM D5185m	>5	<1	0	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m		<1	0	0
Aluminum	ppm	ASTM D5185m	>9	2	<1	2
Lead	ppm	ASTM D5185m	>28	<1	0	<1
Copper	ppm	ASTM D5185m	>50	4	3	4
Tin	ppm	ASTM D5185m	>5	1	<1	<1
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION











The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>11	2	2	0
Potassium	ppm	ASTM D5185m	>20	2	<1	1
Water		WC Method	>0.075	NEG	NEG	NEG
Particles >4µm		ASTM D7647	>80000	4969	4958	---
Particles >6µm		ASTM D7647	>20000	219	637	---
Particles >14µm		ASTM D7647	>640	6	16	---
Particles >21µm		ASTM D7647	>160	2	4	---
Particles >38µm		ASTM D7647	>40	0	0	---
Particles >71µm		ASTM D7647	>10	0	0	---
Oil Cleanliness		ISO 4406 (c)	>23/21/16	19/15/10	19/16/11	---
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	▲ MODER
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.075	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>21	0	<1	0
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		<1	0	0
Molybdenum	ppm	ASTM D5185m		<1	0	0
Manganese	ppm	ASTM D5185m		<1	<1	0
Magnesium	ppm	ASTM D5185m		<1	0	<1
Calcium	ppm	ASTM D5185m		3	0	8
Phosphorus	ppm	ASTM D5185m		474	465	486
Zinc	ppm	ASTM D5185m		25	4	17
Sulfur	ppm	ASTM D5185m		1197	1313	1389
Acid Number (AN)	mg KOH/g	ASTM D8045	0.06	0.21	0.20	0.24
Visc @ 40°C	cSt	ASTM D445	47	45.0	44.9	45.2

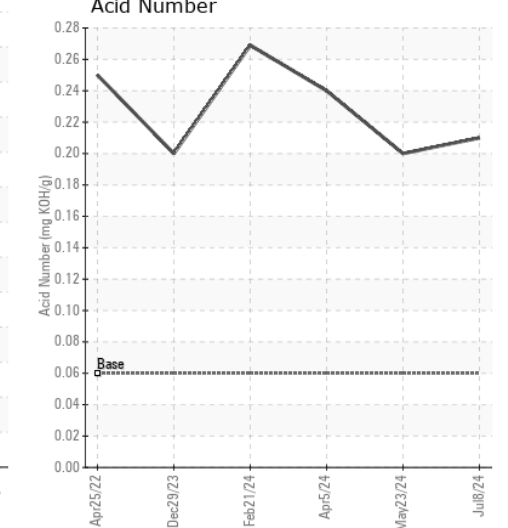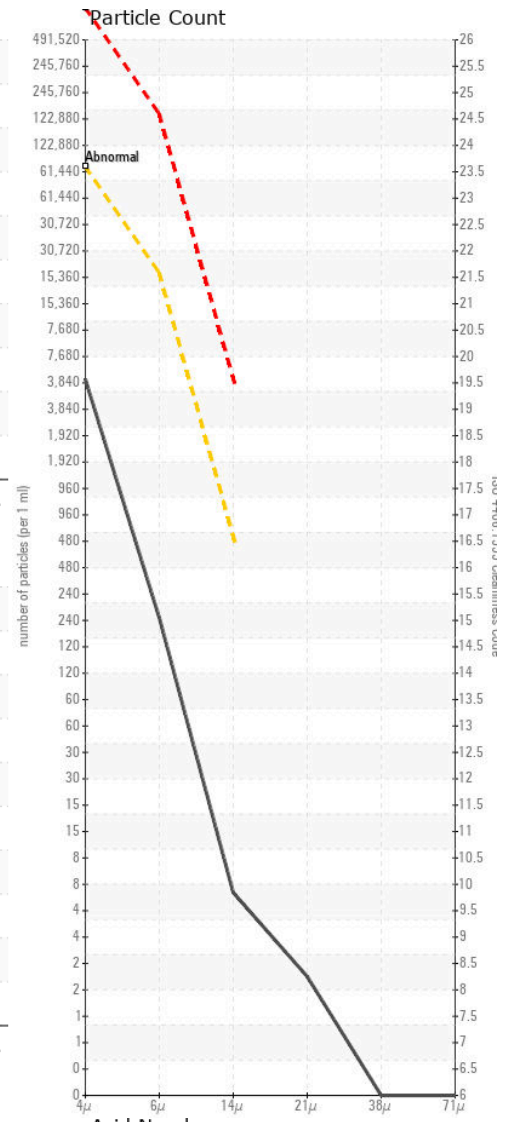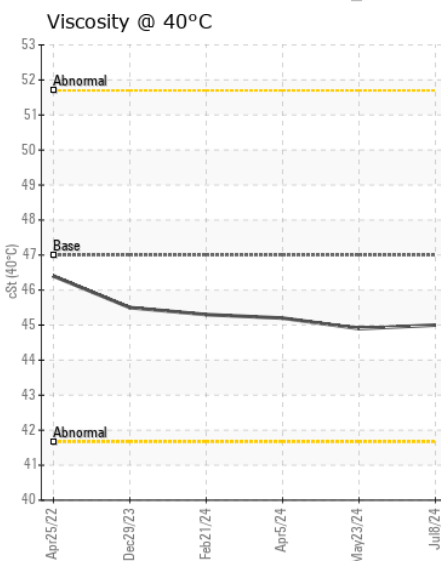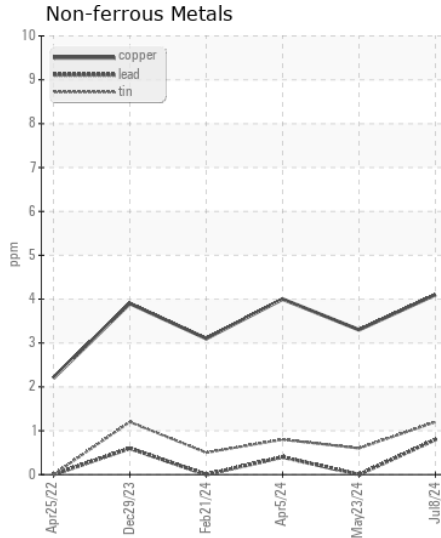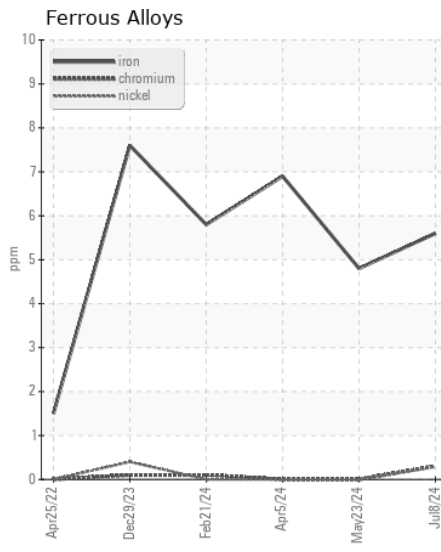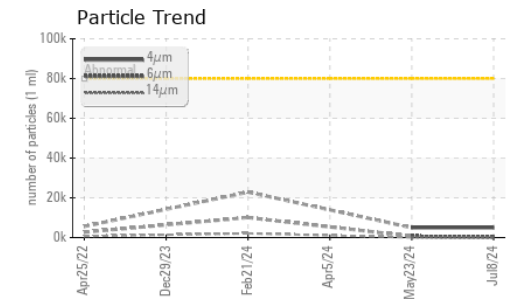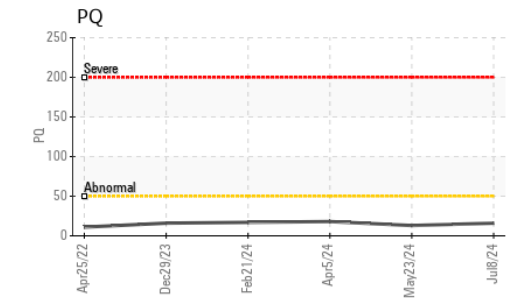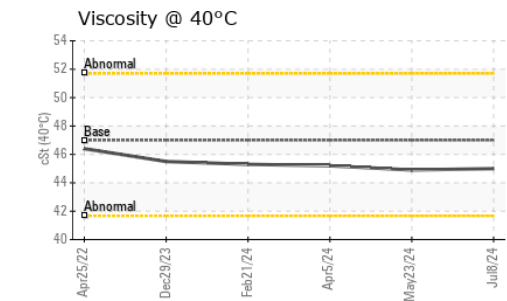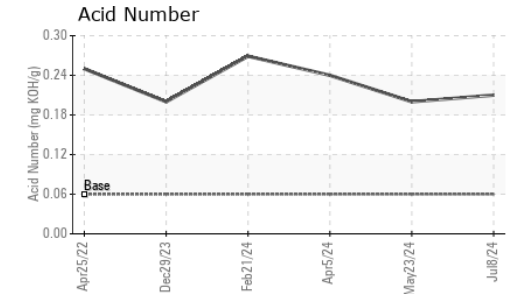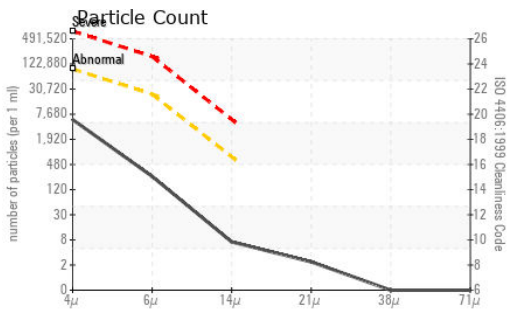

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0225484 **Received** : 09 Jul 2024
Lab Number : 06231421 **Tested** : 10 Jul 2024
Unique Number : 11114914 **Diagnosed** : 10 Jul 2024 - Don Baldridge
Test Package : CONST (Additional Tests: PQ)

PLEASANT CONSTRUCTION INC
 24024 FREDERICK RD
 CLARKSBURG, MD
 US 20871
 Contact: HERBIE TRENT

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (301)502-0163

F: