



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	NORMAL

Machine Id
CAE CAE HPU - T050000886 (S/N NO INFO ON SIF/BOTTLE)

Component
Hydraulic System

Fluid
{not provided} (--- GAL)

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		T05000886	---	---
Sample Date		Client Info		02 Jul 2024	---	---
Machine Age	hrs	Client Info		0	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				ABNORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>20	0	---	---
Chromium	ppm	ASTM D5185m	>20	<1	---	---
Nickel	ppm	ASTM D5185m	>20	<1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		<1	---	---
Aluminum	ppm	ASTM D5185m	>20	2	---	---
Lead	ppm	ASTM D5185m	>20	1	---	---
Copper	ppm	ASTM D5185m	>20	<1	---	---
Tin	ppm	ASTM D5185m	>20	<1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION

Elemental level of silicon (Si) above normal. The amount and size of particulates present in the system are acceptable.


Silicon	ppm	ASTM D5185m	>15	▲ 20	---	---
Potassium	ppm	ASTM D5185m	>20	1	---	---
Water	%	ASTM D6304	>0.05	0.005	---	---
ppm Water	ppm	ASTM D6304	>500	53	---	---
Particles >4µm		ASTM D7647	>1300	312	---	---
Particles >6µm		ASTM D7647	>320	73	---	---
Particles >14µm		ASTM D7647	>40	8	---	---
Particles >21µm		ASTM D7647	>10	3	---	---
Particles >38µm		ASTM D7647	>3	0	---	---
Particles >71µm		ASTM D7647	>3	0	---	---
Oil Cleanliness		ISO 4406 (c)	>17/15/12	15/13/10	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.05	NEG	---	---

FLUID CONDITION


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		0	---	---
Boron	ppm	ASTM D5185m		0	---	---
Barium	ppm	ASTM D5185m		<1	---	---
Molybdenum	ppm	ASTM D5185m		<1	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m		88	---	---
Calcium	ppm	ASTM D5185m		67	---	---
Phosphorus	ppm	ASTM D5185m		289	---	---
Zinc	ppm	ASTM D5185m		387	---	---
Sulfur	ppm	ASTM D5185m		1726	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045		0.29	---	---
Visc @ 40°C	cSt	ASTM D445		45.6	---	---
Visc @ 100°C	cSt	ASTM D445		7.0	---	---
Viscosity Index (VI)	Scale	ASTM D2270		110	---	---



▲ Silicon (ppm)

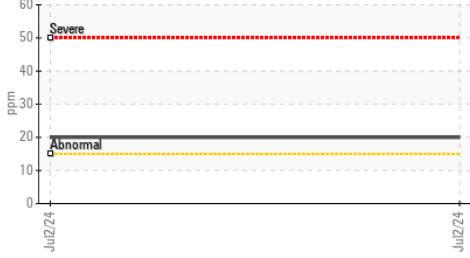


Ferrous Alloys

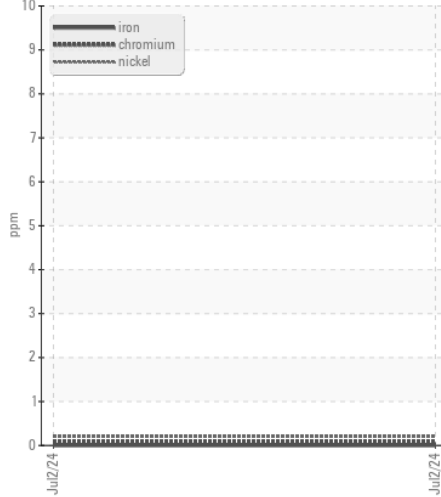


Particle Count

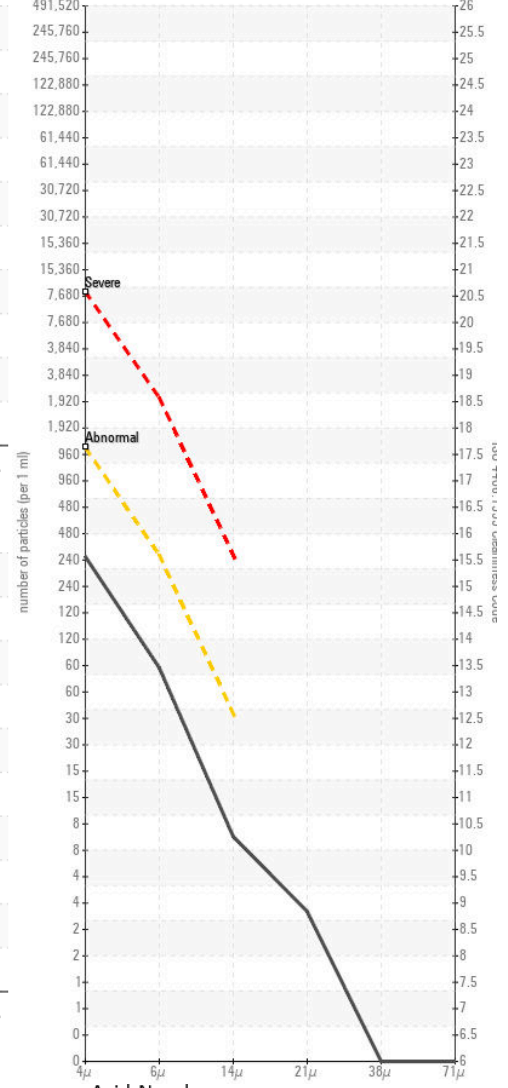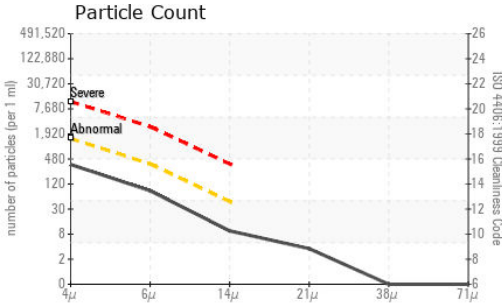


Non-ferrous Metals

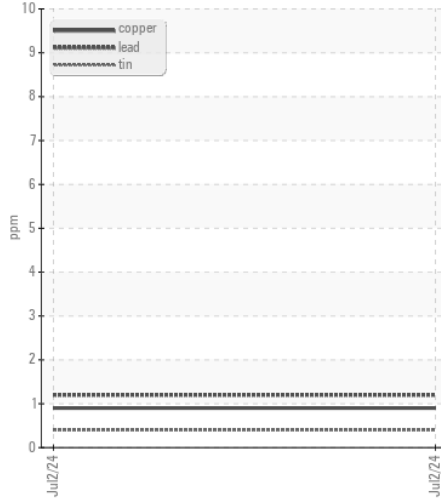


Acid Number

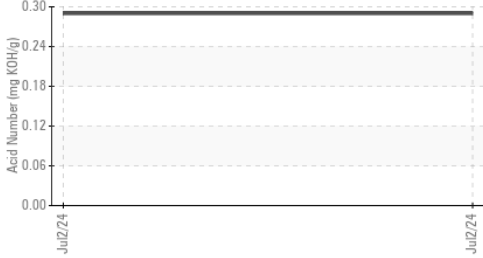


Water (KF)

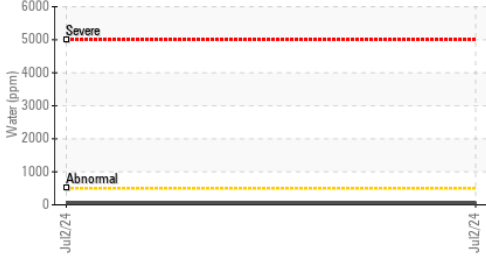


Viscosity @ 100°C

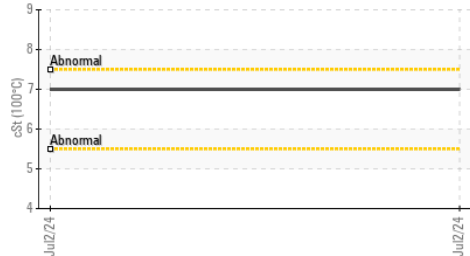

Viscosity @ 40°C

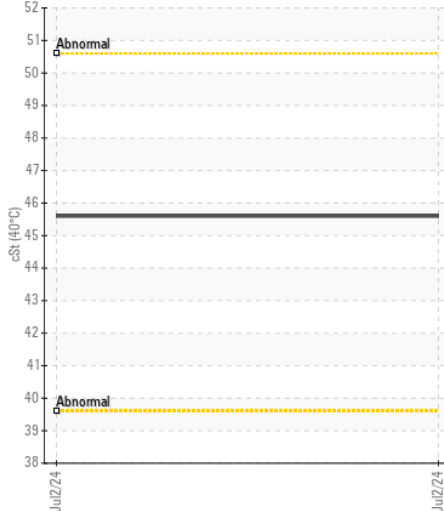

Acid Number

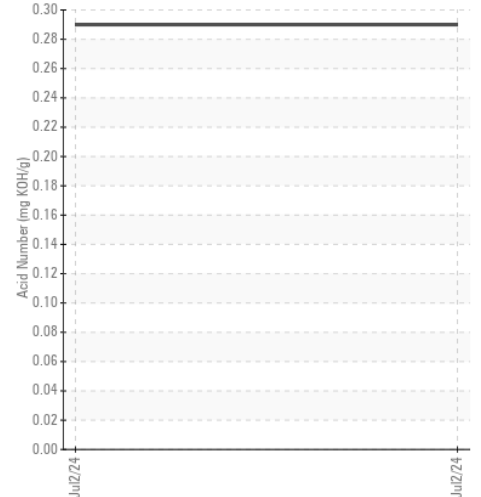

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : TO50000886 **Received** : 09 Jul 2024
Lab Number : 06231491 **Tested** : 10 Jul 2024
Unique Number : 11114984 **Diagnosed** : 11 Jul 2024 - Jonathan Hester
Test Package : IND 2 (Additional Tests: KF, KV100, VI)

AVENGER FLIGHT GROUP
 2800 VALLEY VIEW LANE SUITE 180
 IRVING, TX
 US 75062
 Contact: JOEY BLANKENSHIP
 joeyblankenship@afgsim.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: