



WEAR  
CONTAMINATION  
FLUID CONDITION

**ATTENTION**  
**NORMAL**  
**NORMAL**

Area  
**S9000**  
Machine Id

**SENNEBOGEN S40-3N S076570**

Component  
**Compressor**

### RECOMMENDATION

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

### WEAR

The tin level is abnormal. All other component wear rates are normal.







### CONTAMINATION

There is no indication of any contamination in the oil.

### FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		UCS06231549	---	---
Sample Date		Client Info		19 Jun 2024	---	---
Machine Age	hrs	Client Info		30926	---	---
Oil Age	hrs	Client Info		2659	---	---
Filter Age	hrs	Client Info		2659	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				ATTENTION	---	---
Iron	ppm	ASTM D5185m	>50	2	---	---
Chromium	ppm	ASTM D5185m	>5	<1	---	---
Nickel	ppm	ASTM D5185m		<1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		<1	---	---
Aluminum	ppm	ASTM D5185m	>15	2	---	---
Lead	ppm	ASTM D5185m	>65	<1	---	---
Copper	ppm	ASTM D5185m	>65	1	---	---
Tin	ppm	ASTM D5185m	>10	13	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Silicon	ppm	ASTM D5185m	>35	2	---	---
Potassium	ppm	ASTM D5185m	>20	<1	---	---
Water		WC Method	>0.1	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---
Sodium	ppm	ASTM D5185m		3	---	---
Boron	ppm	ASTM D5185m		5	---	---
Barium	ppm	ASTM D5185m		<1	---	---
Molybdenum	ppm	ASTM D5185m		<1	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m		3	---	---
Calcium	ppm	ASTM D5185m		0	---	---
Phosphorus	ppm	ASTM D5185m		56	---	---
Zinc	ppm	ASTM D5185m		68	---	---
Sulfur	ppm	ASTM D5185m		37	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045		0.52	---	---
Visc @ 40°C	cSt	ASTM D445		64.3	---	---

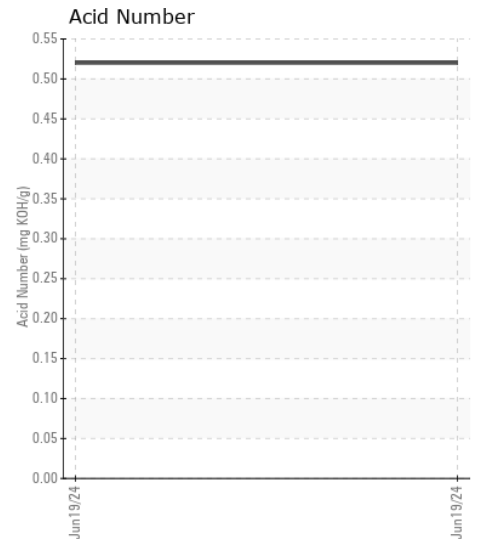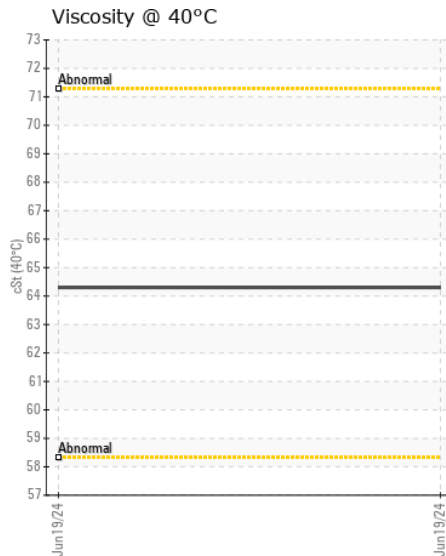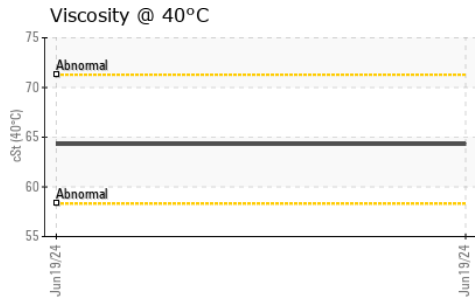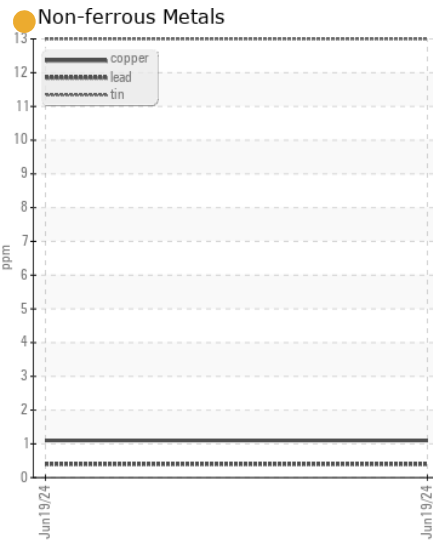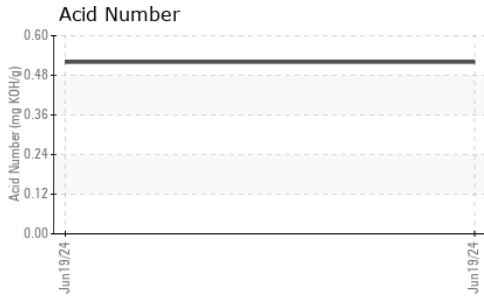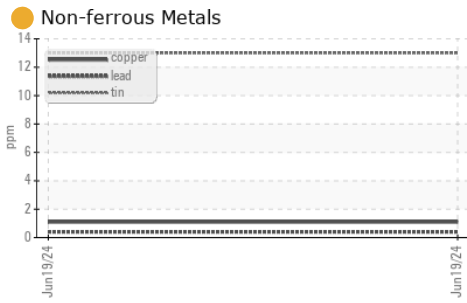

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : UCS06231549 **Received** : 09 Jul 2024  
**Lab Number** : 06231549 **Tested** : 10 Jul 2024  
**Unique Number** : 11115042 **Diagnosed** : 11 Jul 2024 - Jonathan Hester  
**Test Package** : IND 2

**JEMCO-MAXAIR**

WEST FARGO, ND  
US 58078

Contact: DALE K  
dalek@jemco-maxair.com

T: (701)281-0362

F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)