



| | |
|-----------------|---------------|
| WEAR | NORMAL |
| CONTAMINATION | NORMAL |
| FLUID CONDITION | NORMAL |

Area

[47826]

Machine Id

JOHN DEERE 744L 1DW744LXTMF709490

Component

Transmission (Manual)

Fluid

JOHN DEERE HY-GARD HYD/TRANS (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|----------------|-----|-------------|-----------|--------------------|-------------|-------------|
| Sample Number | | Client Info | | JR0132173 | JR0192346 | JR0153453 |
| Sample Date | | Client Info | | 05 Jul 2024 | 23 Oct 2023 | 04 Nov 2022 |
| Machine Age | hrs | Client Info | | 2972 | 2576 | 1970 |
| Oil Age | hrs | Client Info | | 2366 | 606 | 0 |
| Filter Age | hrs | Client Info | | 0 | 606 | 0 |
| Oil Changed | | Client Info | | Not Changed | Not Changed | Changed |
| Filter Changed | | Client Info | | Not Changed | Not Changed | Changed |
| Sample Status | | | | NORMAL | NORMAL | NORMAL |

WEAR

All component wear rates are normal.

| | | | | | | |
|--------------|--------|-------------|------|-------------|------|------|
| PQ | | ASTM D8184 | >95 | 14 | 18 | 13 |
| Iron | ppm | ASTM D5185m | >200 | 19 | 20 | 29 |
| Chromium | ppm | ASTM D5185m | >5 | 0 | 0 | 0 |
| Nickel | ppm | ASTM D5185m | >5 | 0 | 0 | 0 |
| Titanium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Silver | ppm | ASTM D5185m | >7 | 0 | <1 | <1 |
| Aluminum | ppm | ASTM D5185m | >25 | 1 | <1 | 1 |
| Lead | ppm | ASTM D5185m | >45 | 0 | 0 | <1 |
| Copper | ppm | ASTM D5185m | >225 | 12 | 9 | 15 |
| Tin | ppm | ASTM D5185m | >10 | 0 | 0 | 0 |
| Vanadium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| White Metal | scalar | *Visual | NONE | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE | NONE |

CONTAMINATION

There is no indication of any contamination in the fluid.


| | | | | | | |
|------------------|--------|-------------|-------|--------------|-------|-------|
| Silicon | ppm | ASTM D5185m | >125 | 12 | 15 | 19 |
| Potassium | ppm | ASTM D5185m | >20 | <1 | 0 | 3 |
| Water | | WC Method | >0.1 | NEG | NEG | NEG |
| Silt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.1 | NEG | NEG | NEG |

FLUID CONDITION


The condition of the fluid is acceptable for the time in service.

| | | | | | | |
|-------------|-----|-------------|------|--------------|------|------|
| Sodium | ppm | ASTM D5185m | | 14 | 17 | 30 |
| Boron | ppm | ASTM D5185m | 6 | 8 | 6 | 2 |
| Barium | ppm | ASTM D5185m | 0 | <1 | <1 | 0 |
| Molybdenum | ppm | ASTM D5185m | 0 | 3 | 2 | <1 |
| Manganese | ppm | ASTM D5185m | | <1 | <1 | <1 |
| Magnesium | ppm | ASTM D5185m | 145 | 68 | 80 | 79 |
| Calcium | ppm | ASTM D5185m | 3570 | 3049 | 2908 | 3259 |
| Phosphorus | ppm | ASTM D5185m | 1290 | 998 | 816 | 1010 |
| Zinc | ppm | ASTM D5185m | 1640 | 1158 | 1173 | 1269 |
| Sulfur | ppm | ASTM D5185m | | 3758 | 3250 | 4418 |
| Visc @ 40°C | cSt | ASTM D445 | 57.0 | 45.9 | 51.6 | 39.9 |


Viscosity @ 40°C

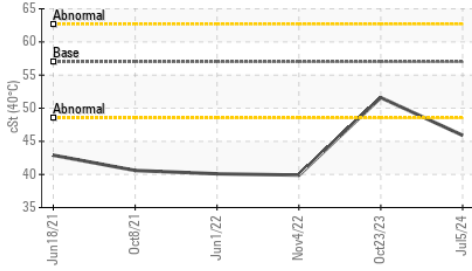


PQ

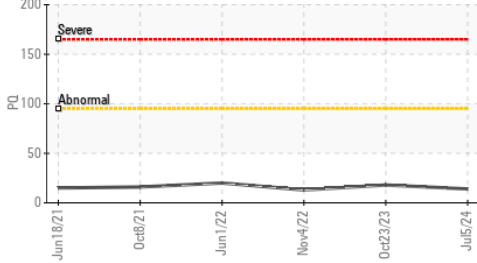


Ferrous Alloys

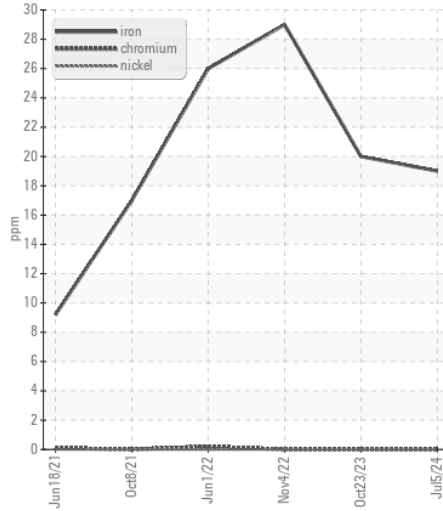


Non-ferrous Metals

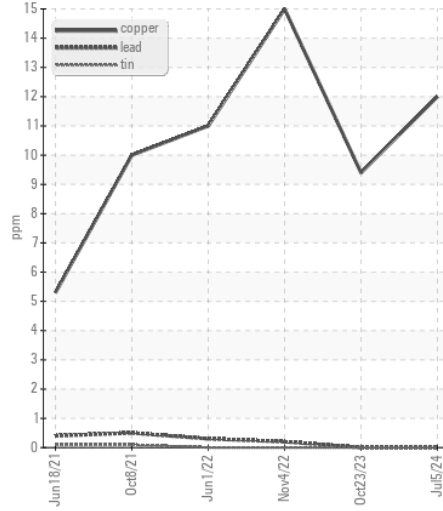

PQ

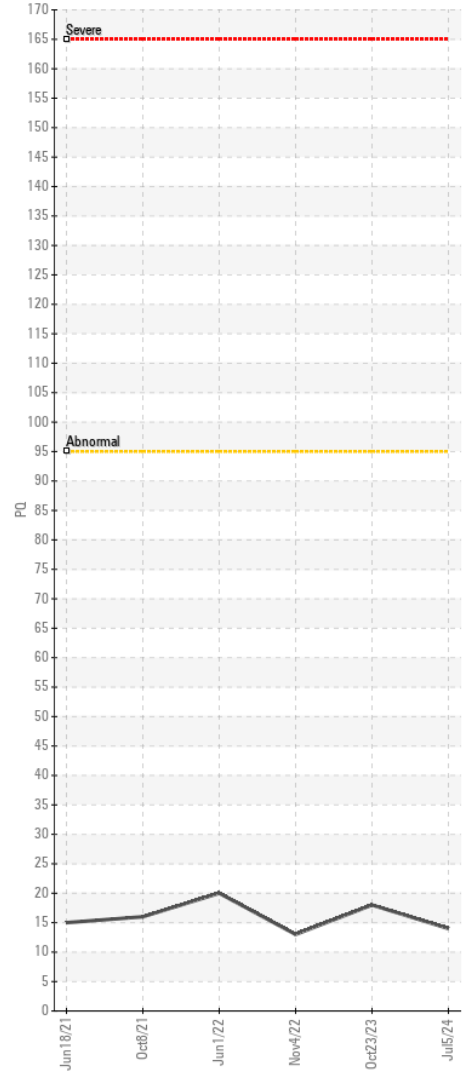

Viscosity @ 40°C

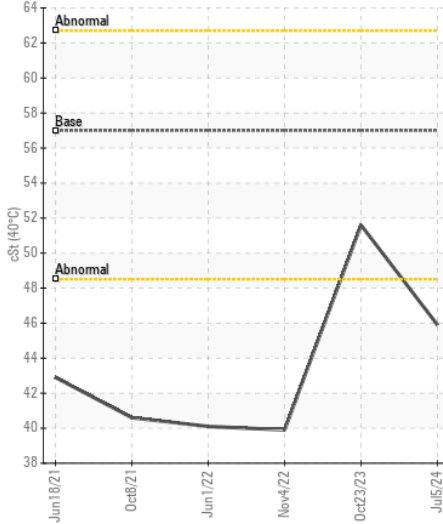

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : JR0132173 Received : 09 Jul 2024
 Lab Number : 06231622 Tested : 10 Jul 2024
 Unique Number : 11115115 Diagnosed : 11 Jul 2024 - Angela Borella
 Test Package : CONST (Additional Tests: PQ)

SUPERIOR PAVING CORP
 5551 WELLINGTON RD
 GAINESVILLE, VA
 US 20155
 Contact: TOM ECKLER
 tomeckler@superiorpaving.net
 T: (703)631-0004
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)