



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	ATTENTION



Machine Id
TEREX TA300 TTHA1189PL811127
Component
Rear Right Final Drive
Fluid
GEAR OIL SAE 80W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0220105	JR0118684	---
Sample Date		Client Info		03 Jul 2024	17 Mar 2022	---
Machine Age	hrs	Client Info		5977	3785	---
Oil Age	hrs	Client Info		2192	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Not Changed	Changed	---
Filter Changed		Client Info		N/A	N/A	---
Sample Status				ATTENTION	NORMAL	---

WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
PQ		ASTM D8184		12	106	---
Iron	ppm	ASTM D5185m	>500	0	148	---
Chromium	ppm	ASTM D5185m	>10	0	1	---
Nickel	ppm	ASTM D5185m	>10	0	0	---
Titanium	ppm	ASTM D5185m		0	<1	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>25	<1	5	---
Lead	ppm	ASTM D5185m	>25	0	0	---
Copper	ppm	ASTM D5185m	>50	0	5	---
Tin	ppm	ASTM D5185m	>10	0	0	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	LIGHT	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION







There is no indication of any contamination in the oil.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Silicon	ppm	ASTM D5185m	>75	4	50	---
Potassium	ppm	ASTM D5185m	>20	0	3	---
Water		WC Method	>0.2	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The oil viscosity is lower than typical, possibly indicating the addition of lighter grade oil. The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sodium	ppm	ASTM D5185m	>170	2	17	---
Boron	ppm	ASTM D5185m	400	0	203	---
Barium	ppm	ASTM D5185m	200	0	0	---
Molybdenum	ppm	ASTM D5185m	12	0	2	---
Manganese	ppm	ASTM D5185m		0	2	---
Magnesium	ppm	ASTM D5185m	12	100	74	---
Calcium	ppm	ASTM D5185m	150	3423	27	---
Phosphorus	ppm	ASTM D5185m	1650	1056	1130	---
Zinc	ppm	ASTM D5185m	125	1247	16	---
Sulfur	ppm	ASTM D5185m	22500	4003	16484	---
Visc @ 40°C	cSt	ASTM D445	143	58.8	131	---

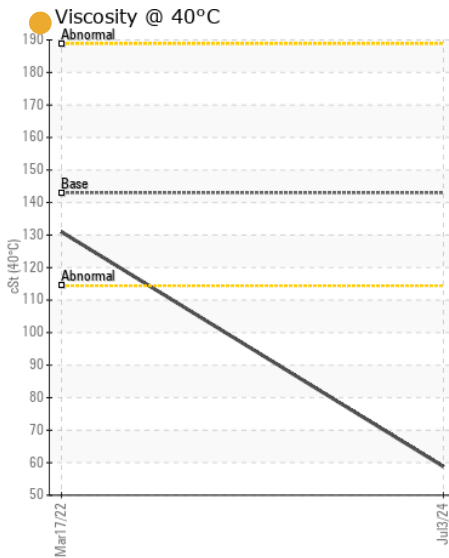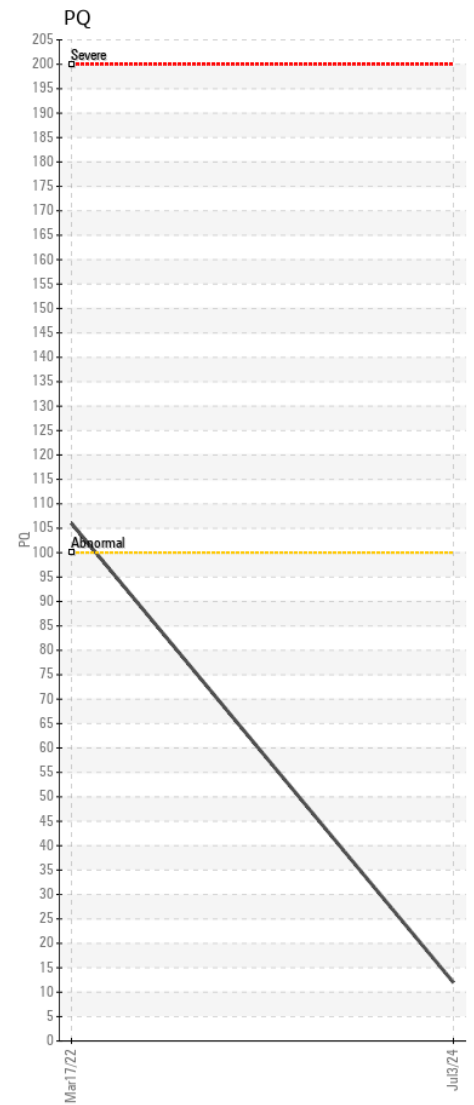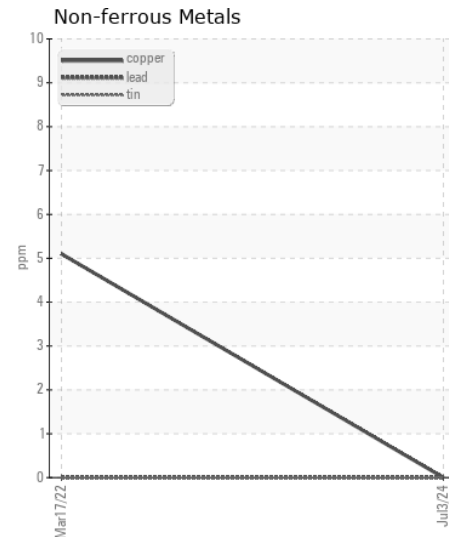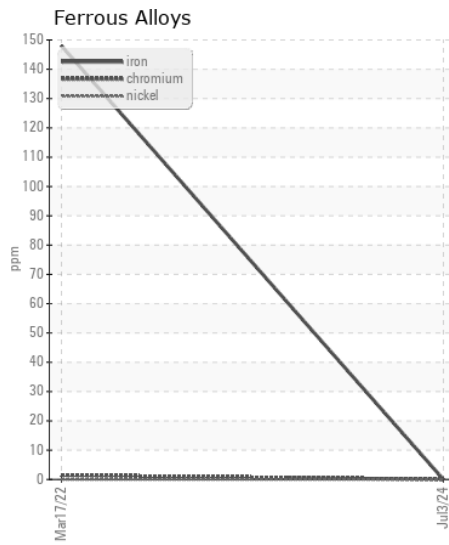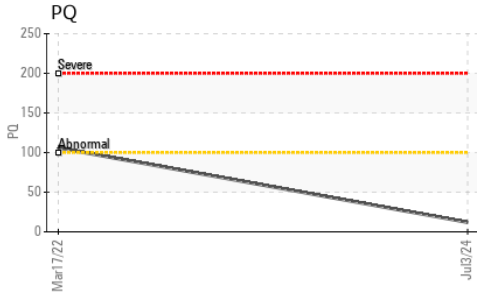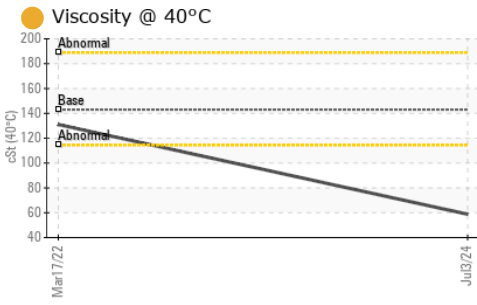

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0220105 **Received** : 09 Jul 2024
Lab Number : 06231644 **Tested** : 10 Jul 2024
Unique Number : 11115137 **Diagnosed** : 11 Jul 2024 - Don Baldrige
Test Package : CONST (Additional Tests: PQ)

JRE - CHARLOTTE
 9550 STATESVILLE ROAD
 CHARLOTTE, NC
 US 28269
 Contact: CHARLOTTE SHOP
 myoung@jamesriverequipment.com
 T: (704)597-0211
 F: (704)596-6198

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)