



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
JOHN DEERE 750K 1T0750KXJLF368013
Component
Left Inner Final Drive
Fluid
JOHN DEERE HY-GARD HYD/TRANS (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0214036	JR0200782	---
Sample Date		Client Info		08 Jul 2024	07 Mar 2024	---
Machine Age	hrs	Client Info		4489	4018	---
Oil Age	hrs	Client Info		471	4018	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Not Changed	Changed	---
Filter Changed		Client Info		N/A	N/A	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>1250	25	49	---
Iron	ppm	ASTM D5185m	>750	16	106	---
Chromium	ppm	ASTM D5185m	>9	0	1	---
Nickel	ppm	ASTM D5185m	>10	0	<1	---
Titanium	ppm	ASTM D5185m		0	<1	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>40	<1	2	---
Lead	ppm	ASTM D5185m	>15	0	4	---
Copper	ppm	ASTM D5185m	>40	0	<1	---
Tin	ppm	ASTM D5185m	>10	0	<1	---
Vanadium	ppm	ASTM D5185m		0	<1	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	5	4	---
Potassium	ppm	ASTM D5185m	>20	0	2	---
Water		WC Method	>0.075	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.075	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	2	3	---
Boron	ppm	ASTM D5185m	6	18	1	---
Barium	ppm	ASTM D5185m	0	0	0	---
Molybdenum	ppm	ASTM D5185m	0	15	<1	---
Manganese	ppm	ASTM D5185m		0	2	---
Magnesium	ppm	ASTM D5185m	145	130	92	---
Calcium	ppm	ASTM D5185m	3570	3258	3165	---
Phosphorus	ppm	ASTM D5185m	1290	1014	922	---
Zinc	ppm	ASTM D5185m	1640	1130	1143	---
Sulfur	ppm	ASTM D5185m		3759	3445	---
Visc @ 40°C	cSt	ASTM D445	57.0	52.0	50.5	---

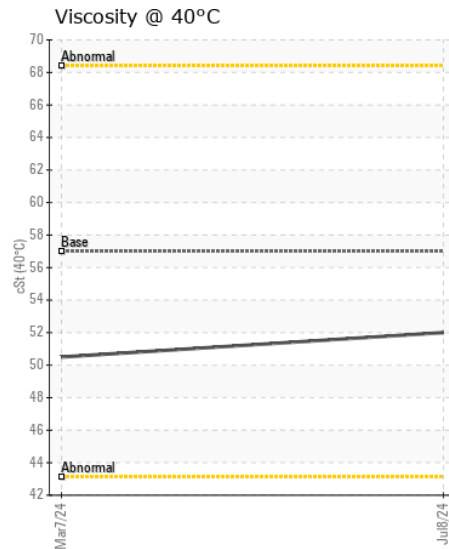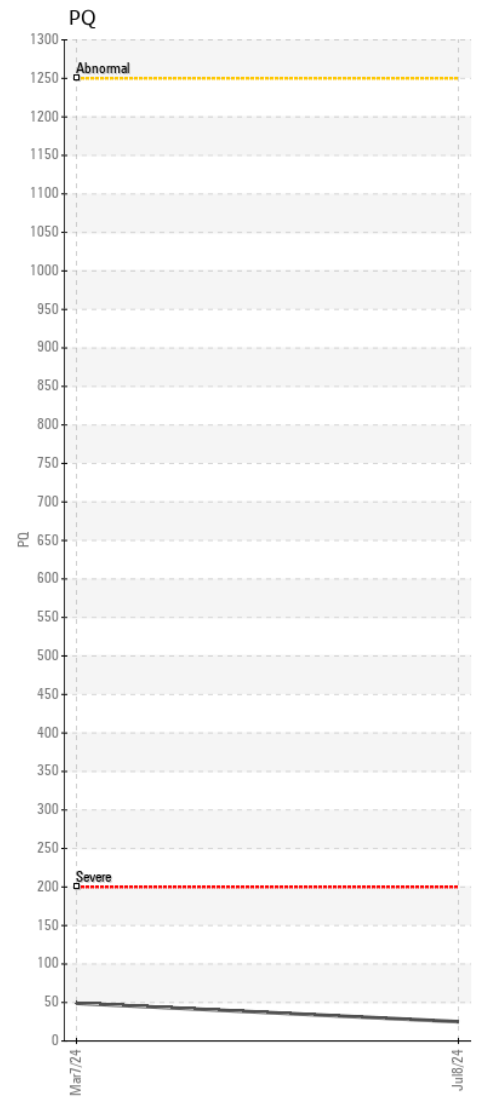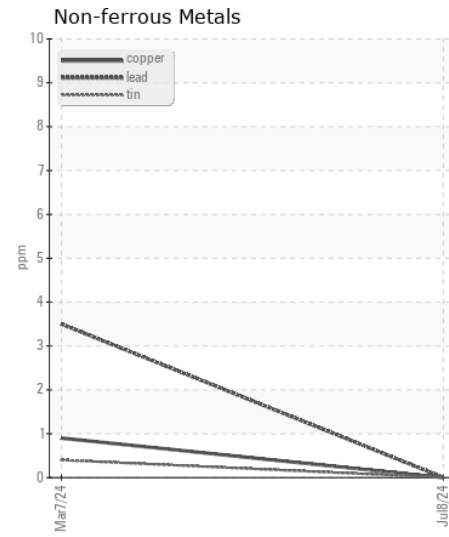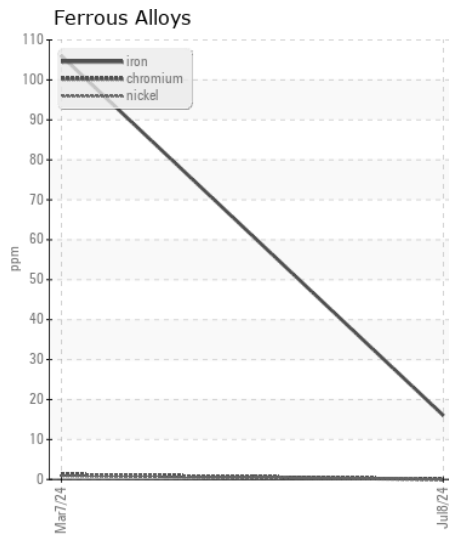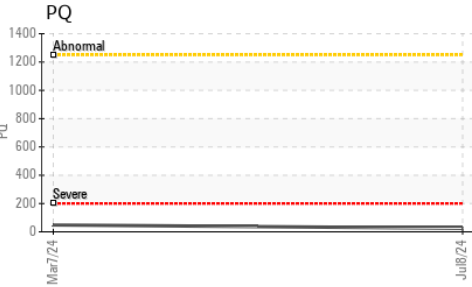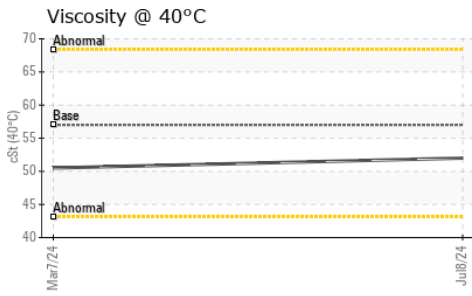

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : JR0214036

Lab Number : 06231672

Unique Number : 11115165

Test Package : CONST (Additional Tests: PQ)

Received : 09 Jul 2024

Tested : 10 Jul 2024

Diagnosed : 10 Jul 2024 - Wes Davis

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

JRE - GREENVILLE

3604 HIGHWAY 264 E

GREENVILLE, NC

US 27834-5800

Contact: GREENVILLE SHOP

christopher.martin@jamesriverequipment.com

T:

F: